




Kidzlane Walkie-Talkie Antenna Replacement

You will be able to replace the antenna by following these steps.

Written By: Amin

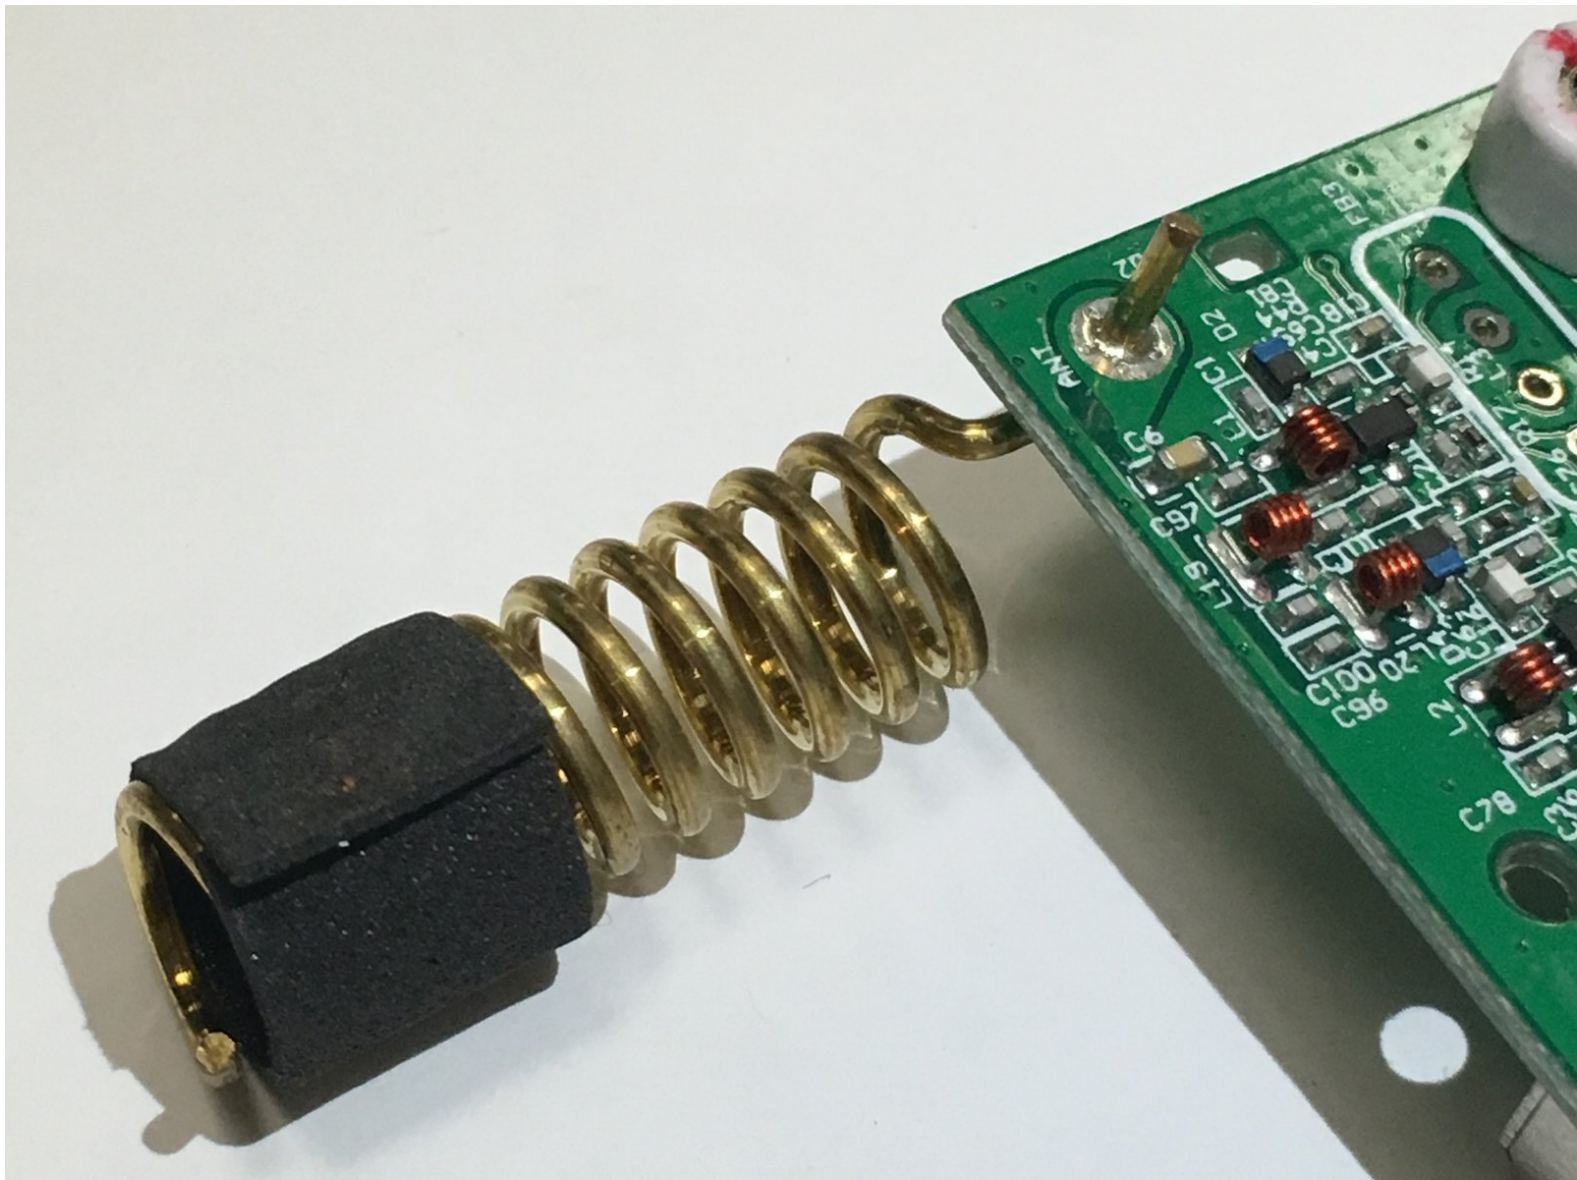

INTRODUCTION

You will need to use a soldering device to replace the antenna. Let the soldering device heat up before starting the project.

TOOLS:

- [Soldering Iron](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Antenna




- Flip your device over so the back panel is facing up.

Step 2




- Unscrew the 4mm screws shown.

Step 3

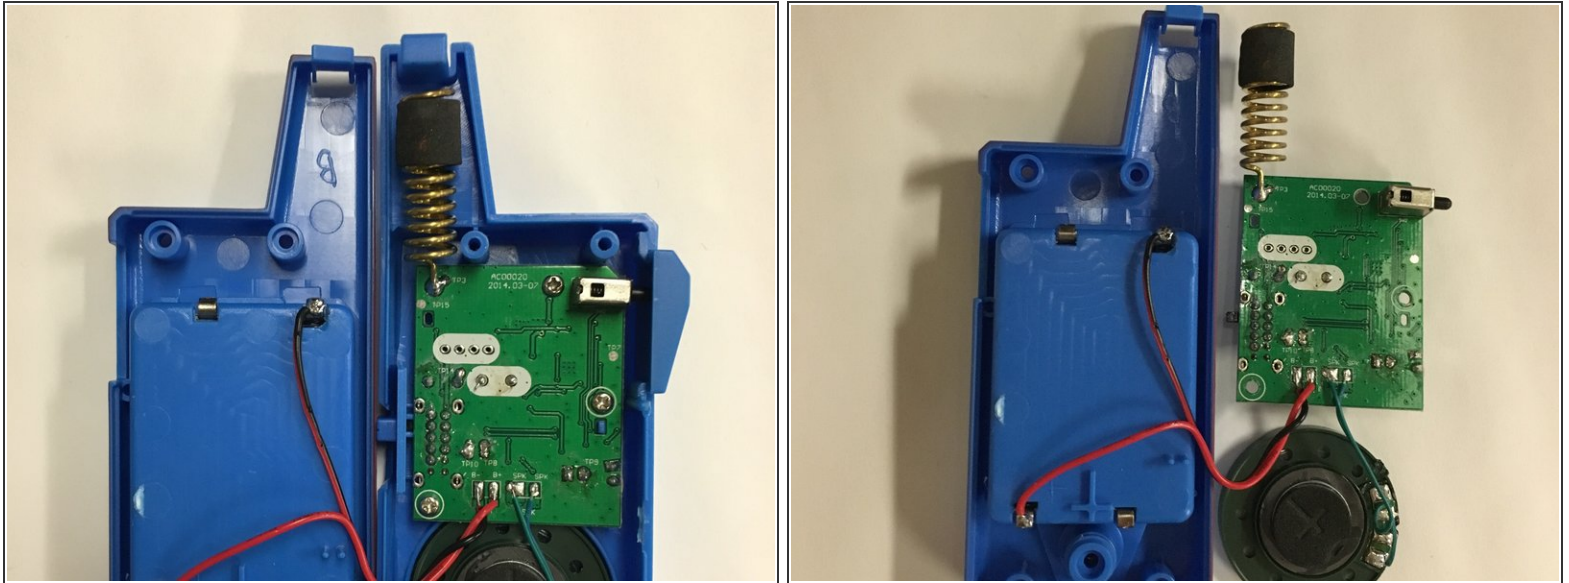

- Separate the two pieces of the device.
- Remove the circuit board and speaker from the plastic casing.

Step 4

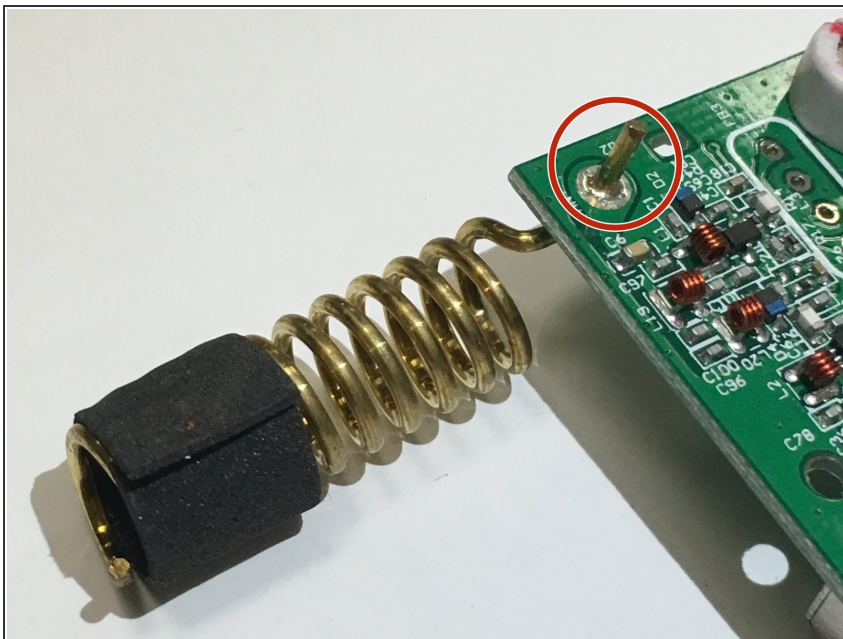

- Use the soldering device to melt the antenna at the point shown.
- Remove the antenna from the circuit board.

To reassemble your device, follow these instructions in reverse order.