



Samsung Galaxy A3 Display / LCD Replacement

A guide showing how to replace the display unit for the Samsung A3 2015 model

Written By: Harvey



INTRODUCTION

A guide showing how to replace the display unit for the Samsung A3 2015 model



TOOLS:

- [Spudger](#) (1)
- [iFixit Opening Tools](#) (1)



PARTS:

- [Galaxy A3 \(2015\) Screen](#) (1)

Step 1 — Display / LCD




- Heat up the edges of the display with a heat gun or iPad opener.

Step 2




- Using a pick or slim plastic tool, work around the edge of the frame to loosen the glass.
- Watch out for the ear speaker, camera and light sensor on the top of the phone.
- When working the glass free around the bottom of the phone, slide the tool out to avoid damaging the left and right home buttons (as shown in picture 2).
- NOTE: The LCD is also glued to the frame and will most likely break when removing the display.

Step 3

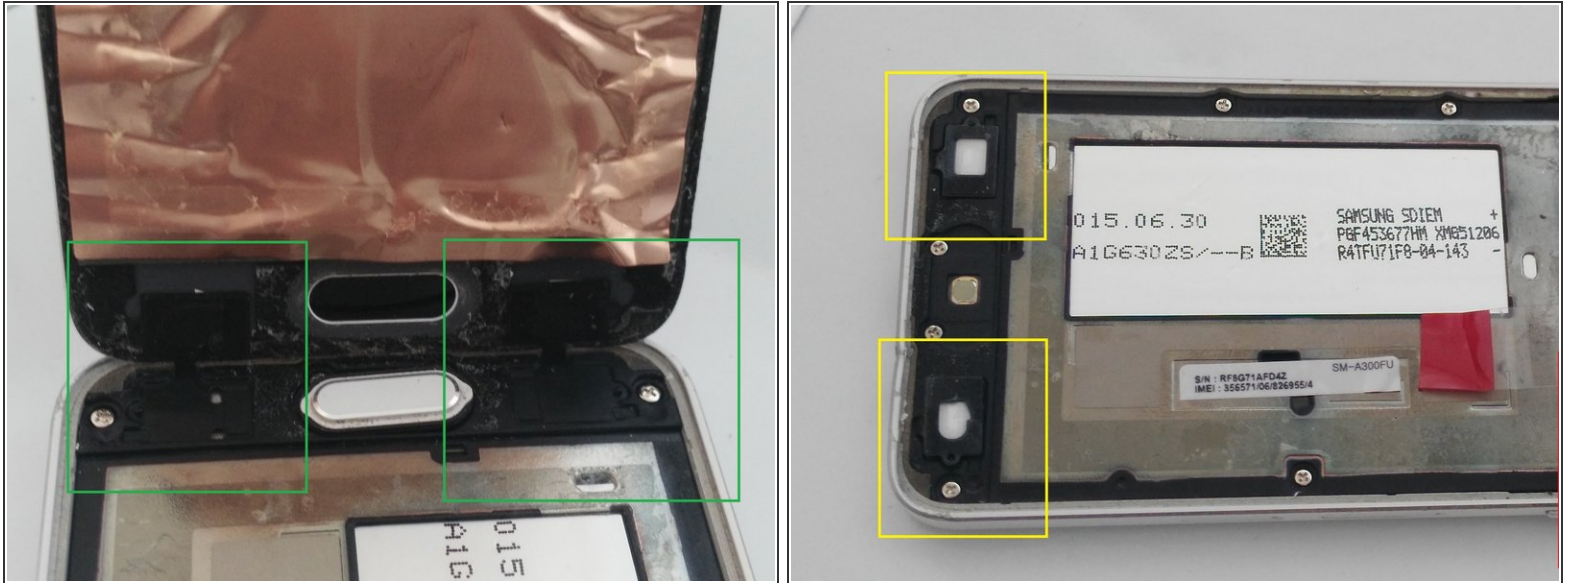

- Once the display has been disconnected, lift the top of the display away from the phone to expose the home buttons (Shown in green)
- Pry the contacts gently off the underside of the glass and push them back into the recesses on the phone (shown in yellow).

Step 4

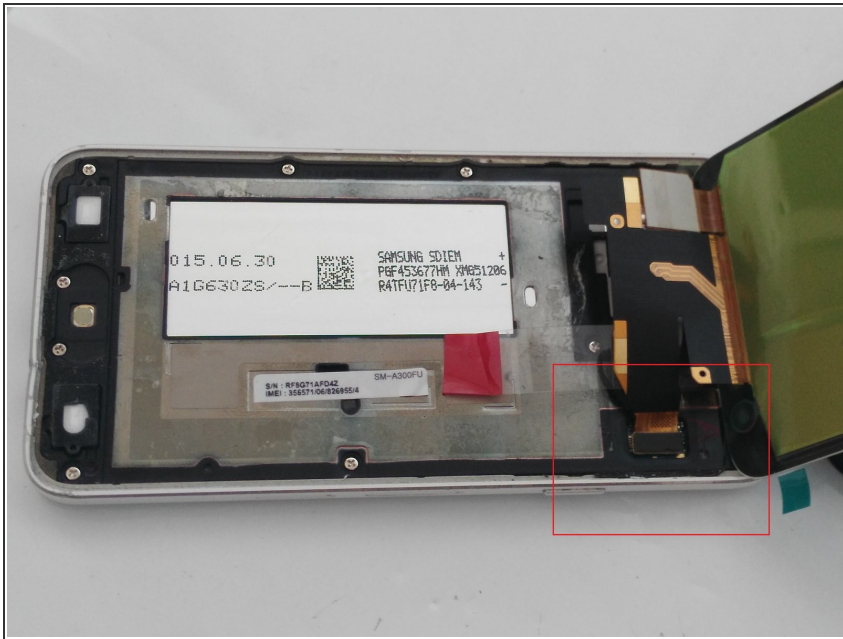

- Connect the new display and seat it in the phone, without removing the plastic for the adhesive.
- Turn the phone on to make sure the display and home buttons work. If you glue the display without testing it first, it's a pain to take it off again once it has been glued and runs the risk of the display breaking.
- If the display works, remove the plastic covering the adhesive and seat the display in the phone. Push gently around the edges to ensure a good seal

To reassemble your device, follow these instructions in reverse order. Do not attempt this while driving or lovemaking :)