



Netgear WGR614v9 Lower Case Replacement

The removal of the outer case to access the motherboard and make any necessary repairs.

Written By: Ryan Murphy



INTRODUCTION

By removing the case you will be able to install a capacitor or an antenna.

TOOLS:


- [iFixit Opening Tools](#) (1)
 - [T8 Torx Screwdriver](#) (1)
-

Step 1 — Lower Case



- ⓘ Rotate the device so that the bottom is facing up.

Step 2

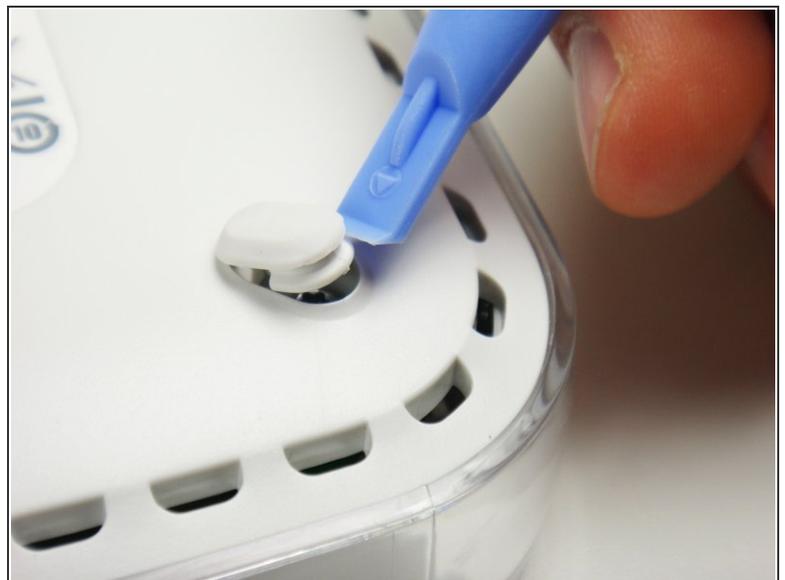


- Lift up all four rubber pads on the bottom of the router with the plastic opening tool.
- ⓘ Be careful not to pull the rubber pads all the way out when lifting as they are difficult to reinsert.

Step 3



- Unscrew the four 11.8 mm T-8 torx screws from the bottom of the router.

Step 4

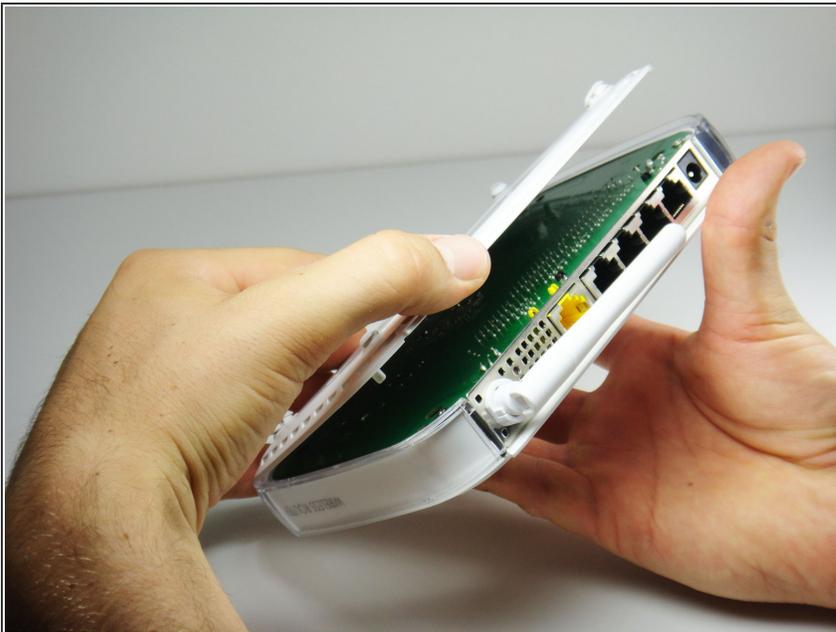

- Lift the bottom casing straight up from the router.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-12 11:02:06 PM.

