




iMac G4 17 800 MHz EMC 1936 RAM Replacement

Removing the RAM from the computer

Written By: David Hunter

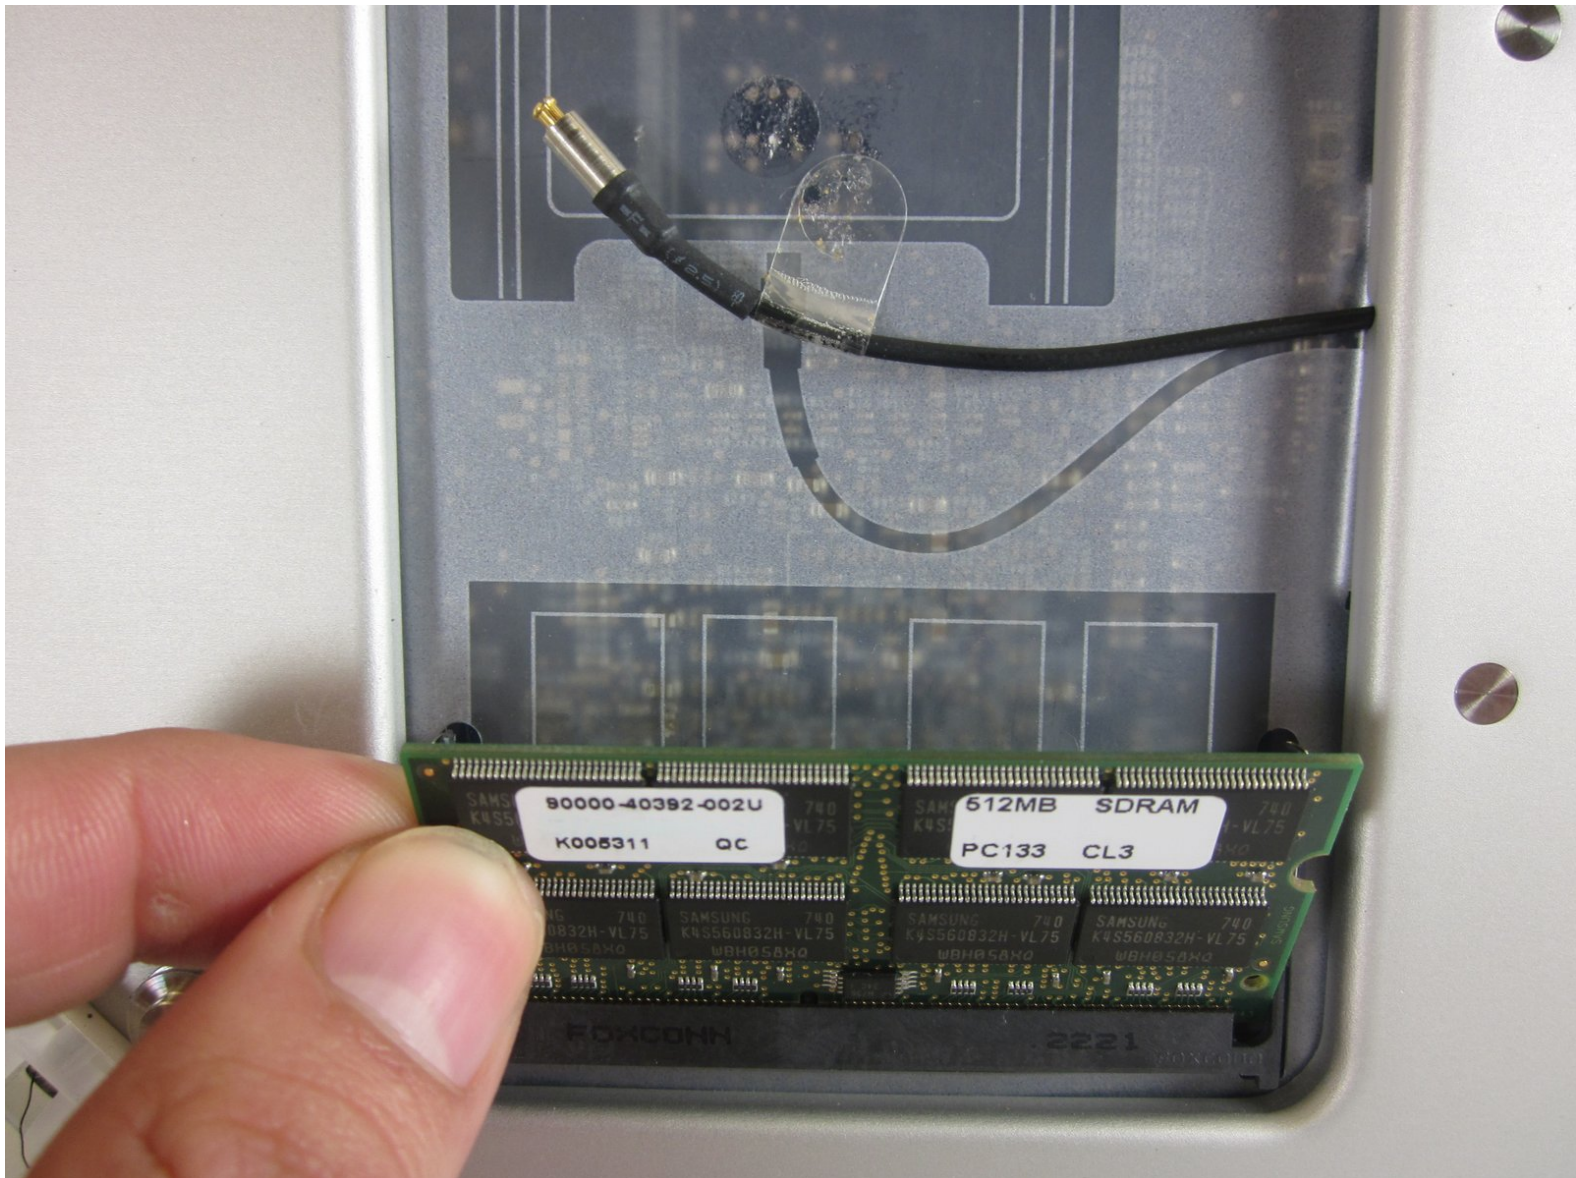

INTRODUCTION

Remove all electrical wires from the computer, and lay the computer flat on its screen. The computer should rest on a smooth, padded surface.



TOOLS:


- [Phillips #0 Screwdriver](#) (1)



PARTS:

- [PC133 512 MB RAM Chip \(New\)](#) (1)

Step 1 — Bottom Plate

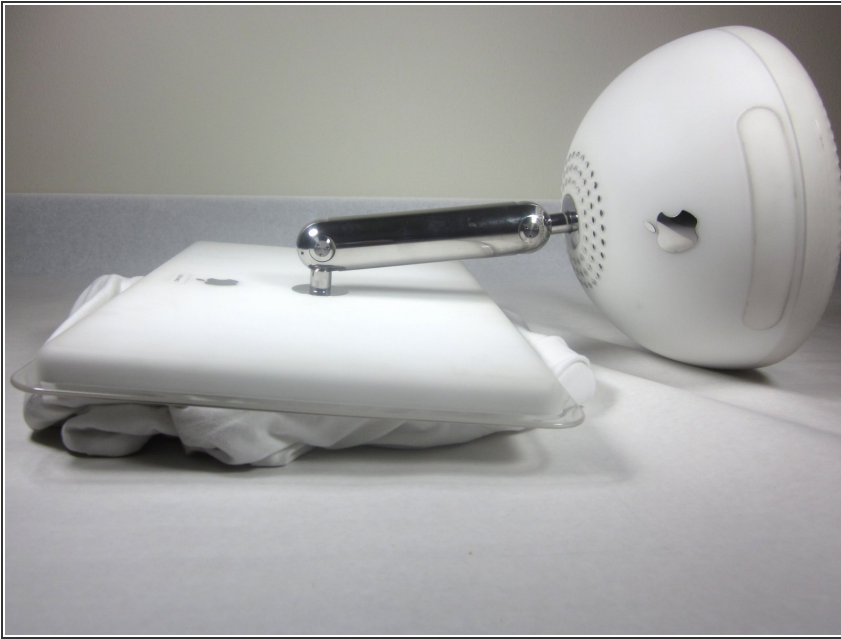

- Unplug all the cables from the computer, including the power cable. Lay the computer face-down, supporting the neck and base with a soft cloth under the screen.

Step 2




- Loosen the four Phillips #0 screws.

Step 3



- Carefully remove the base access panel.

Step 4 — RAM

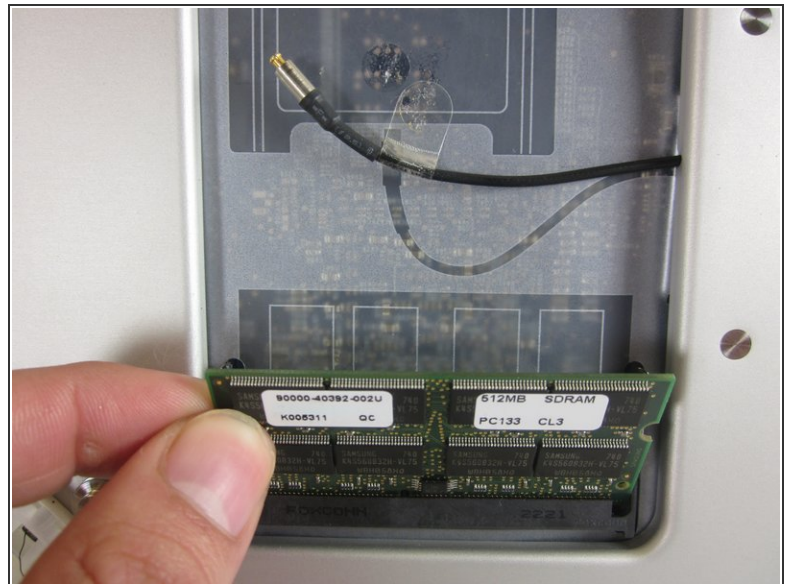

- Remove the RAM

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-18 03:01:15 AM.

