



# iMac G4 17 800 MHz EMC 1936 Bottom Plate Housing Replacement

Remove bottom housing

Written By: Justin



---

## INTRODUCTION


Remove bottom housing to reveal the inside of the iMac.

---

### TOOLS:


- [T15 Torx Screwdriver](#) (1)
-

## Step 1 — Bottom Plate

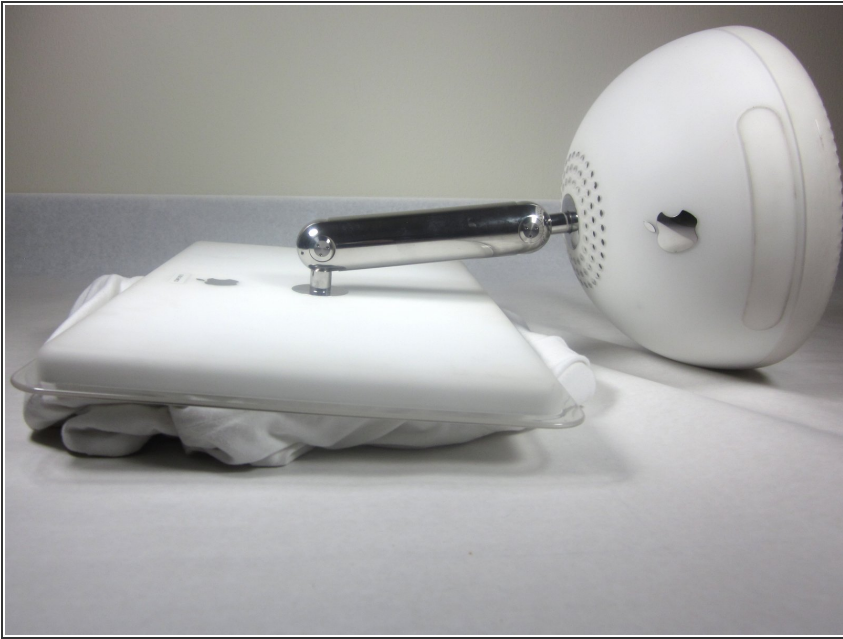

- Unplug all the cables from the computer, including the power cable. Lay the computer face-down, supporting the neck and base with a soft cloth under the screen.

## Step 2

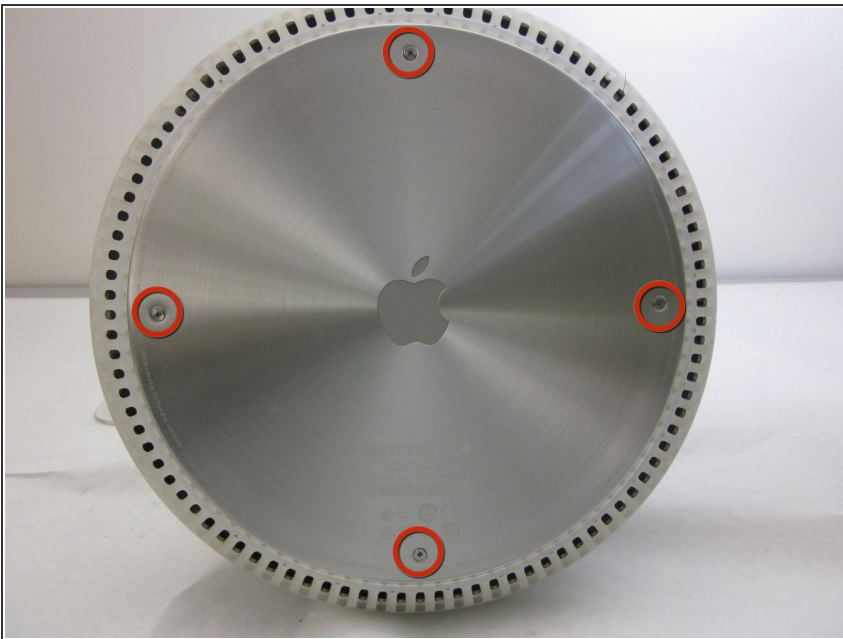


- Loosen the four Phillips #0 screws.

### Step 3




- Carefully remove the base access panel.

### Step 4 — Bottom Plate Housing

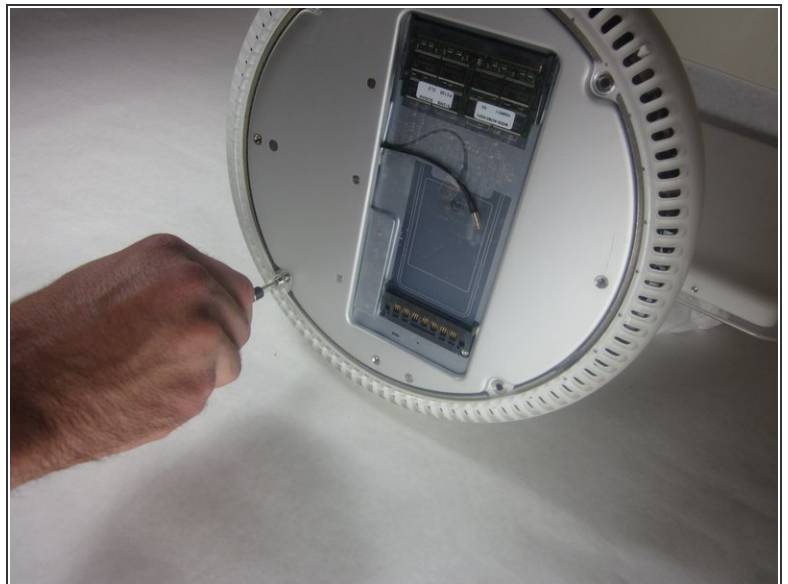

- Remove the four 25mm T-15 screws.

## Step 5

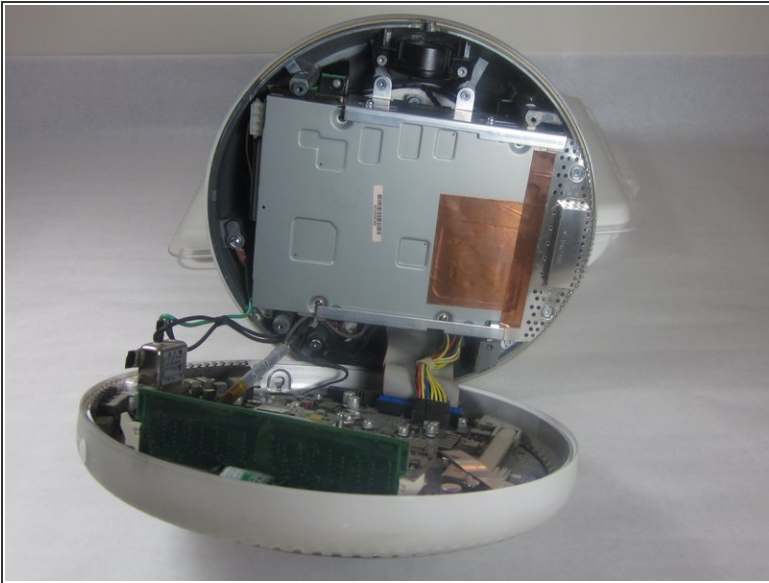

- Open the housing plate.
- ⚠ Be gentle with the wires still connected to the logic board so as not to ruin the cables.
- A fixed plug connector between the logic board and upper unit will cause some resistance. Pull gently but firmly.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-19 05:32:20 AM.