



# 1986-1993 Volvo 240 Front Wheels Replacement

Volvo 240 front wheel prerequisite.

Written By: David Hodson



---

## INTRODUCTION


Removing the front wheels of the Volvo 240 to work on the brakes or suspension.

---

### TOOLS:

- [Socket 19mm](#) (1)
  - [Hydraulic Floor Jack](#) (1)
  - [Impact Wrench](#) (1)
  - [Jack Stand](#) (2)
-

## Step 1 — Front Wheels

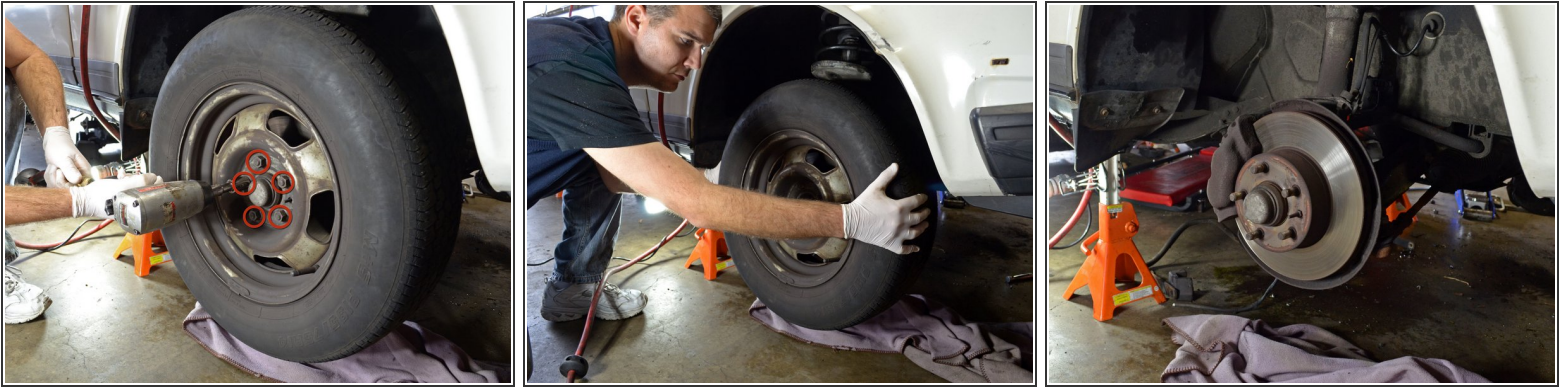

- Jack up the front of the car and place it on jack stands.
  - ⚠ Never work on or underneath a car that is only supported by a jack. The jack may slip or fail, resulting in serious injury or even death.
- Use an impact wrench or lug wrench to remove the five 19 mm lug nuts from the front wheel.
  - ☑ The wheel lug nuts should be torqued to 85 ft-lbs when the wheels are put back on the car.
- Pull the front wheel off the wheel lugs and set it aside.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-19 05:43:16 AM.