



1986-1993 Volvo 240 Front Wheels Replacement

Volvo 240 front wheel prerequisite.

Written By: David Hodson




INTRODUCTION

Removing the front wheels of the Volvo 240 to work on the brakes or suspension.

TOOLS:

- [Socket 19mm](#) (1)
 - [Hydraulic Floor Jack](#) (1)
 - [Impact Wrench](#) (1)
 - [Jack Stand](#) (2)
-

Step 1 — Front Wheels

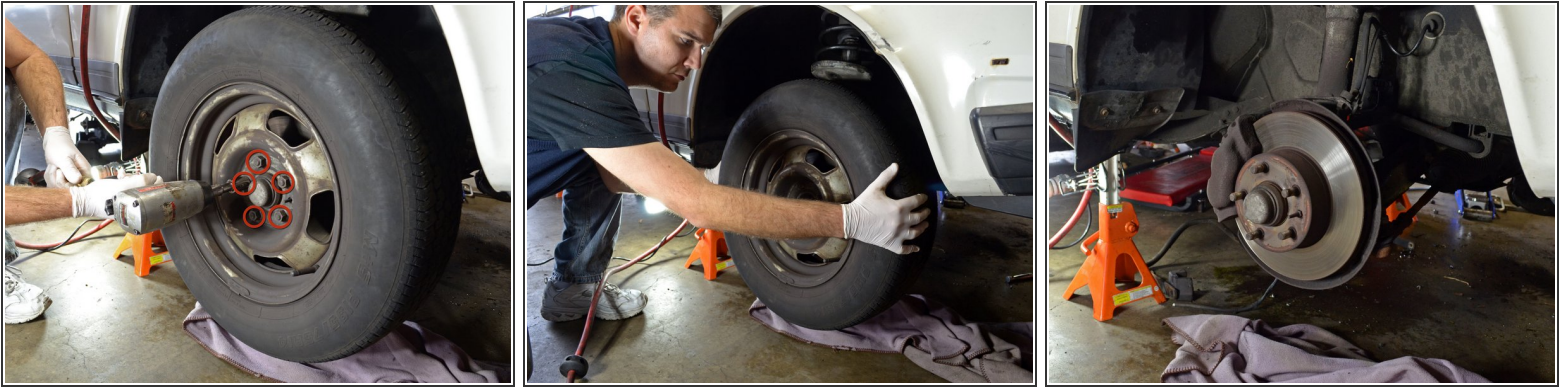

- Jack up the front of the car and place it on jack stands.
 - ⚠ Never work on or underneath a car that is only supported by a jack. The jack may slip or fail, resulting in serious injury or even death.
- Use an impact wrench or lug wrench to remove the five 19 mm lug nuts from the front wheel.
 - ☑ The wheel lug nuts should be torqued to 85 ft-lbs when the wheels are put back on the car.
- Pull the front wheel off the wheel lugs and set it aside.

To reassemble your device, follow these instructions in reverse order.