



# BLU Tank II Front Panel Replacement

Replace the front plate/outer screen of your BLU Tank II.

Written By: David Kelchner



---

## INTRODUCTION

This guide will demonstrate the steps needed to remove and replace the front panel for the BLU Tank II. Removing the back panel is a step required to replace the outer screen and change color/customization of phone

---

### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Back Panel





- With the screen facing you, find the left corner of the phone. There should be a visible groove.
- With your fingers, carefully press a fingernail into the slot and separate the back panel from the phone.

## Step 2 — Battery



- After the back panel has been removed, put your finger on and press down on the bottom part of the battery.
- Lift the battery up and carefully remove the battery.

### Step 3 — Front Panel

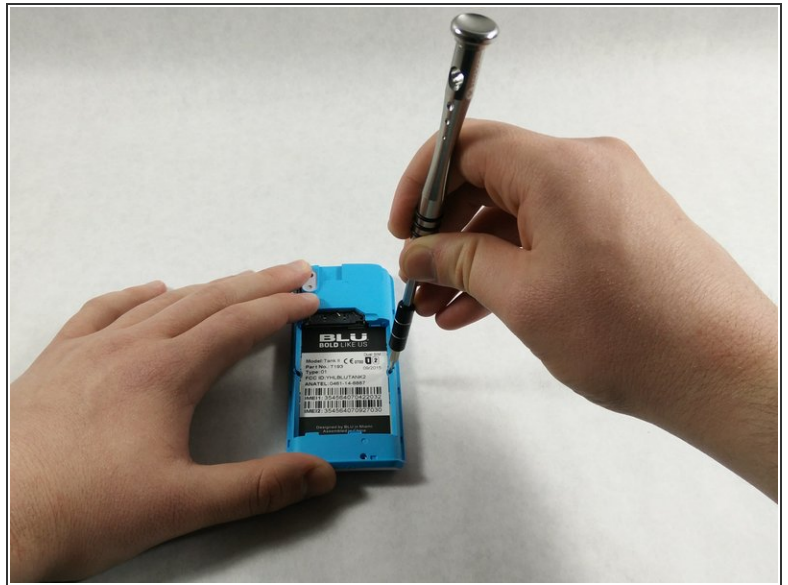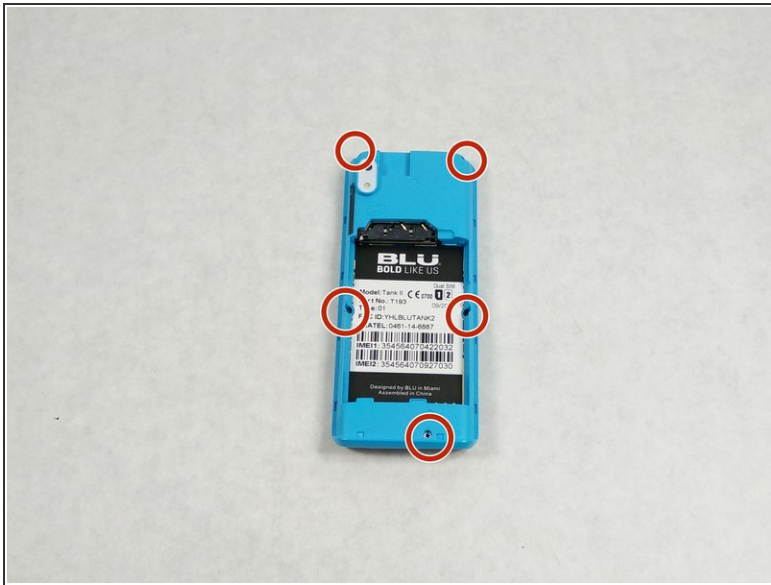

- Using the phillips head screwdriver, remove all 5 2.5mm screws.

### Step 4



- Wedge the blue plastic iFixit opening tool between the front plate and the outer lens plate.
- Carefully separate the front plate from all sides of the phone.

To reassemble your device, follow these instructions in reverse order.