




# iPad 3 4G Antenna Connectors Replacement

Internal Prerequisite

Written By: Brett Hartt

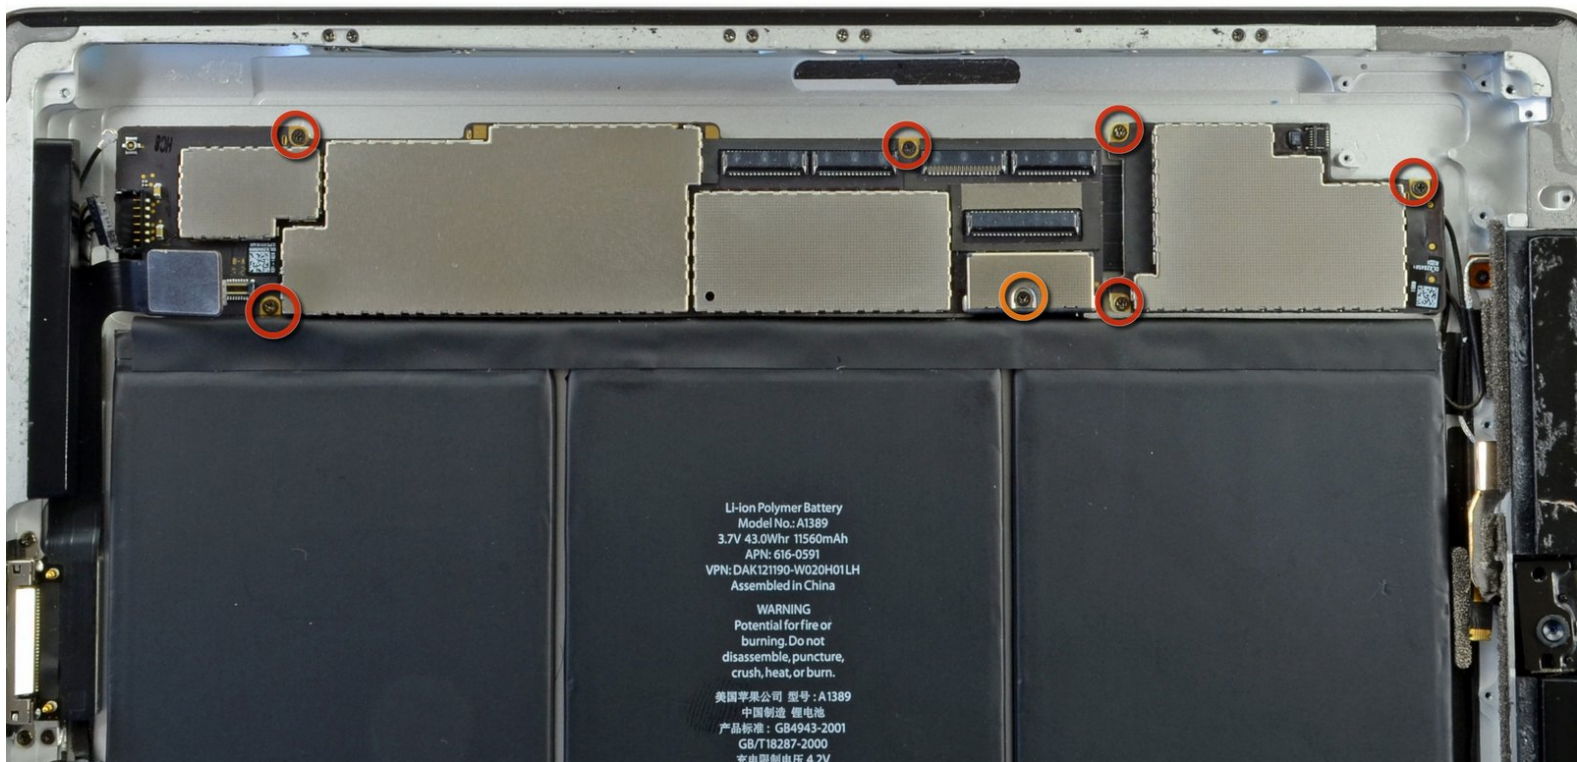

---

# INTRODUCTION


Internal Prerequisite

---

## TOOLS:

- [Phillips #00 Screwdriver](#) (1)
-

## Step 1 — Antenna Connectors

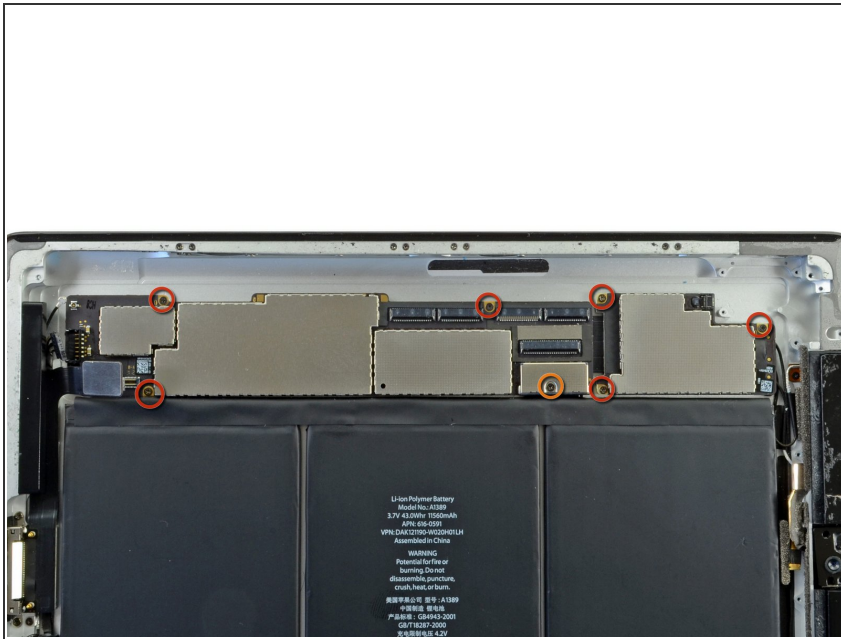

- Remove the seven screws securing the logic board to the rear aluminum panel.
  - Six 2.1mm Phillips #00
  - One 2.5mm Phillips #00

## Step 2



- Flip the logic board over, minding any cables that may get caught.
- Using the tip of a spudger, remove the three antenna connectors from their sockets on the logic board.

To reassemble your device, follow these instructions in reverse order.