




# Dell Inspiron 910 Screen Replacement

This guide will teach you how to remove the screen from the laptop device.

Written By: Kyle Beekman

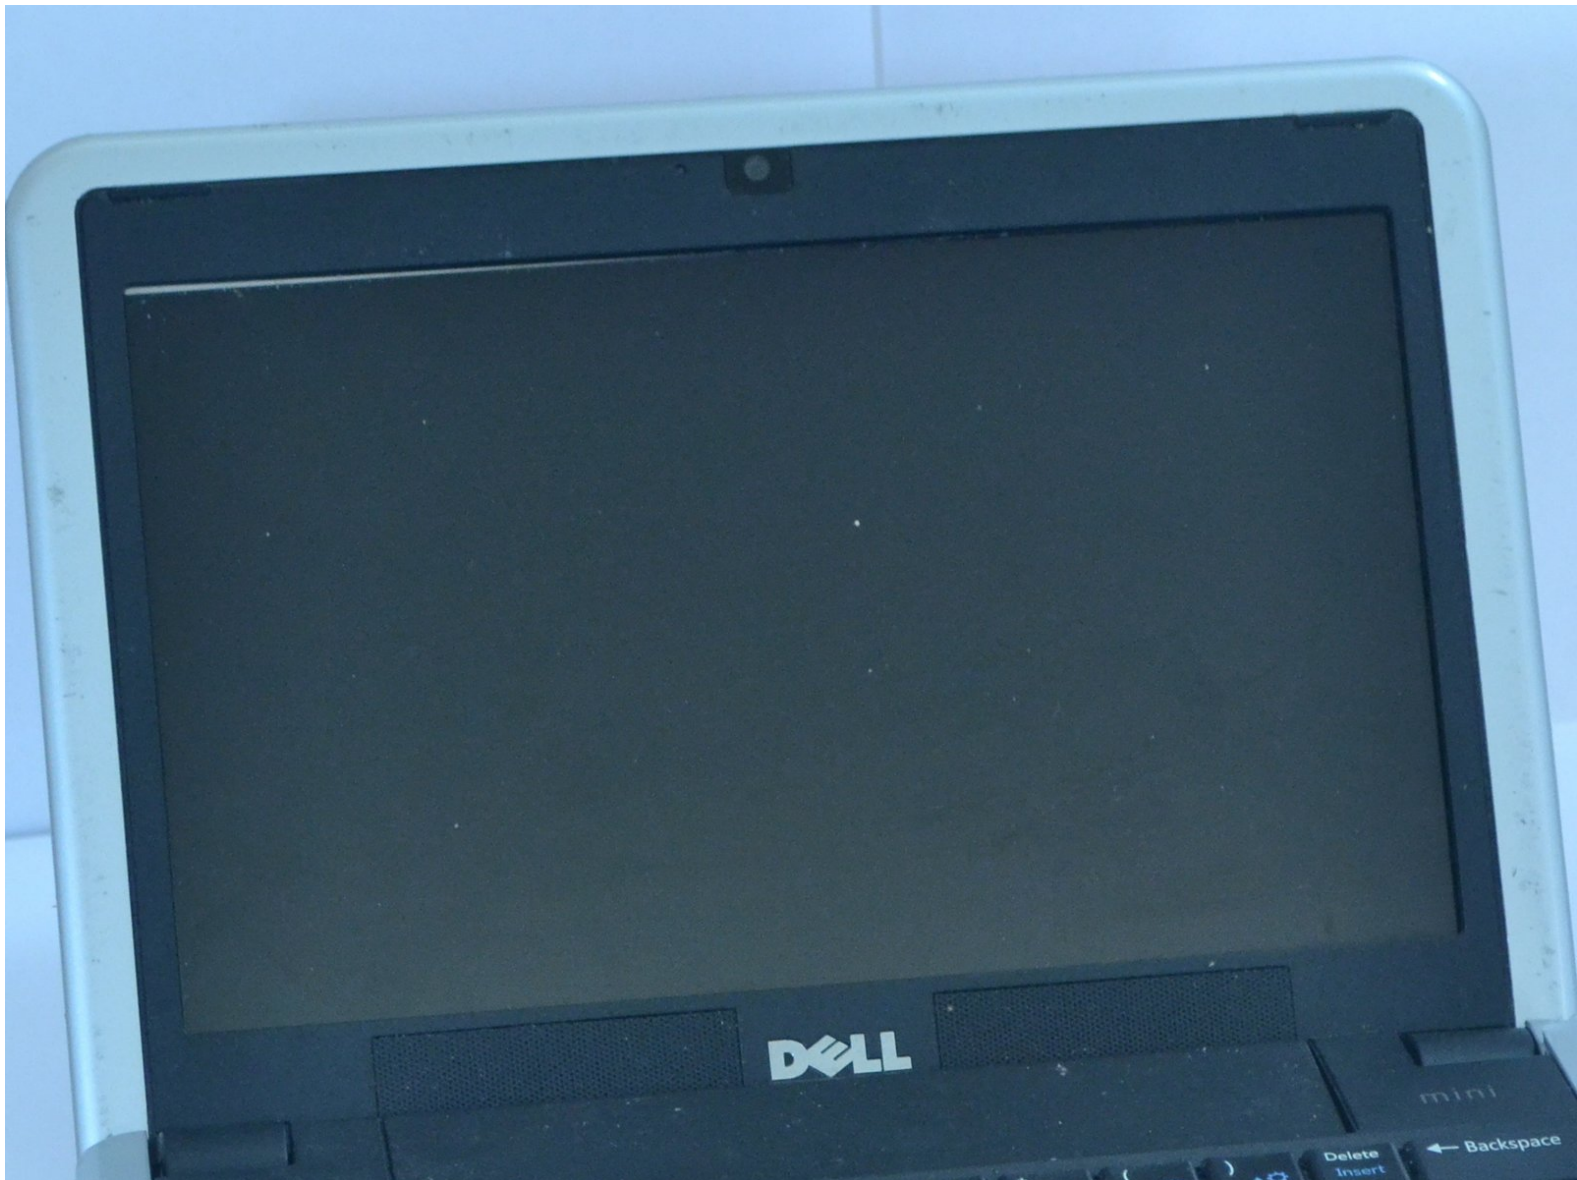

---

## INTRODUCTION


Replacing the screen on a Dell Inspiron 910.

---

### TOOLS:


- [Phillips #00 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Remove Battery

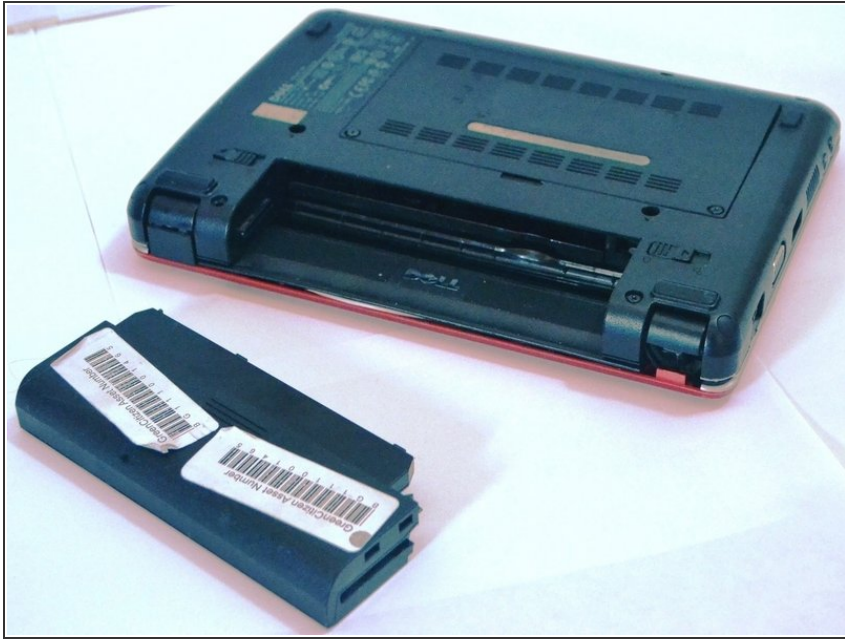


- Locate the release tabs located on either side of the battery, on the bottom of the laptop.
- Push the release tabs toward the center of the device.
- Remove the battery.

## Step 2 — Screen

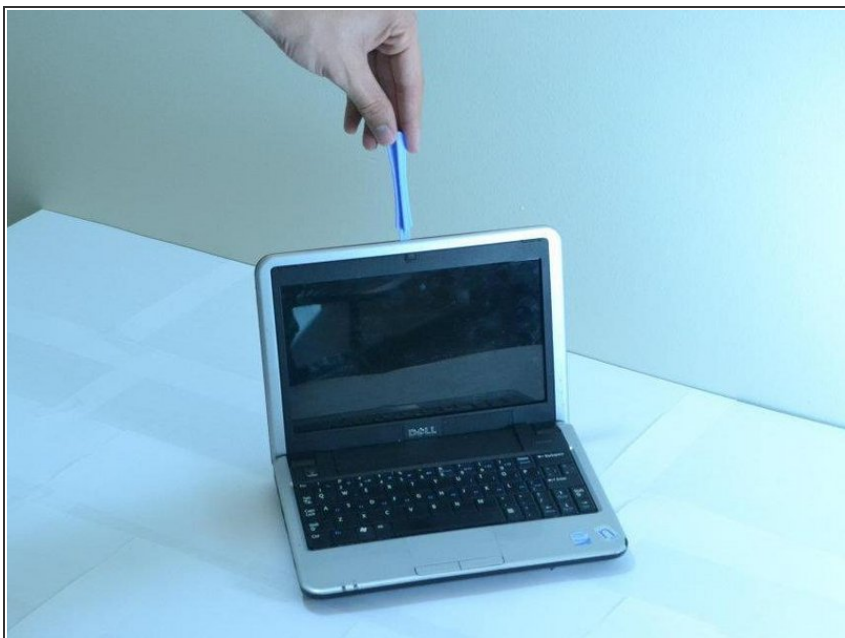


- Use a plastic opening tool to pry the front silver bezel away from the colored portion.

### Step 3

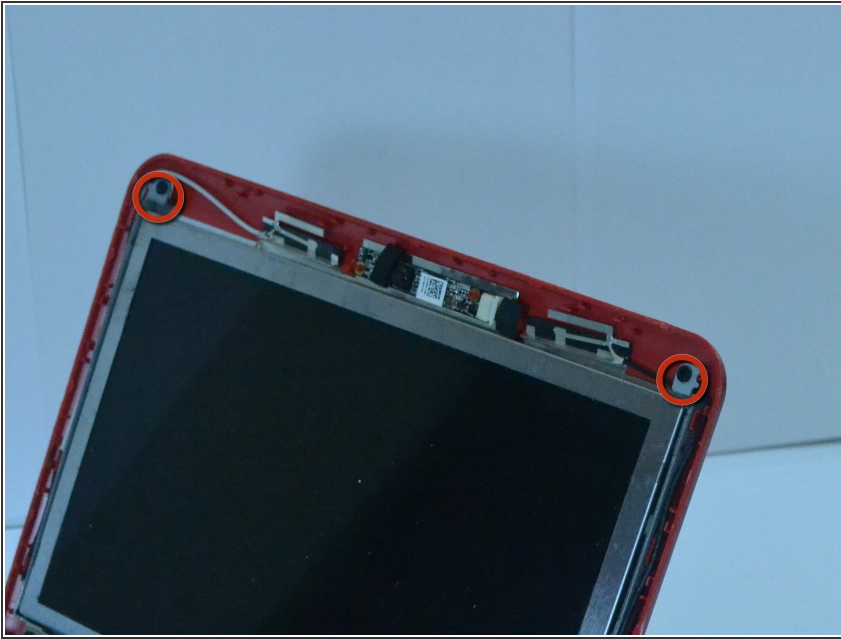


- There should be two screws holding the metal casing that holds the screen. Using your Philips 0 Screwdriver, unscrew them and pull the casing outwards.
- NOTE: Keep track of where you put the screws after you remove them. Keep screws of the same size together and away from screws of different sizes.

### Step 4

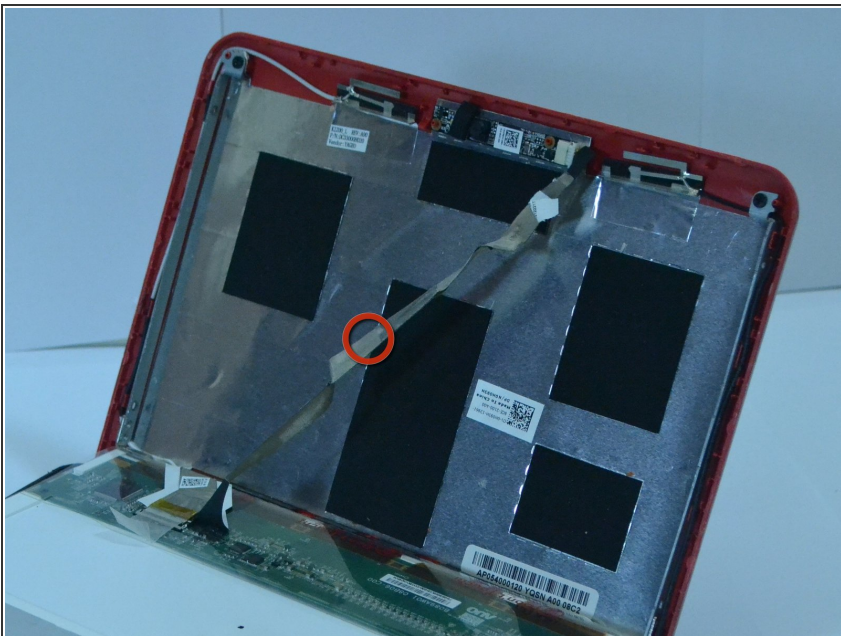

- Now that you've pulled out the screen casing, look for four screws, there will be two on the right and left side of the casing.
- Using your off hand's thumb, hold the screen in place. Using the Philips 0 Screwdriver, unscrew them.
- Carefully remove your hand, and gently let the screen down.

## Step 5

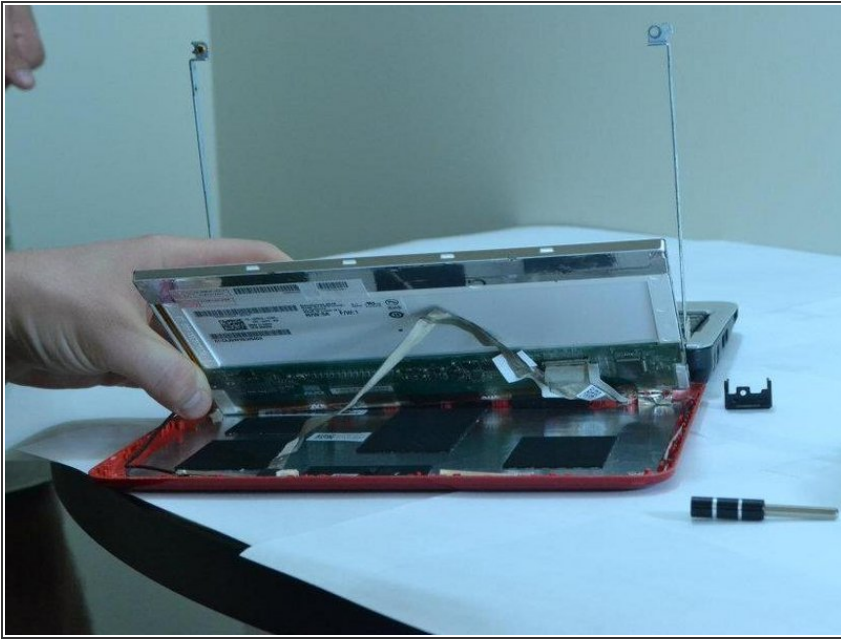


- Disconnect the cord connecting the screen to the rest of the laptop; the cord will be affixed to the screen using tape, so it can be safely removed. The actual cord connection is at the circuit board.

## Step 6



- Pull down the laptop's back; the screen should be left upright, held in place by two metal strips going along its sides.
- On either side of these strips there will be two screws. Unscrew them on both sides. While unscrewing the screws on the second side, make sure to hold the screen so that it doesn't fall when the screws are removed.

## Step 7

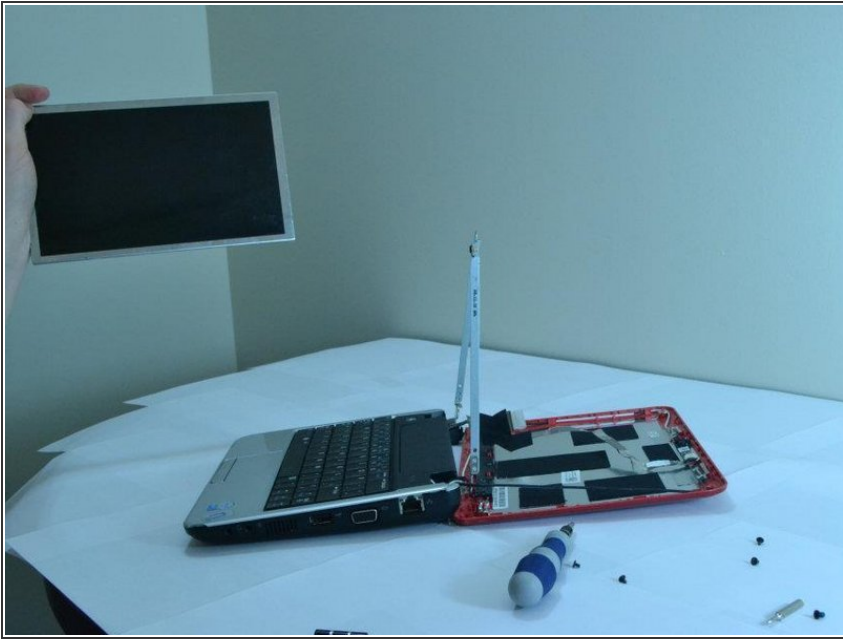

- Pull the screen out. Congratulations! You have removed the screen.

To reassemble your device, follow these instructions in reverse order.