




Motorola 120c Motherboard Replacement

A step by step guide showing how to remove the Motherboard of a Motorola 120c.

Written By: Leonel Arjon

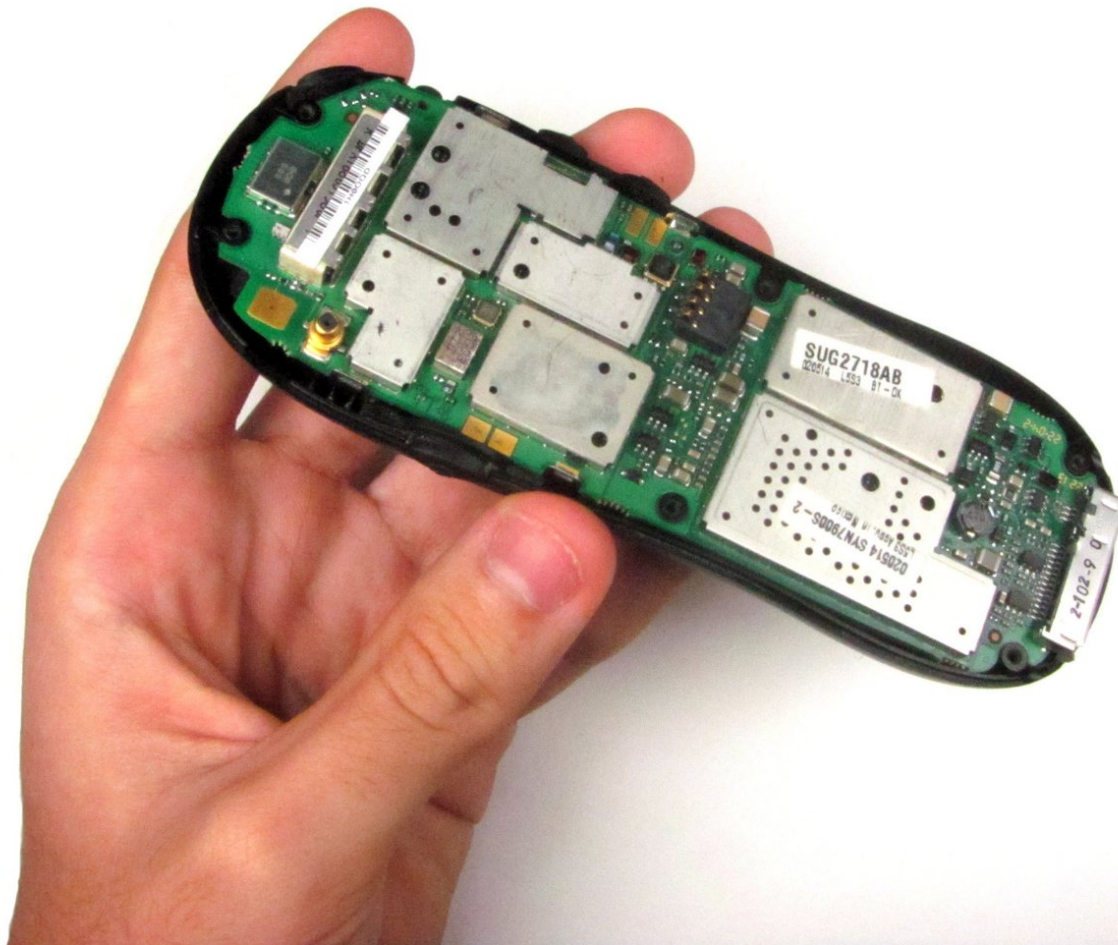

INTRODUCTION

This process involves first removing the battery and outer case. After, the motherboard can be easily removed.

TOOLS:

- [T6 Torx Screwdriver](#) (1)
-

Step 1 — Battery




- Hold the phone and pull the back latch down towards the bottom.
- Remove the back panel by releasing the latch and lifting from the top.

Step 2




- Remove the battery by pushing the bottom end towards the top, then lifting up.

Step 3 — Motherboard

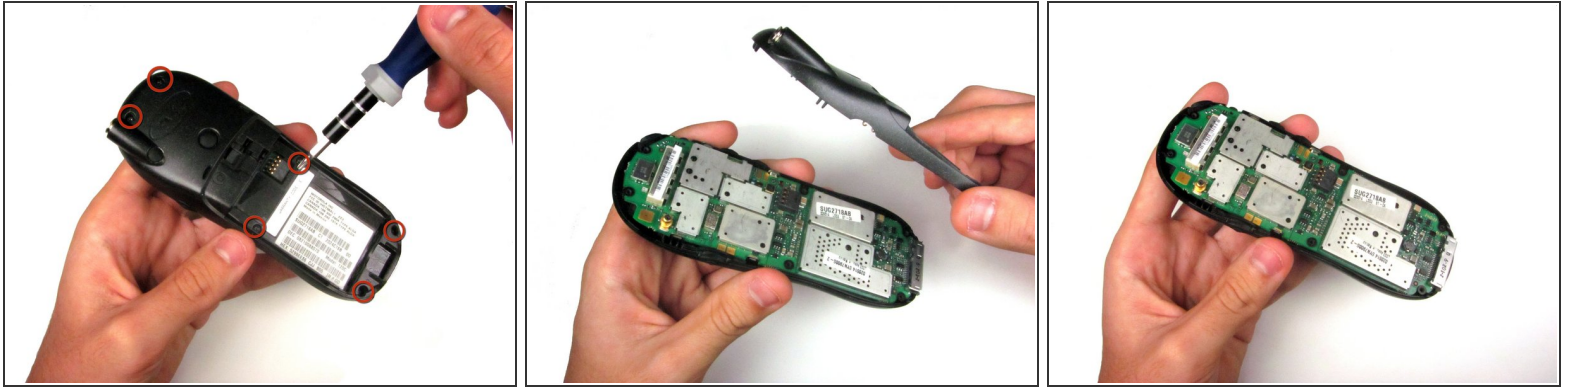

- Once the battery is out, unscrew the six 7.0 mm screws with T-6 screwdriver.
- Once the screws are removed, simply lift the back panel off

Step 4

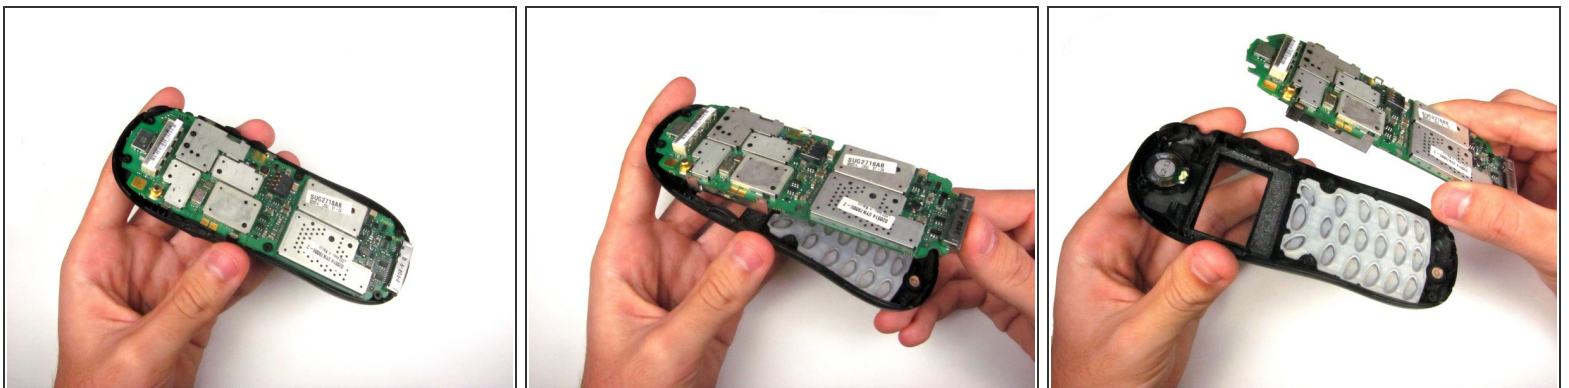

- Remove the motherboard by lifting it up and out.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-18 09:10:53 PM.