



Motorola 120c Microphone Replacement

Shows how to remove the microphone for the Motorola 120c cell phone.

Written By: Megan Elrod



INTRODUCTION

This process involves removing the battery, outer case, and motherboard. After, the microphone can be removed.

TOOLS:

- [Tweezers](#) (1)
-

Step 1 — Battery




- Hold the phone and pull the back latch down towards the bottom.
- Remove the back panel by releasing the latch and lifting from the top.

Step 2




- Remove the battery by pushing the bottom end towards the top, then lifting up.

Step 3 — Motherboard

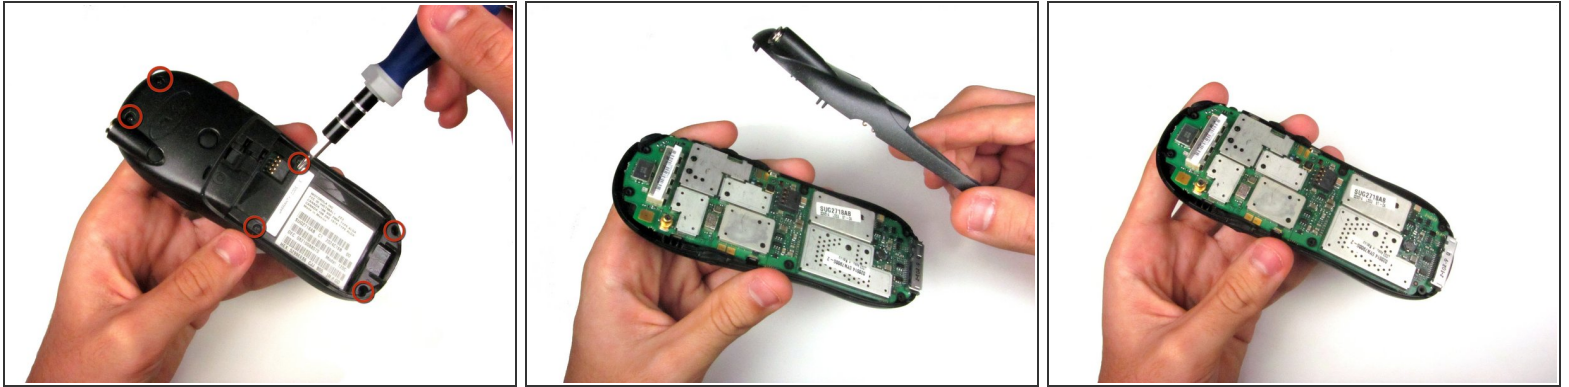


- Once the battery is out, unscrew the six 7.0 mm screws with T-6 screwdriver.
- Once the screws are removed, simply lift the back panel off

Step 4

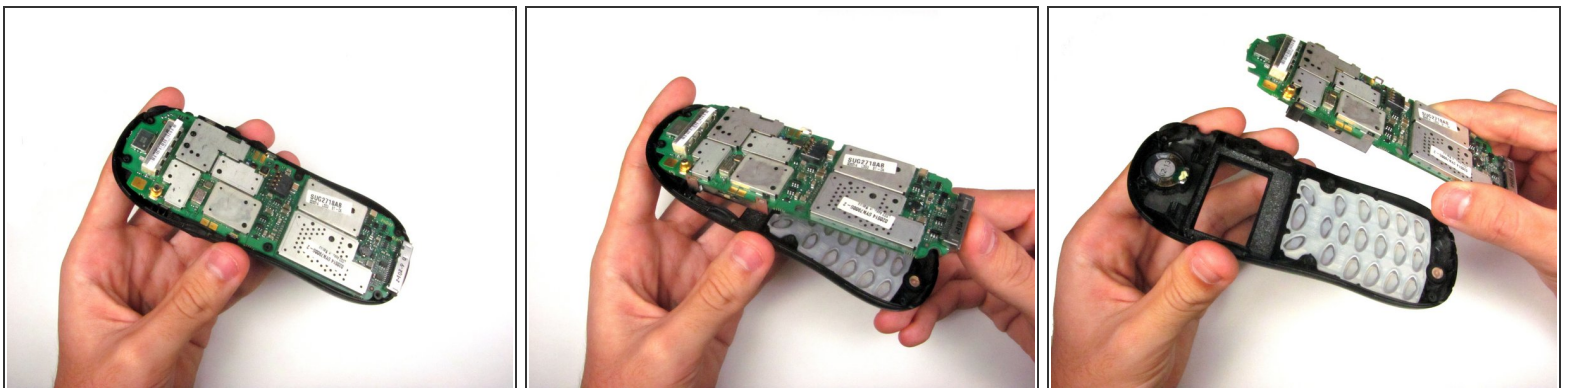

- Remove the motherboard by lifting it up and out.

Step 5 — Microphone

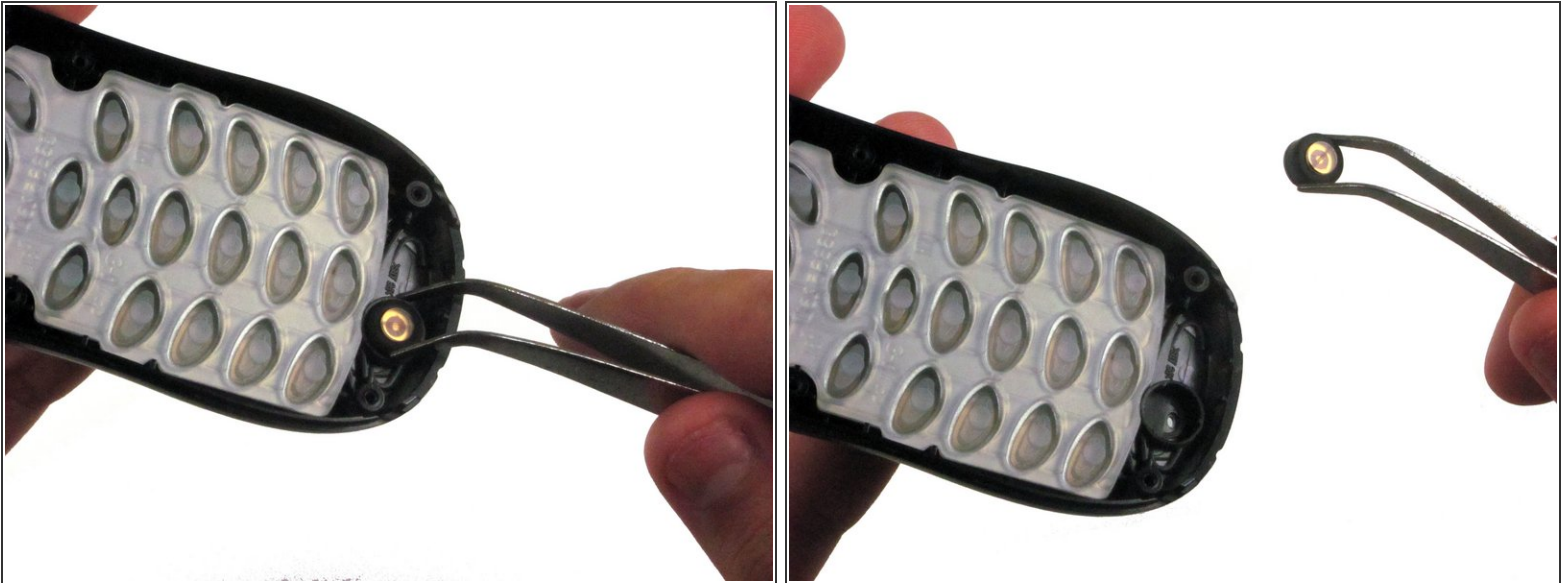

- Use tweezers or fingers to remove the microphone.
- ⓘ Note that the keypad does not need to be removed to get to the microphone.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-18 10:26:10 AM.