




Samsung ATIV Book 9 Plus Charger Port Replacement

This guide will show you how to replace the charging port on a Samsung ATIV Book 9 Plus.

Written By: Casey Kauffman

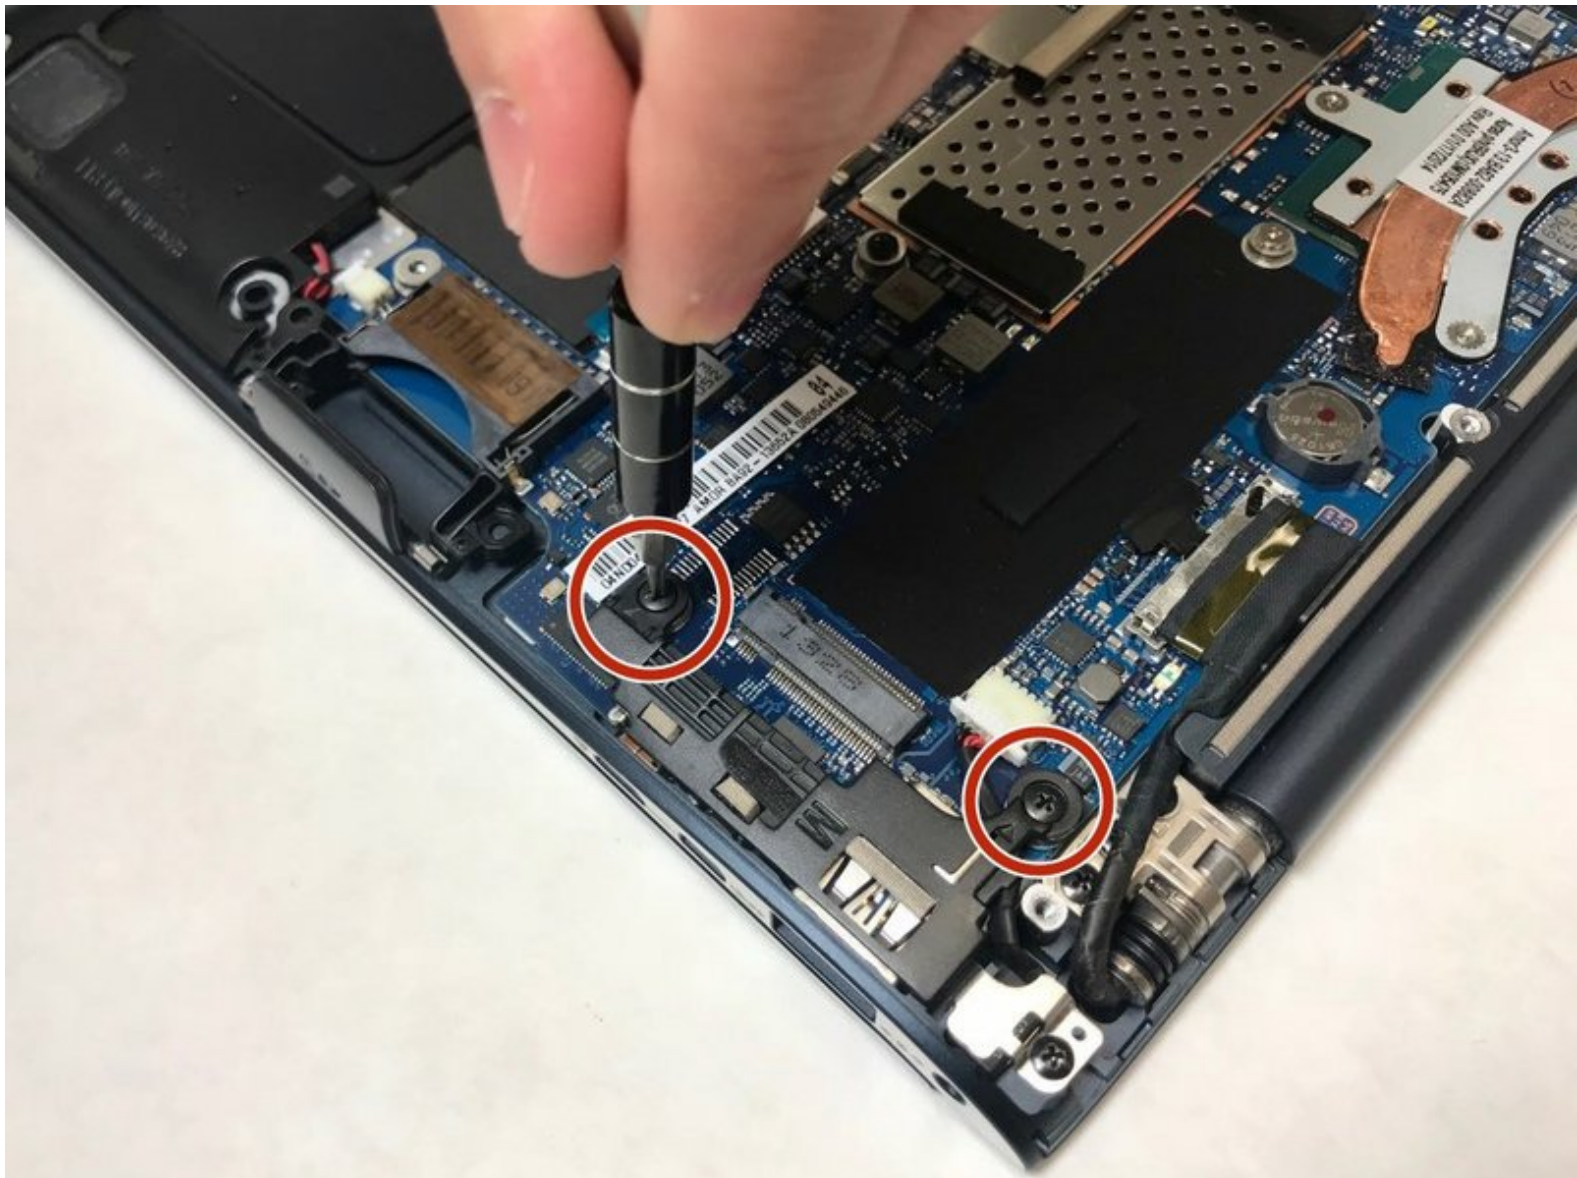


INTRODUCTION

This guide may be used to remove the charger port from the Samsung ATIV Book 9 Plus for replacement. Have a Phillips screw driver handy. Make sure you are able to keep track of all the screws removed and where they belong (a magnetic project mat would be helpful). Replacement charger ports should be purchased from the laptop's original manufacturing company. When removing the port, make sure not to damage any connections that connect the charging port to the laptop.

TOOLS:

- [Phillips #000 Screwdriver](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Back Cover

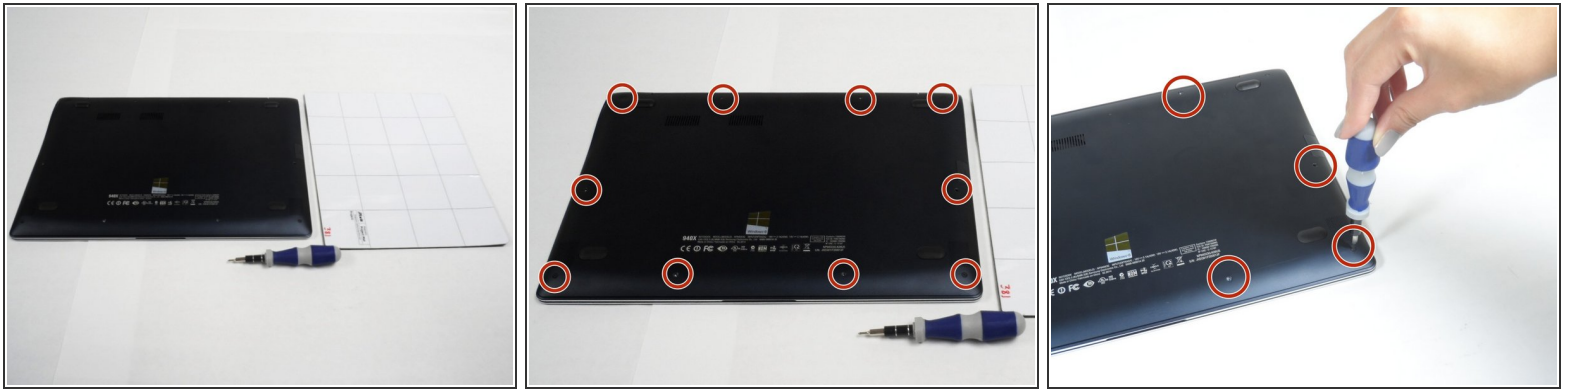



- Turn the laptop upside down so that the underside of the laptop is facing you.
- Use a Phillips #000 screwdriver to unscrew the 4.3 mm screws located on the edges and corners of the laptop.

Step 2




- Lift the cover to reveal the interior of the laptop.

Step 3 — Charger Port

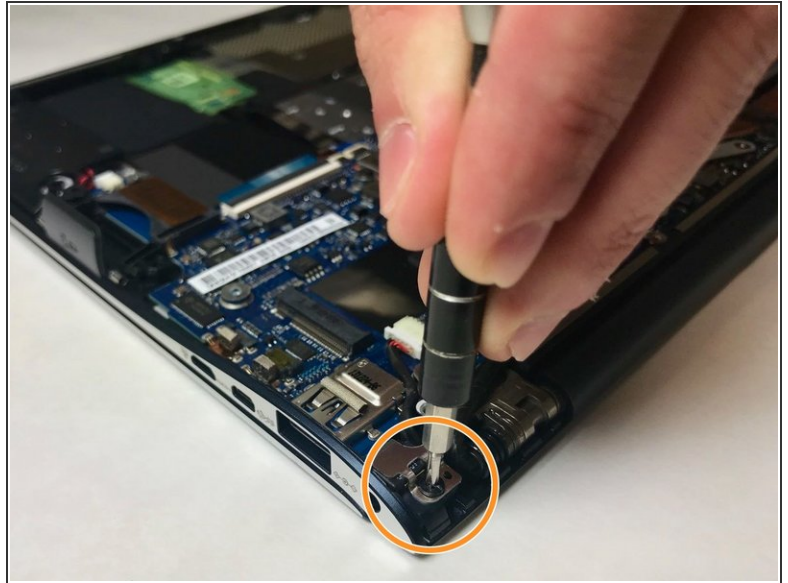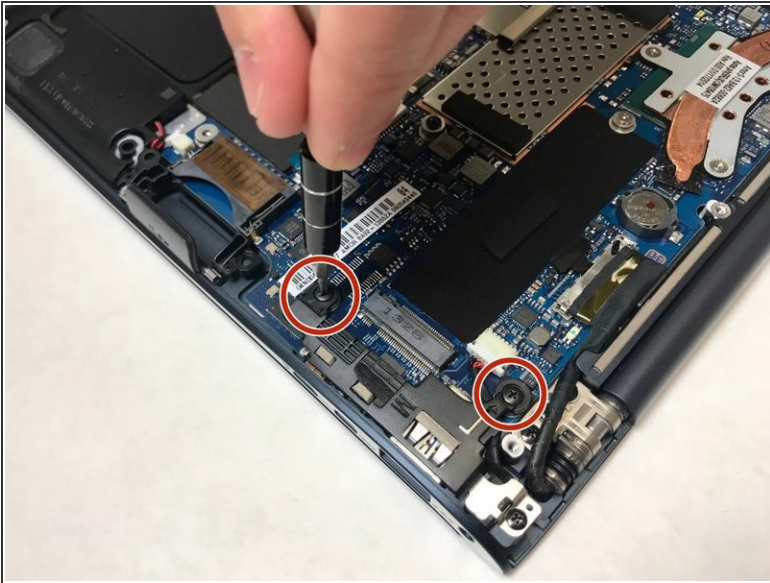


- Unscrew the 4.3mm screws holding down the plastic cover using a #000 screwdriver. After the screws are out remove the cover.
- Remove the 4.3 mm screw holding down the metal cover using a #000 screwdriver.

Step 4

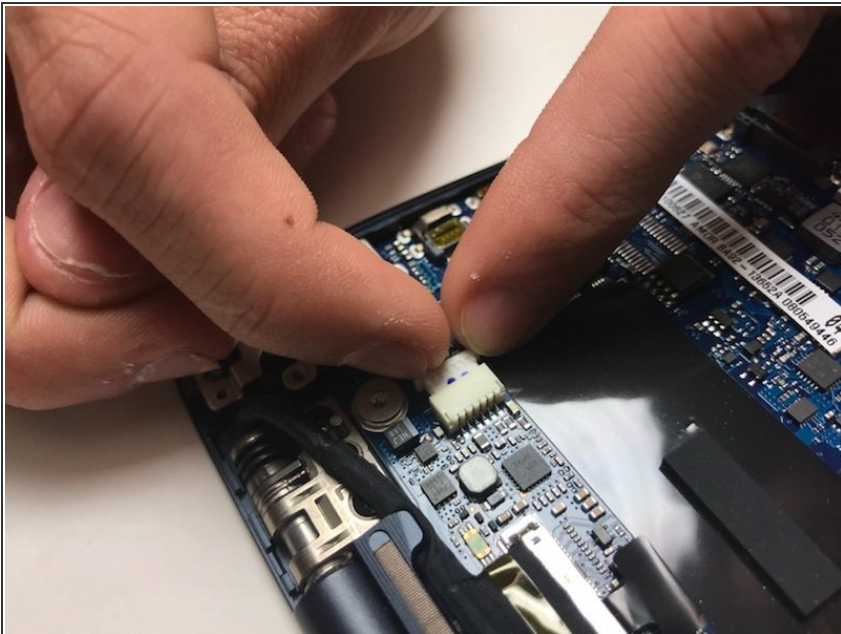


- Disconnect the charging port from the motherboard by gently tugging on the plastic part of the connection.

Step 5

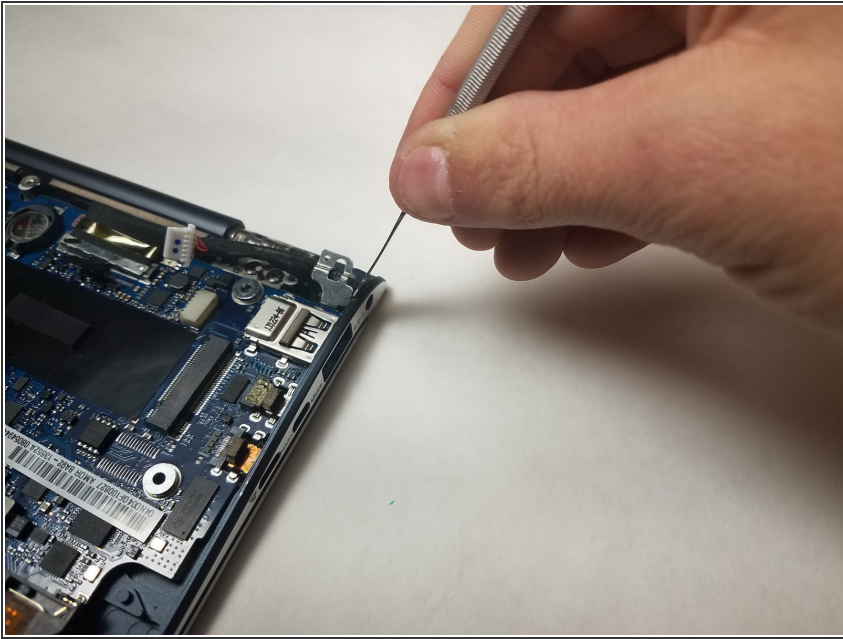

- Wedge a plastic opening tool or spudger in between the laptop casing and the port. Pry until you feel it release.
- ⓘ This will take some force because the port is glued to the casing.

Step 6

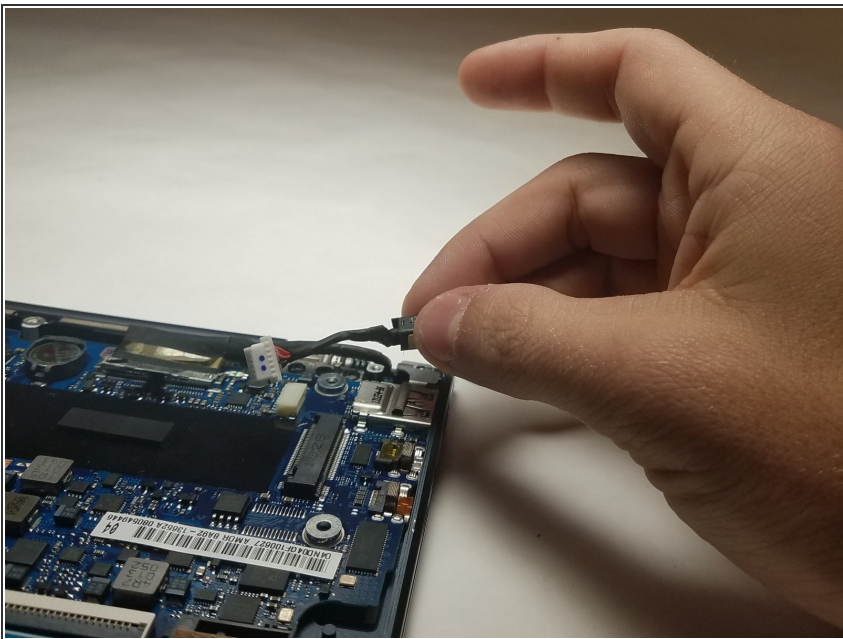

- Remove the disconnected charger port.

To reassemble your device, follow these instructions in reverse order.