




Dell Vostro A90 Memory Module Replacement

Written By: Johnathan Hammond

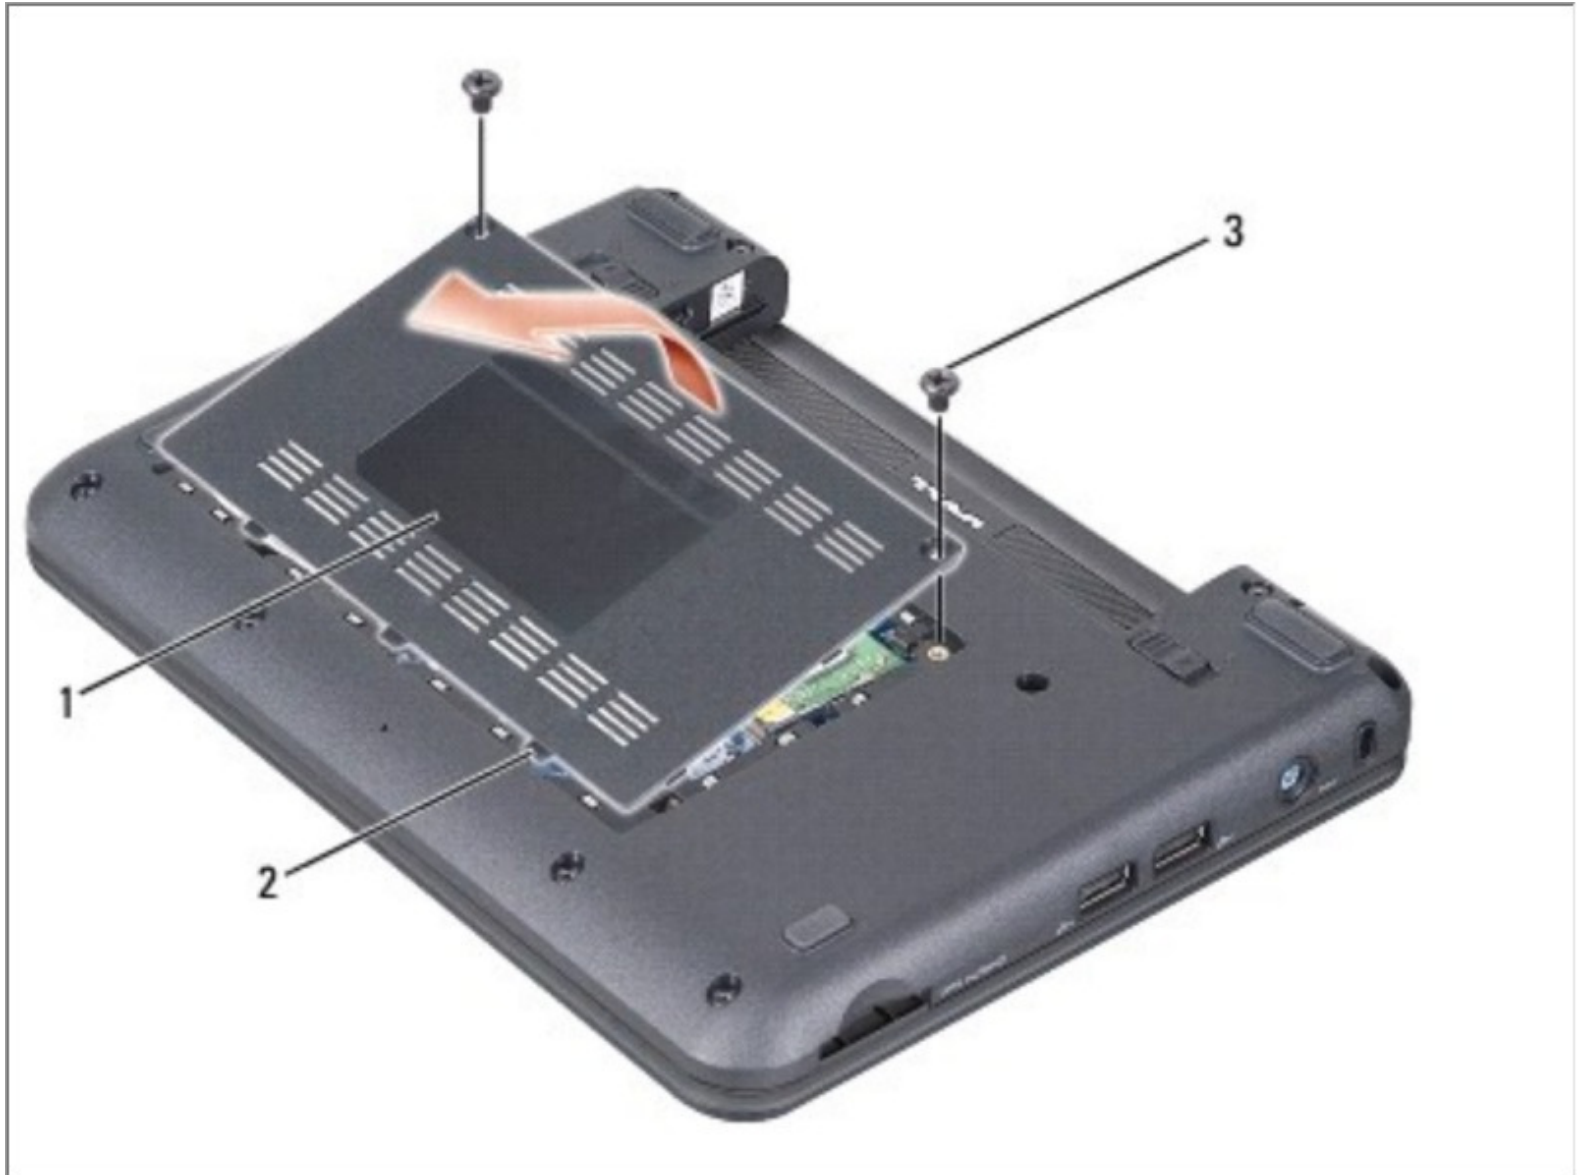

INTRODUCTION

In this guide, we will show you how to remove and replace the Memory Module.

TOOLS:


- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Removing the Battery




- Turn the computer over.
- Slide the battery-bay release latch and the battery-lock latch towards the outer edges.
 - Slide the battery out of the battery bay.
- Turn the computer top-side up, open the display, and press the power button to ground the system board.
- ☑ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

Step 2 — Remove the Screws

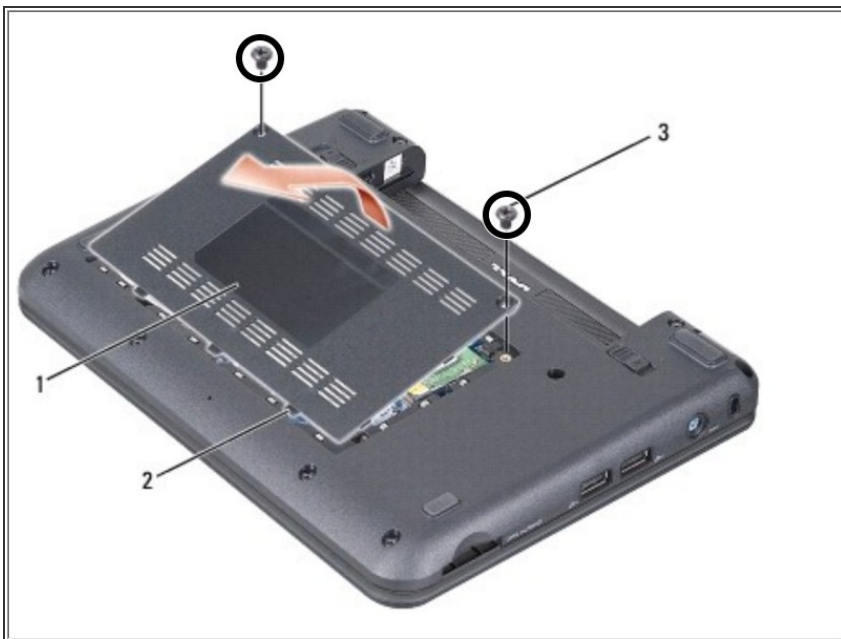

- Remove the two screws on the module cover.

Step 3 — Lifting the Cover

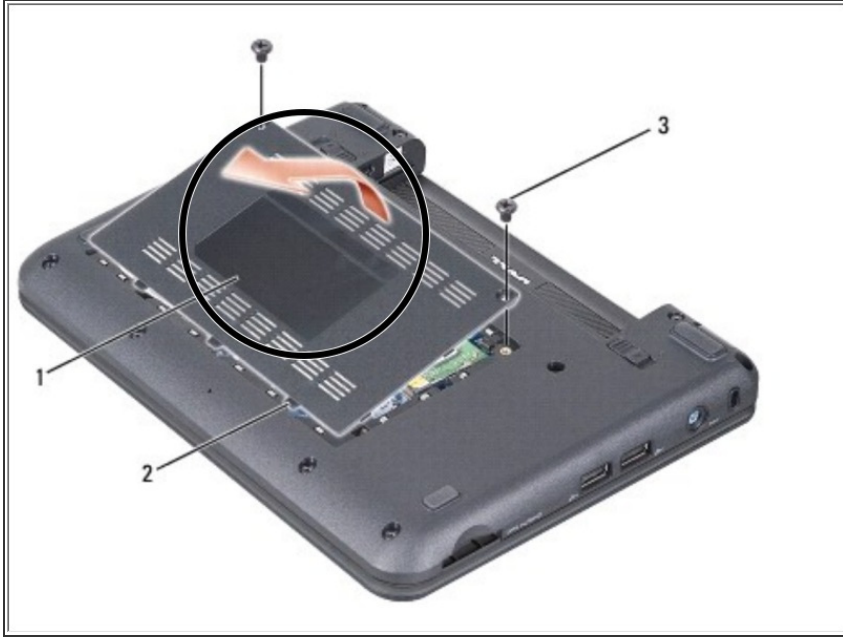

- Lift the cover off the computer at an angle as shown in the figure.
- ☑ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

This document was last generated on 2018-06-23 03:20:48 AM.