




# Dell Vostro A90 Solid-State Drive Removal

Written By: Johnathan Hammond

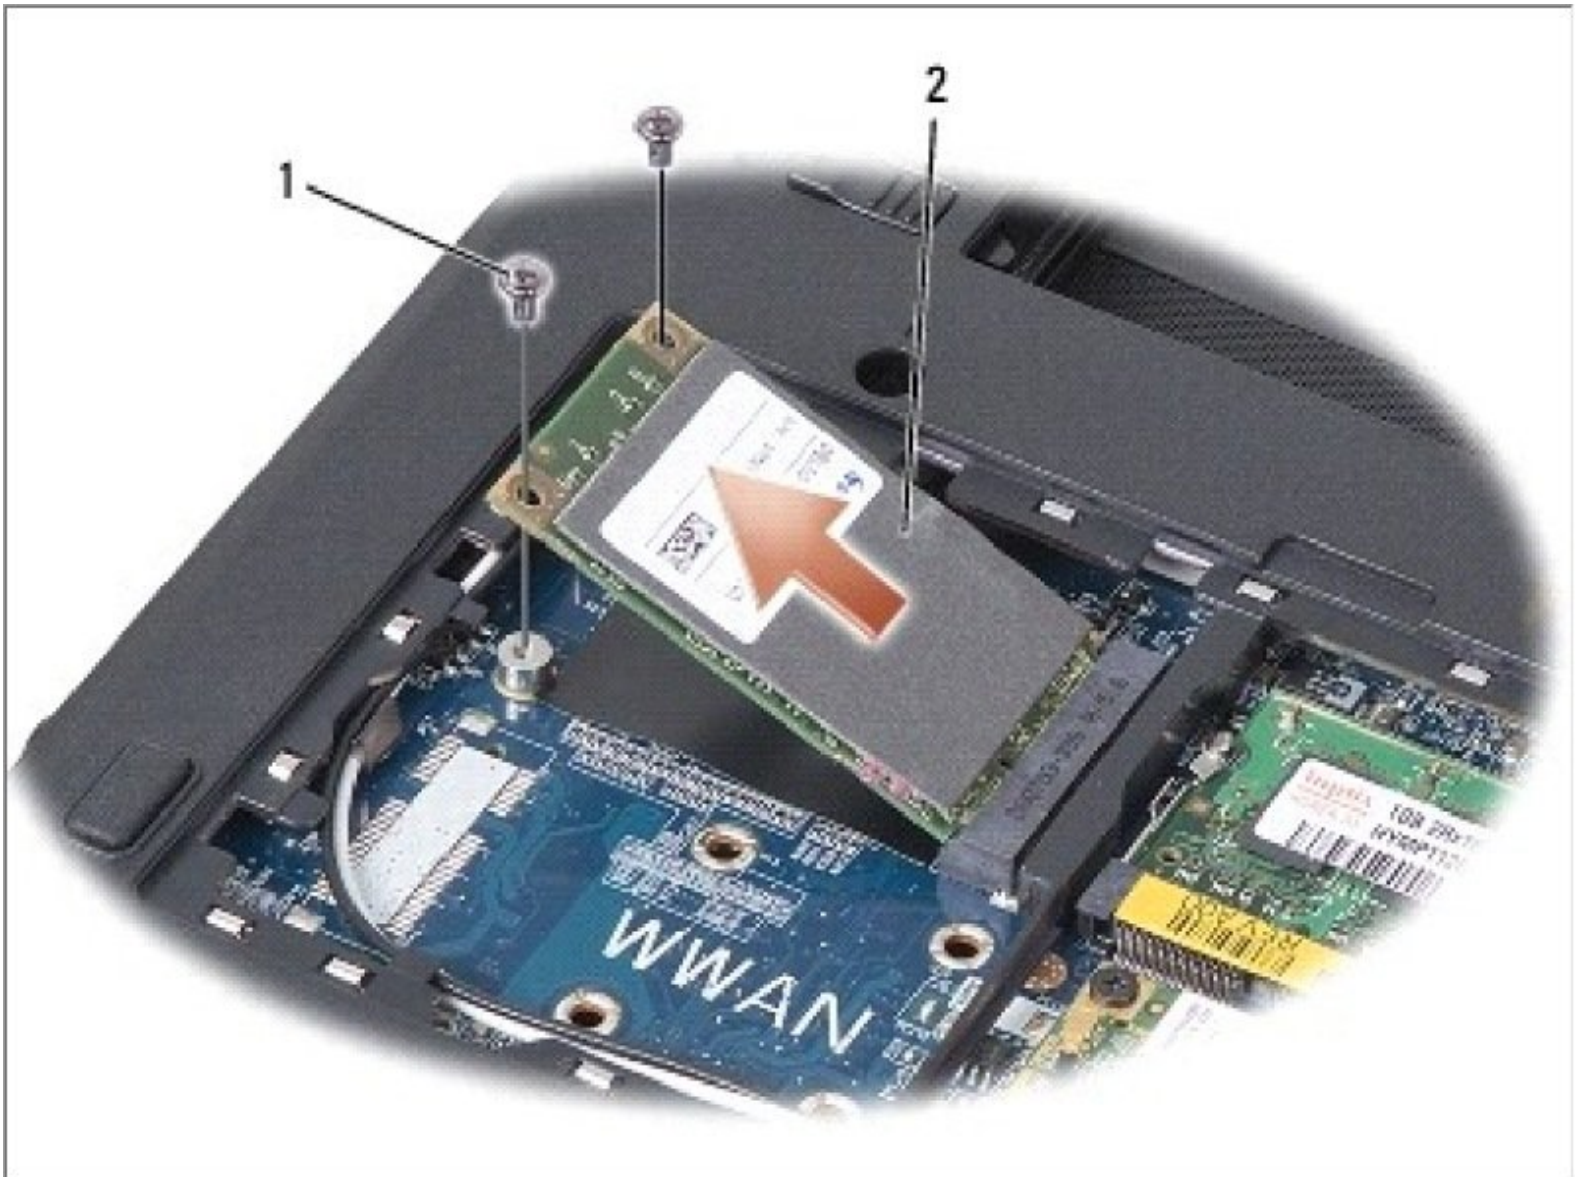

---

## INTRODUCTION

In this guide, we will be showing you how to remove the Solid-State Drive.


---



### TOOLS:


- [Phillips #0 Screwdriver](#) (1)
-

## Step 1 — Removing the Battery

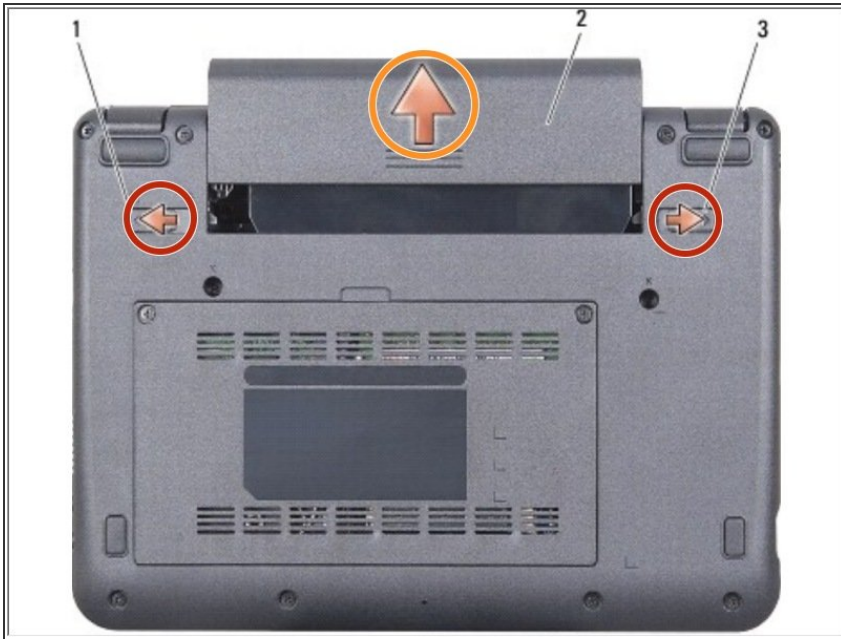


- Turn the computer over.
  - Slide the battery-bay release latch and the battery-lock latch towards the outer edges.
    - Slide the battery out of the battery bay.
- Turn the computer top-side up, open the display, and press the power button to ground the system board.
- ☑ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

## Step 2 — Remove the Screws

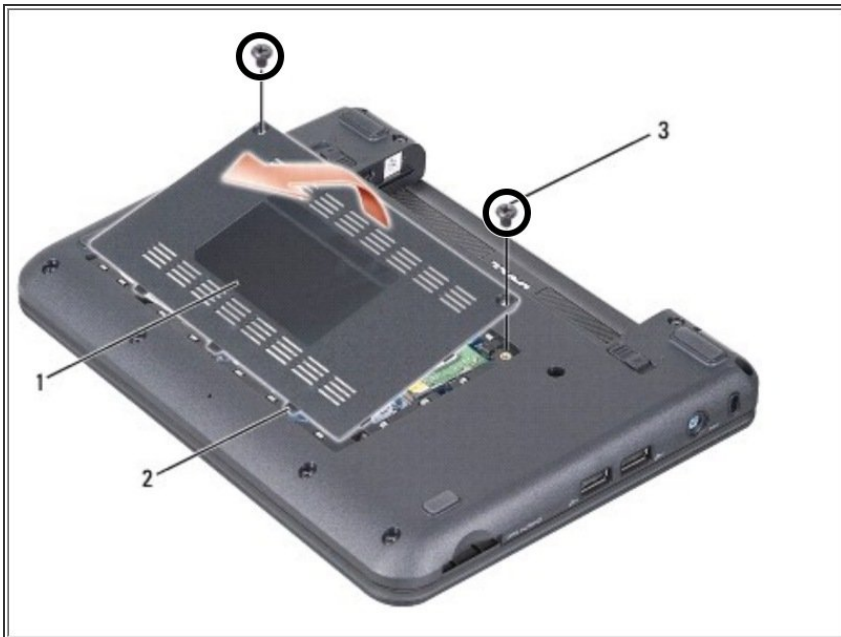


- Remove the two screws on the module cover.

### Step 3 — Lifting the Cover

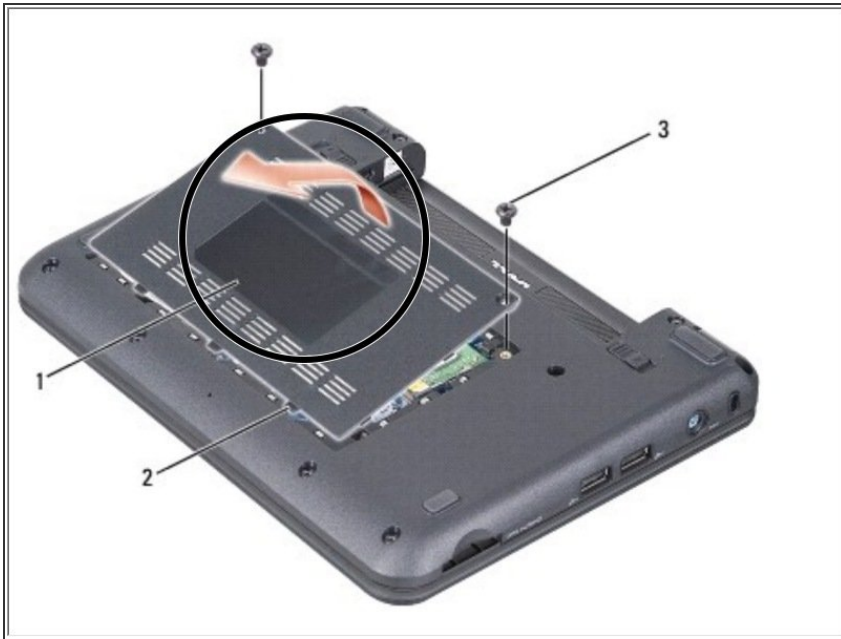

- Lift the cover off the computer at an angle as shown in the figure.
- ☑ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

### Step 4 — Remove Solid-State Drive

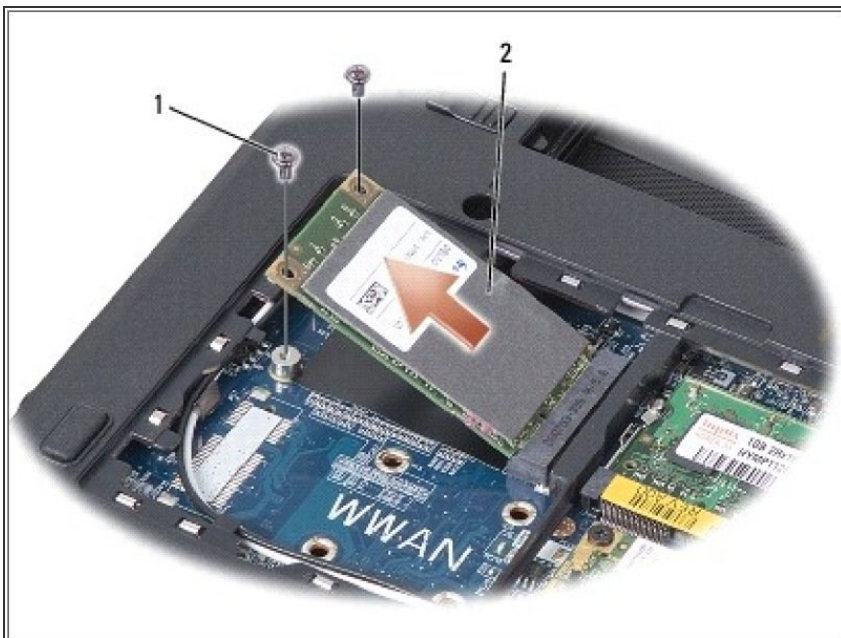

- Remove the two screws that secure the solid-state drive.
- Lift the solid-state drive out of its system board connector.
- ☑ If this is all you are doing Follow Step In Reverse if not Go to Next Step.