




Dell Vostro 500 Memory Module Replacement

Written By: Johnathan Hammond

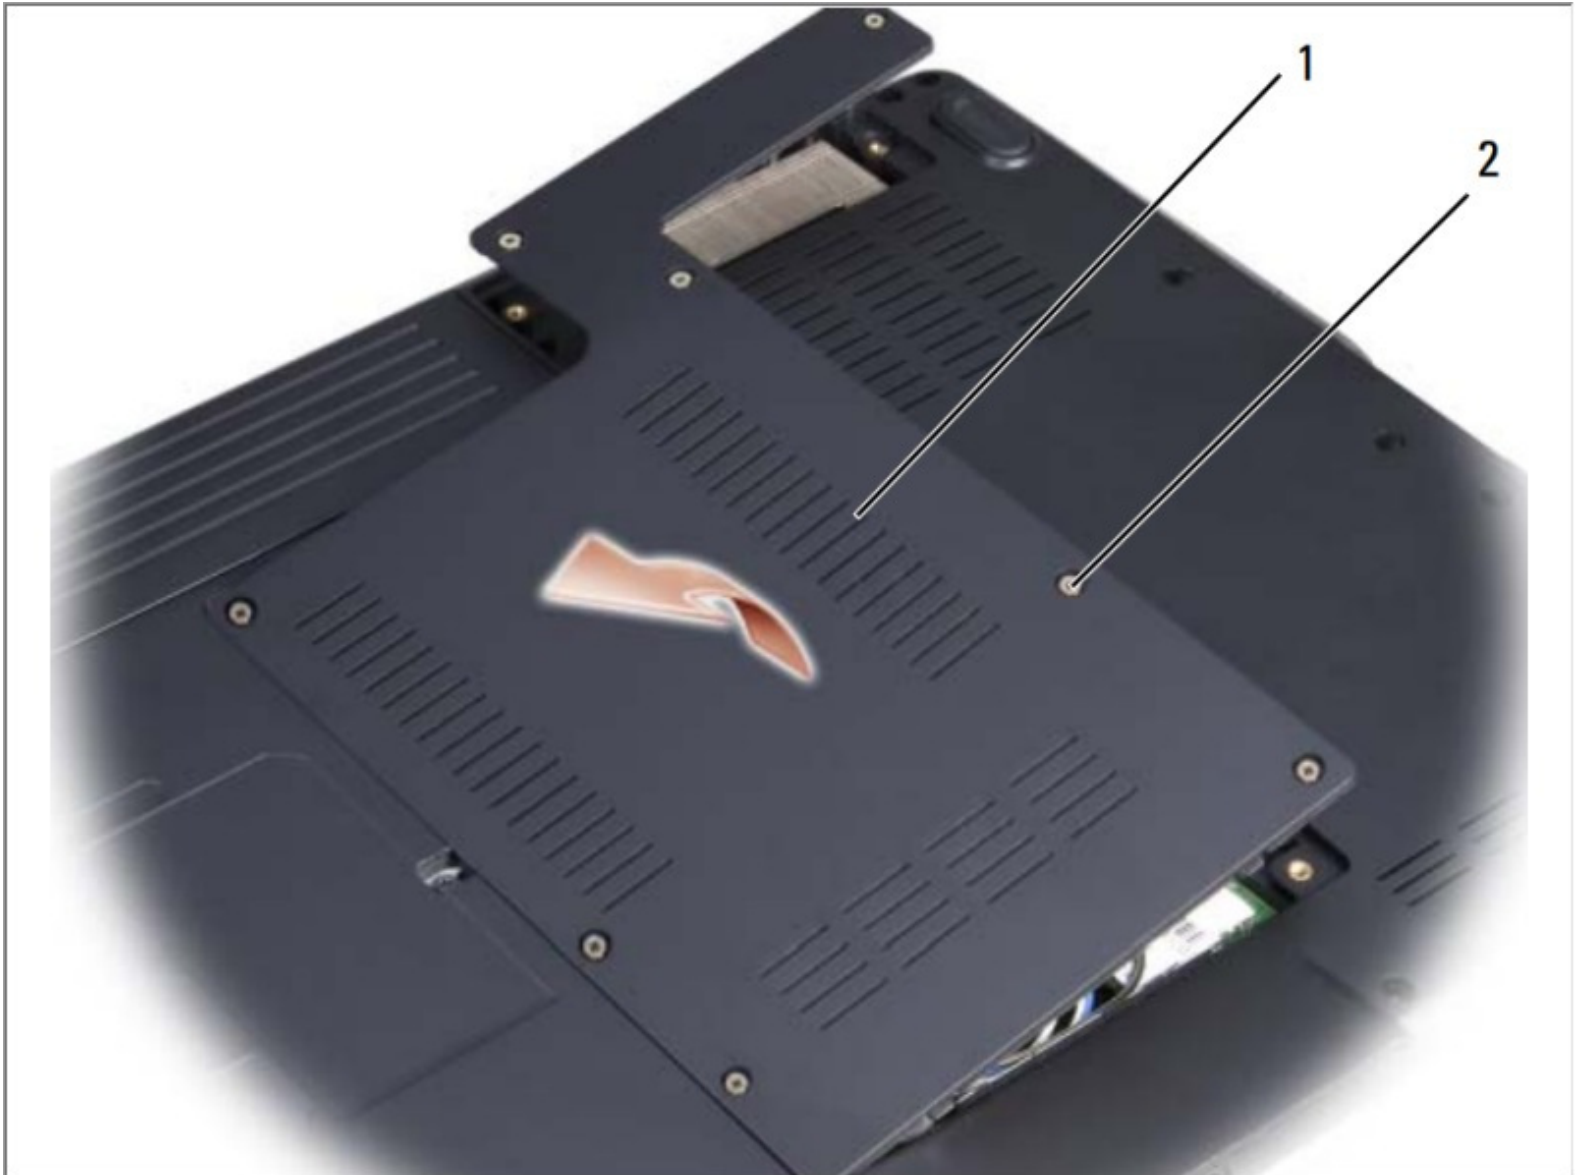


INTRODUCTION

In this guide, will be showing you how to remove and replace the Memory Module.

TOOLS:


- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Removing the Battery

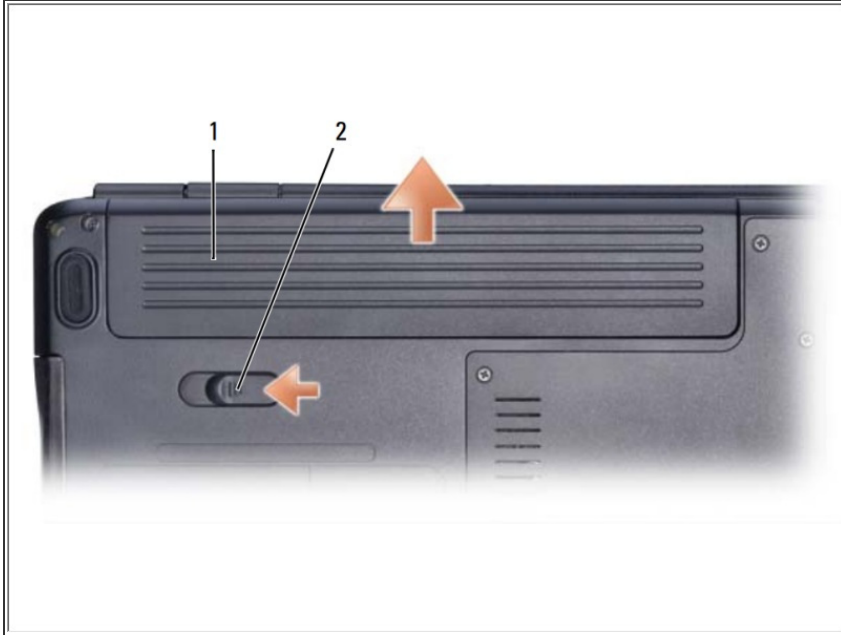


- Slide the battery release latch toward the side of the computer until it is engaged.
 - Slide the battery out of the bay.
- ★ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

Step 2 — Removing the Cover

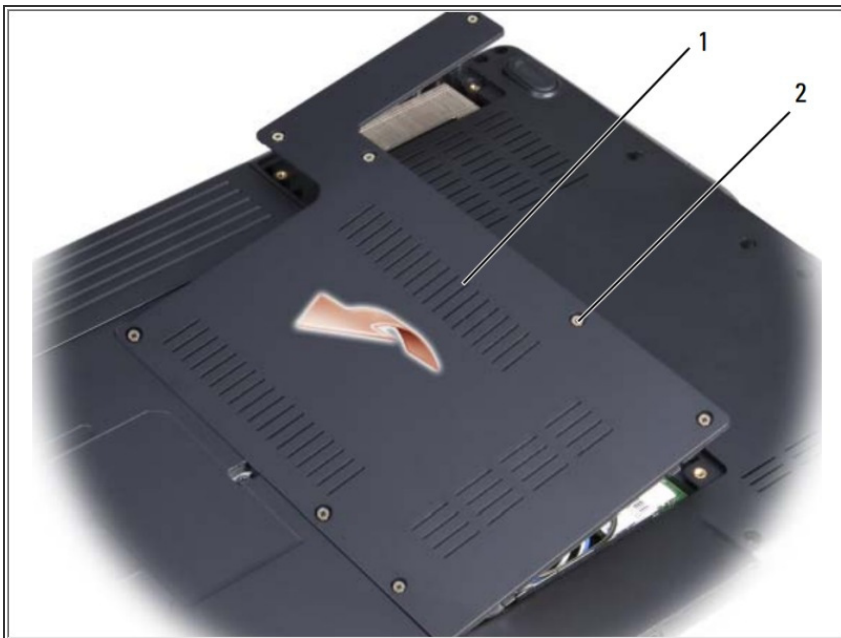

- Turn the computer upside-down, loosen the eight captive screws on the cover and remove the cover.

Step 3 — Popping up the Memory Module

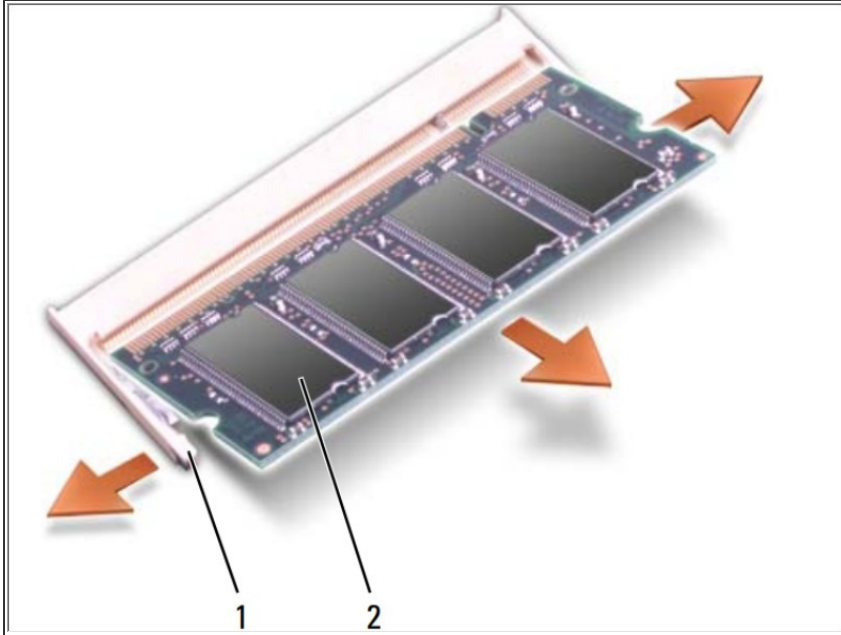

- ⓘ NOTICE: To prevent damage to the memory module connector, do not use tools to spread the memory module securing clips.
- ⓘ NOTICE: To avoid electrostatic discharge, ground yourself by using a wrist grounding strap or by periodically touching an unpainted metal surface (such as a connector on the back of the computer).
- Use your fingertips to carefully spread apart the securing clips on each end of the memory module connector until the module pops up.
 - Remove the module from the connector.
- ★ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

This document was last generated on 2018-06-14 09:40:33 PM.