




# Dell Vostro 3750 Hard Drive Replacement

Written By: Johnathan Hammond

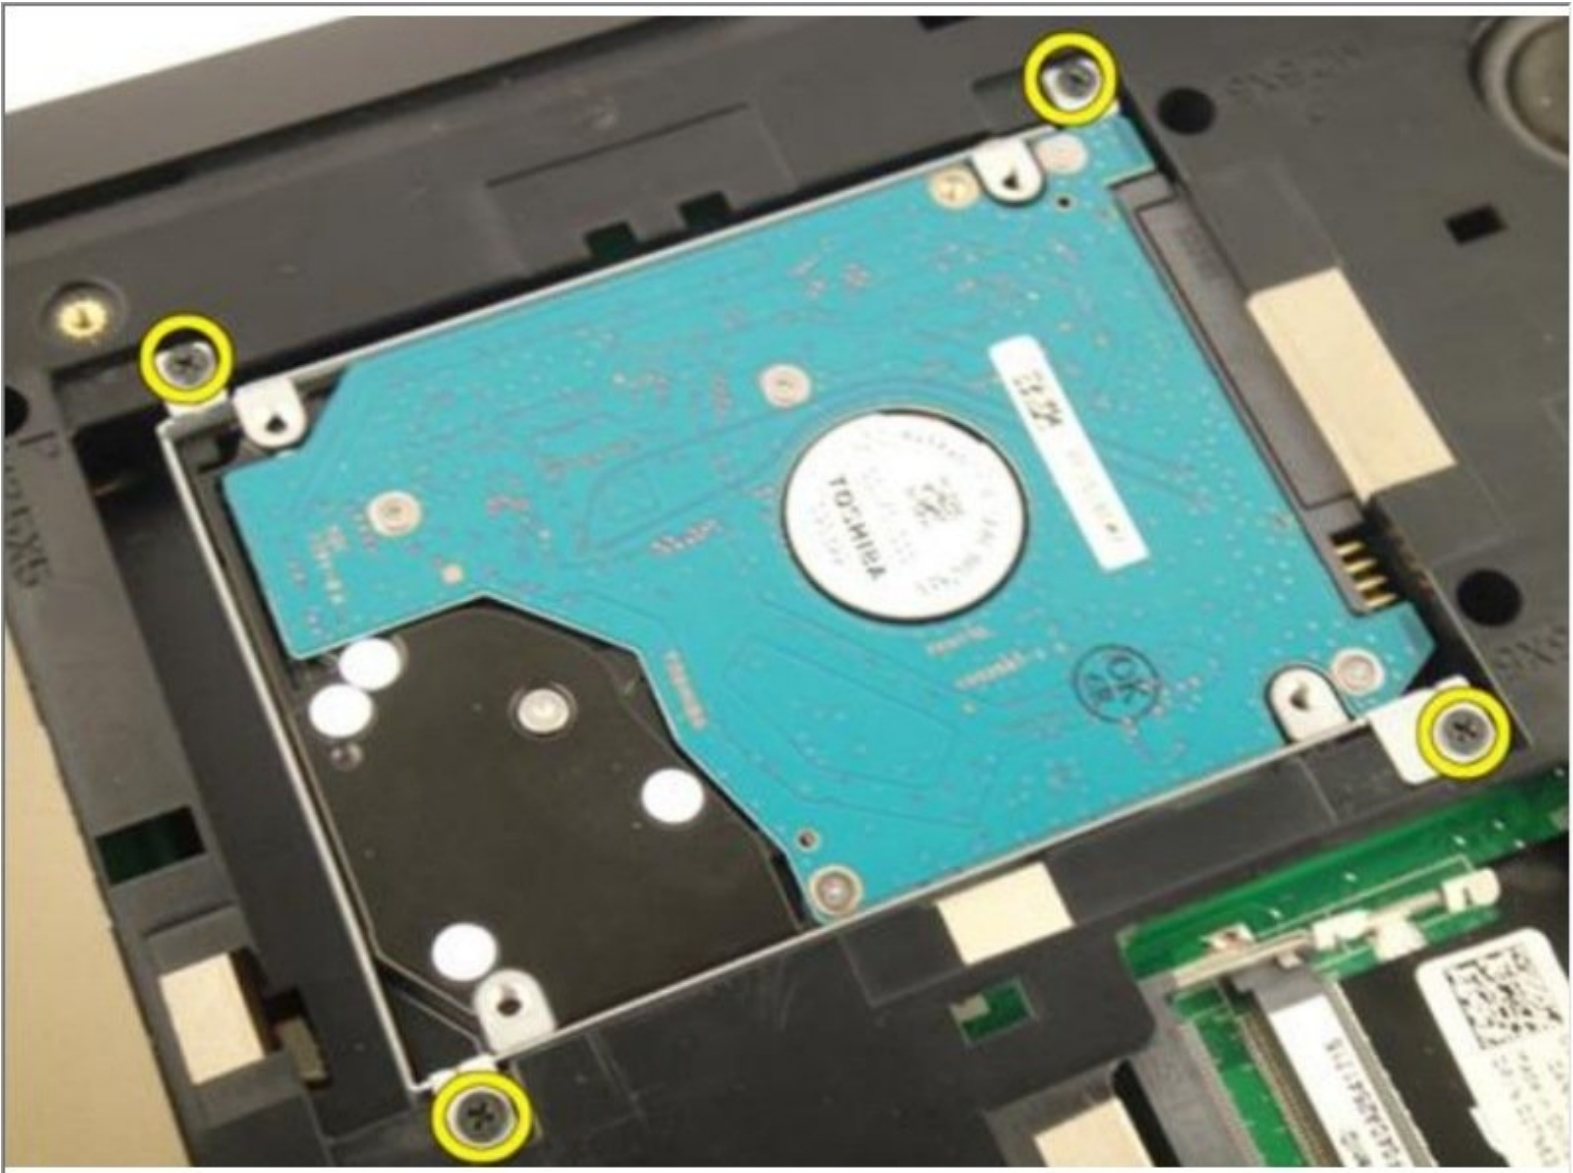

---

## INTRODUCTION

In this guide, we will be showing you how to remove and replace the Hard Drive.

---

### TOOLS:


- [Phillips #0 Screwdriver](#) (1)
-

## Step 1 — Unlocking the Battery



- Slide the release latches to unlock the battery.

## Step 2 — Removing the Battery

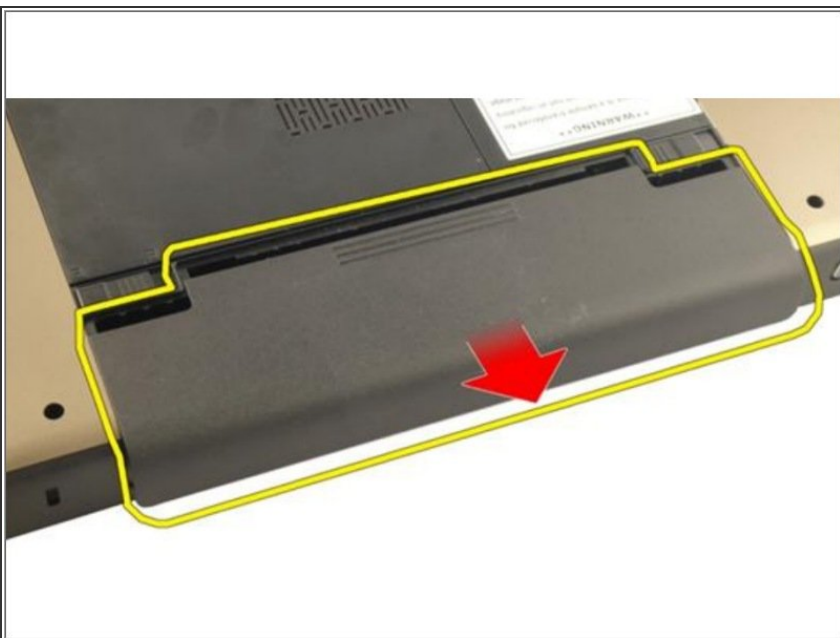


- Slide the battery out of the chassis and remove it from the computer.
- ☑ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

### Step 3 — Loosen the Screws



- Loosen the screws that secure the memory door.


### Step 4 — Removing the Memory Door

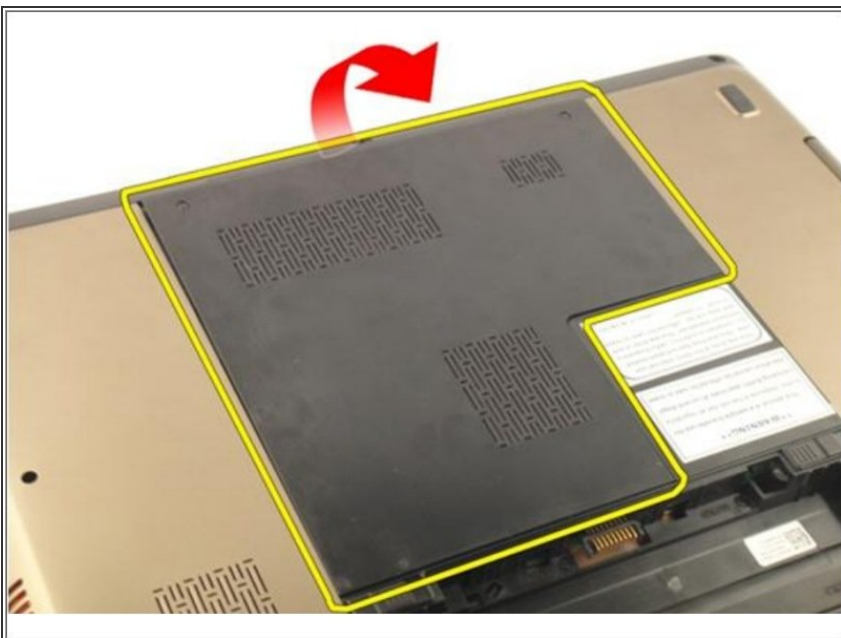

- Pry up the memory door near the screw hole, lift, and remove it
- If this is all you are doing Follow Step In Reverse if not Go to Next Step.




## Step 5 — Remove the Screws

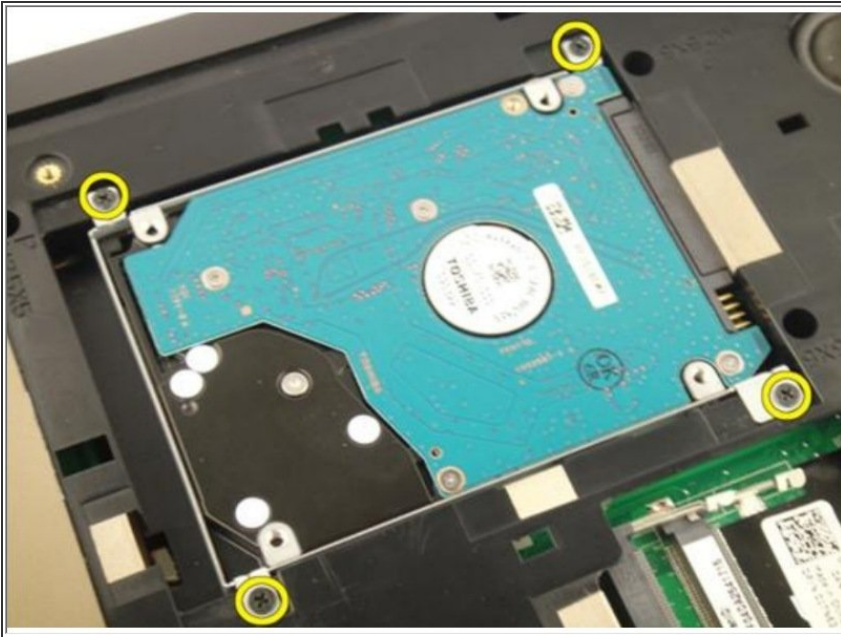


- Remove the screws that secure the hard-drive bracket.

## Step 6 — Sliding the Module

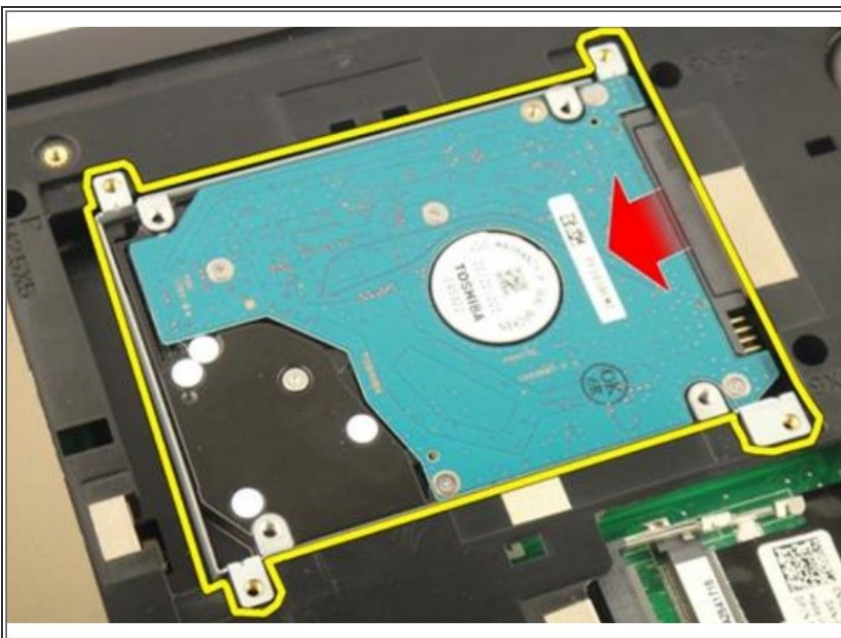


- Slide the hard drive module in the direction shown in the image below.

## Step 7 — Remove the Hard Drive Module

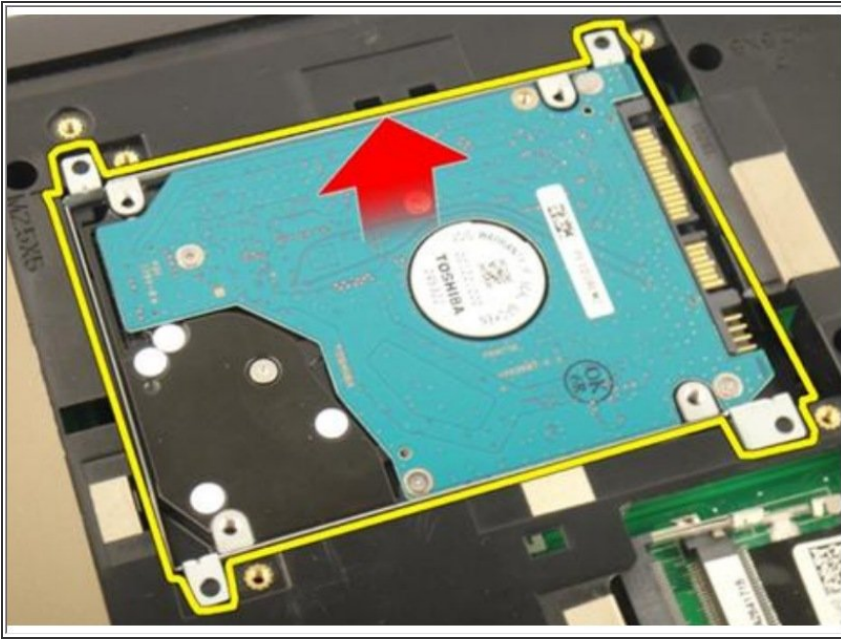


- Remove the hard drive module from the system board.

## Step 8 — Remove the Screws

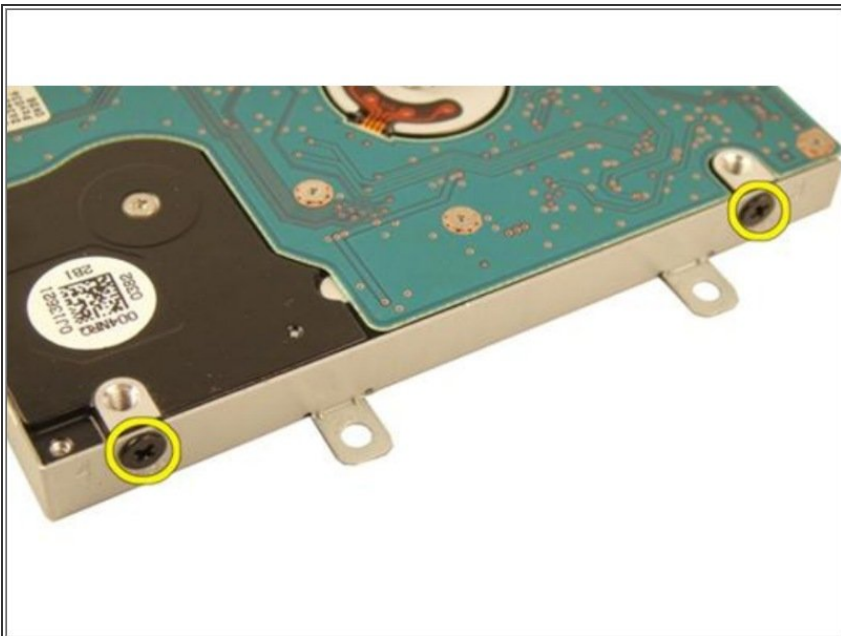

- Remove the screws that secure the hard-drive bracket.

## Step 9 — Sliding the Hard Drive

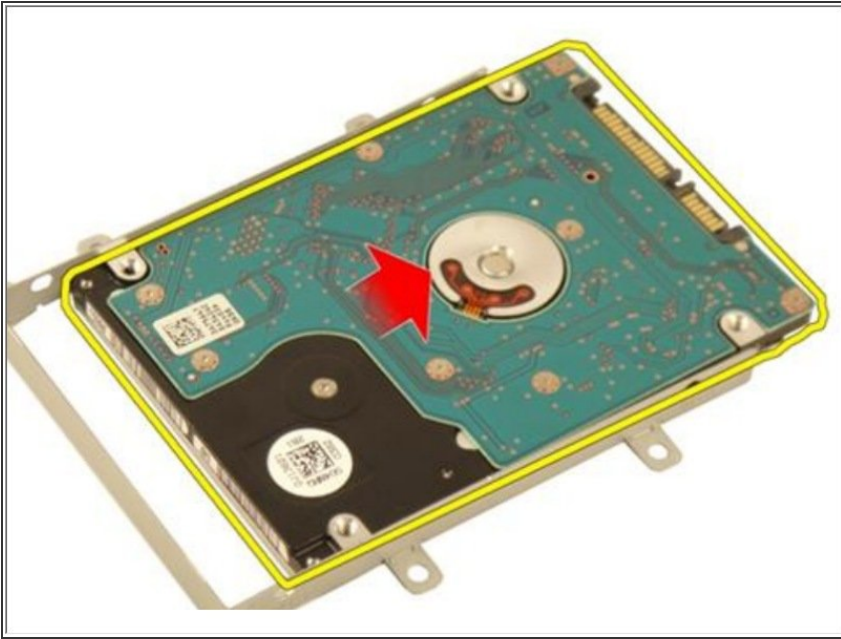

- Slide the hard drive from the hard-drive bracket.
- ☑ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

This document was last generated on 2019-07-16 11:11:56 AM.