




Dell Vostro 3450 Memory Module Replacement

Written By: Johnathan Hammond

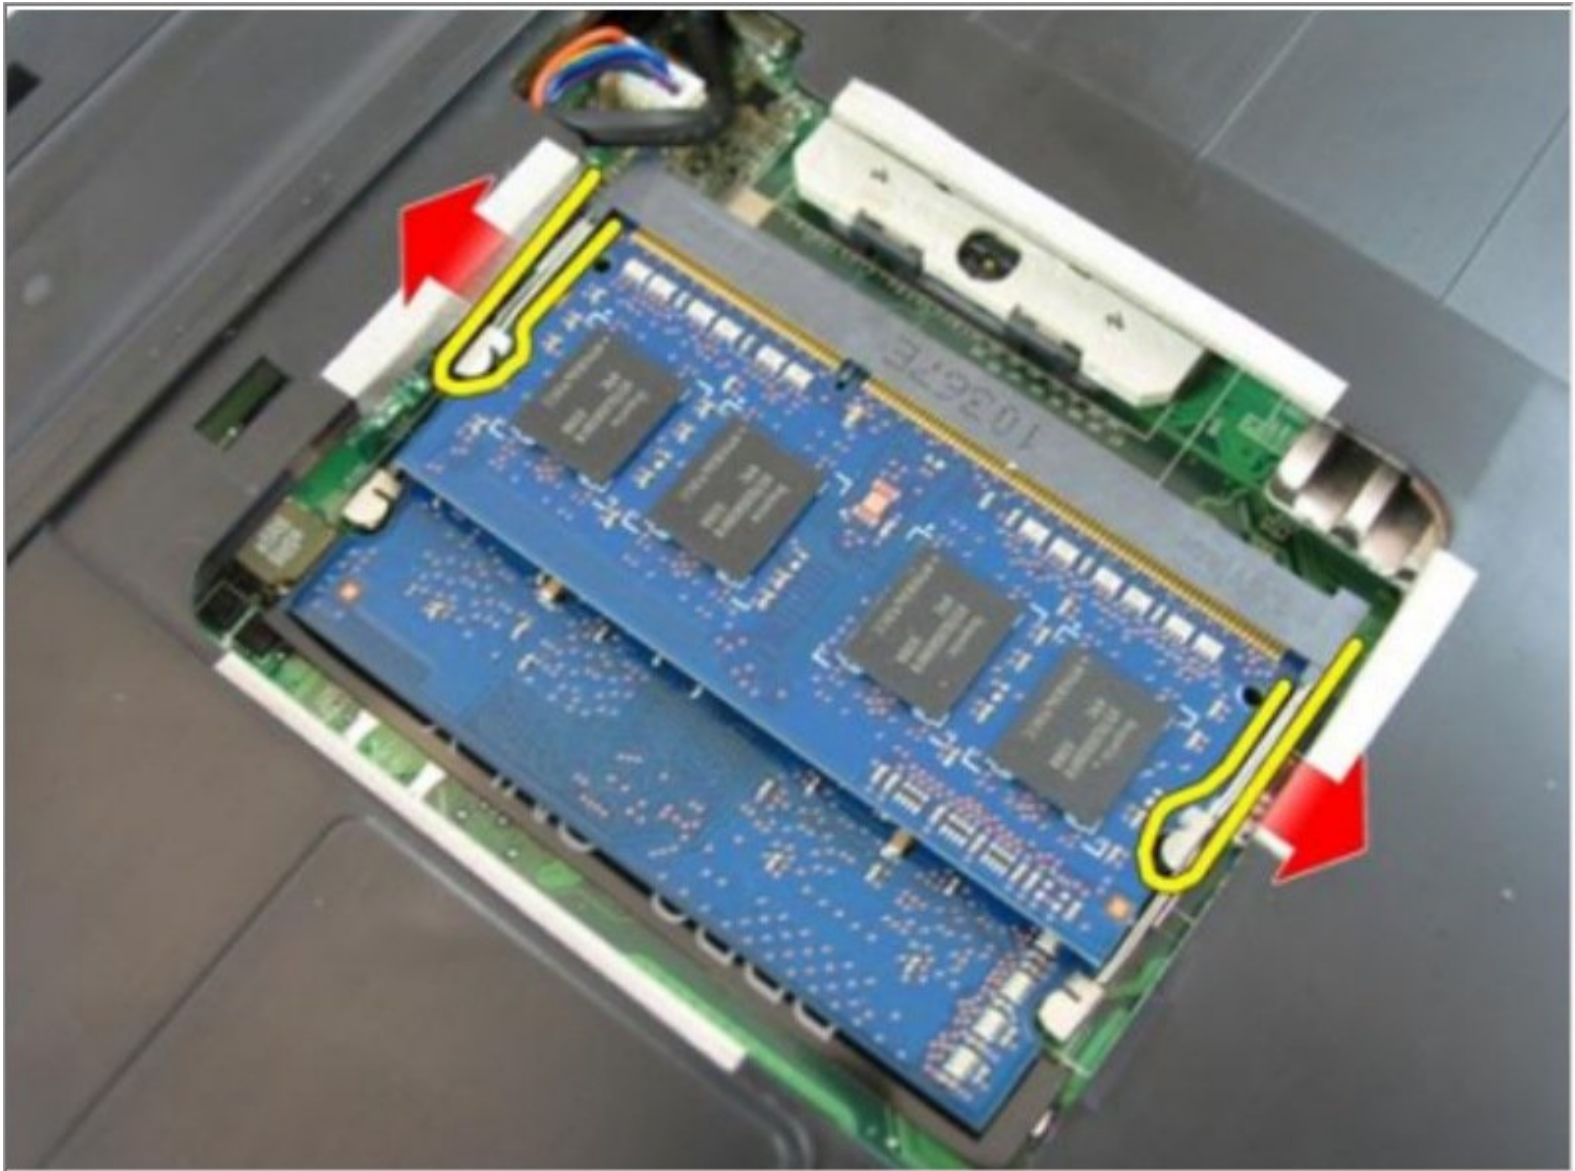

INTRODUCTION

In this guide, we will show you how to remove and replace the Memory Module.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Unlocking the Battery



- Slide the left and the right battery release latches to the unlock position.

Step 2 — Removing the Battery




- Slide the battery and remove it from the computer.

Step 3 — Loosen the Screw




- Loosen the screw that secures the memory door.

Step 4 — Removing the Memory Door

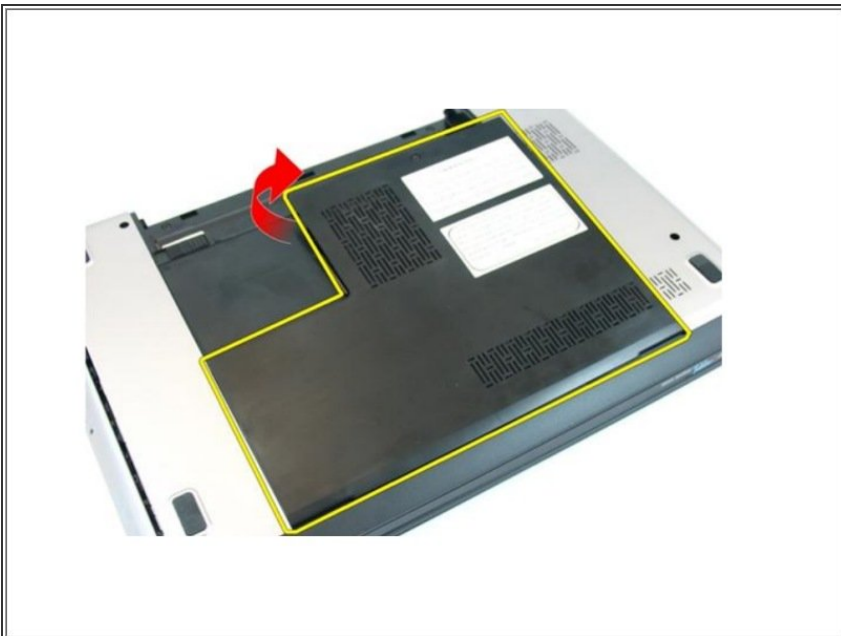


- Pry up the memory door near the screw hole, lift and remove it.
- ☑ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

Step 5 — Popping up the Memory Module

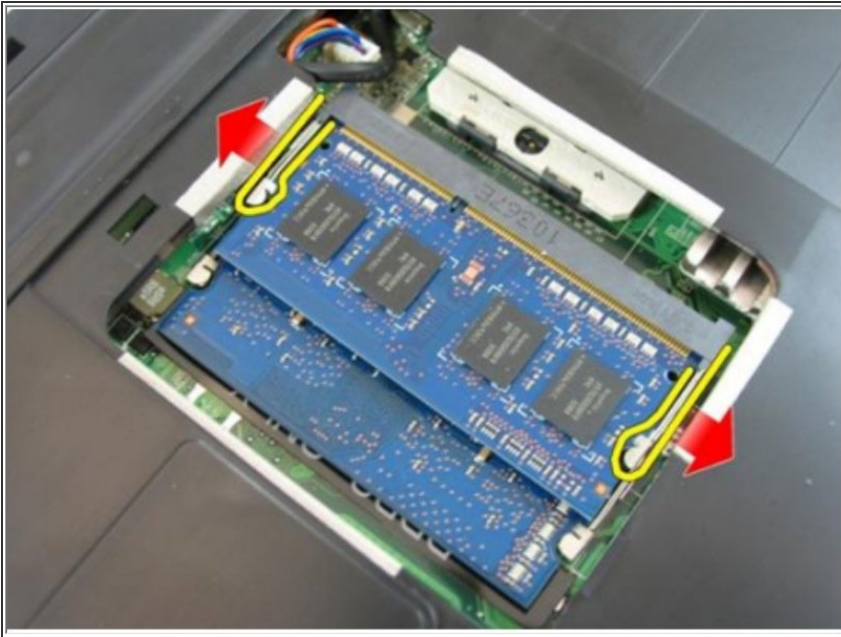

- Pry the retention clips away from the memory module until it pops up.

Step 6 — Remove the Memory Module

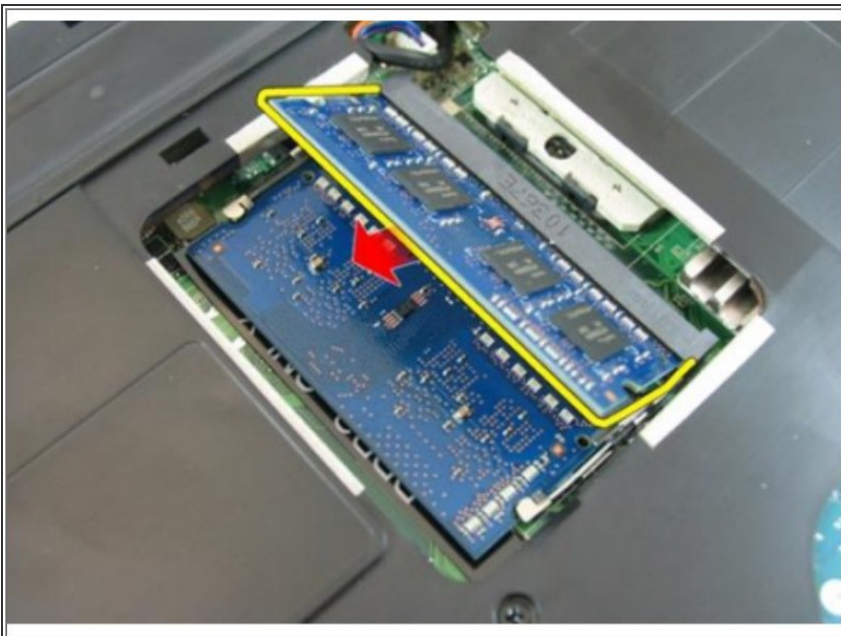

- Remove the memory module from its connector on the system board.

This document was last generated on 2019-08-23 06:19:17 AM.