




Dell Vostro 3350 Memory Module Replacement

Written By: Johnathan Hammond

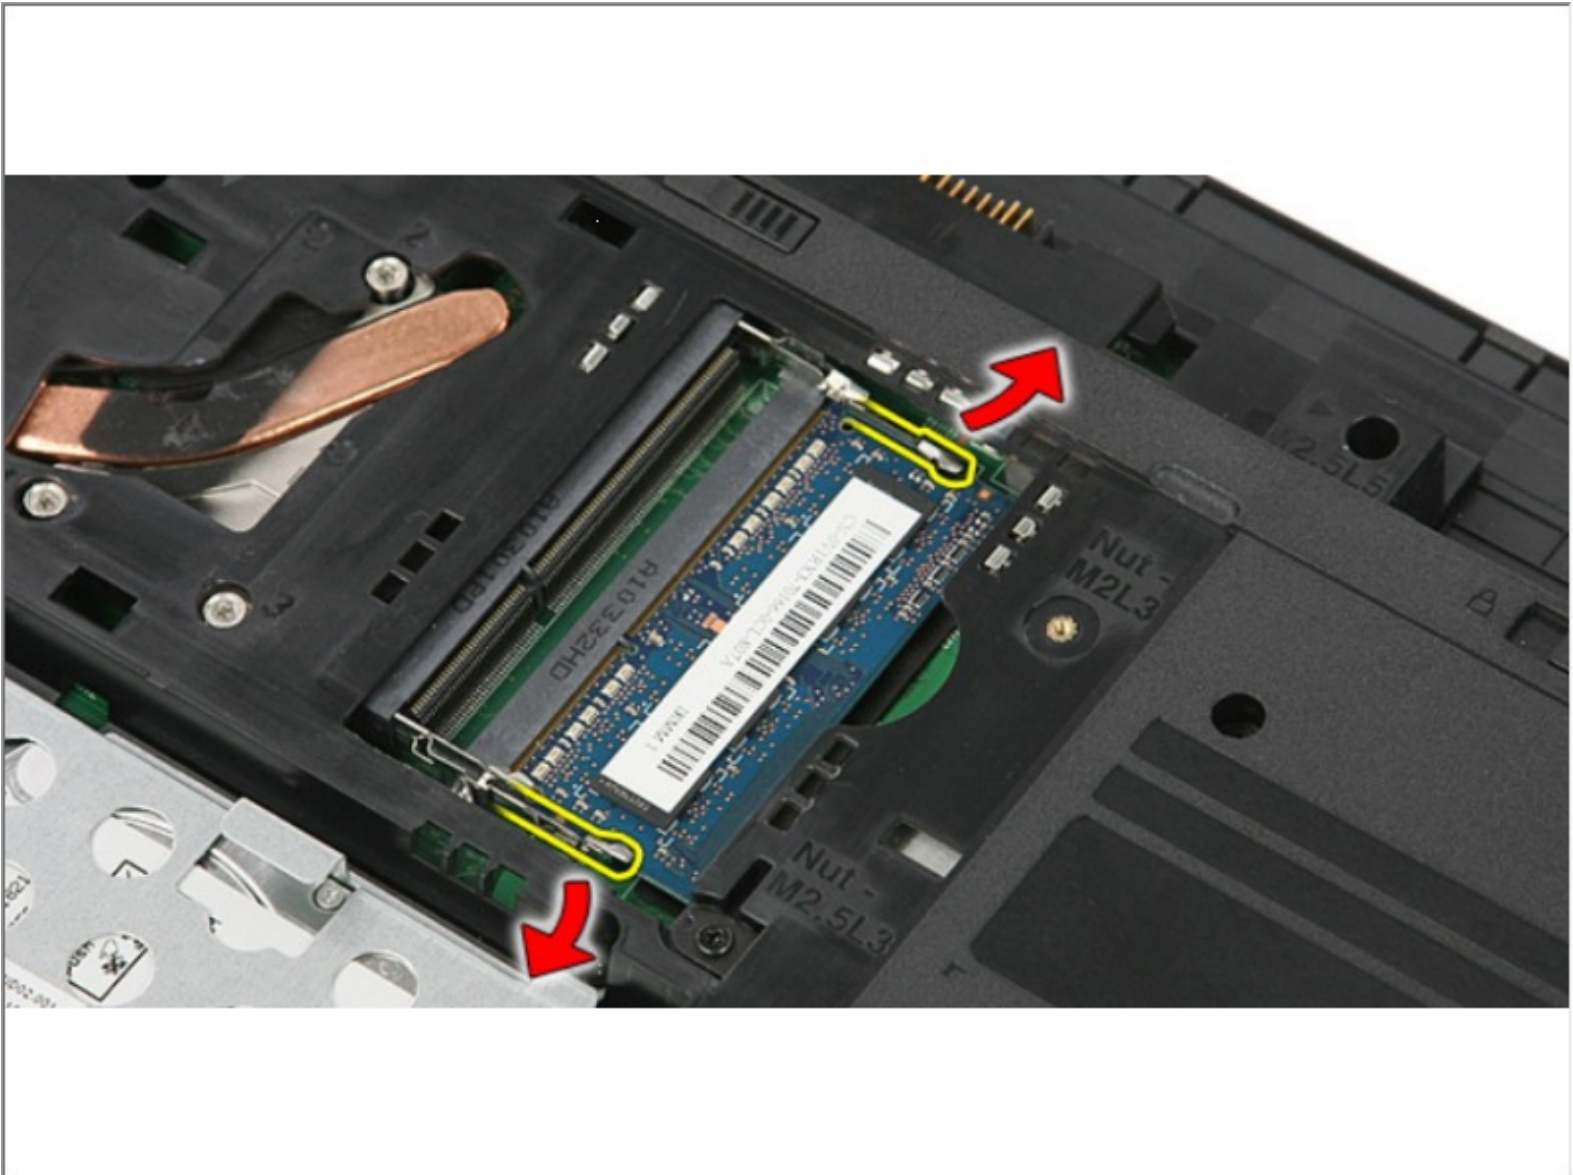


INTRODUCTION

In this guide, we will show you how to remove and replace the Memory Module.

TOOLS:


- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Unlocking the Battery

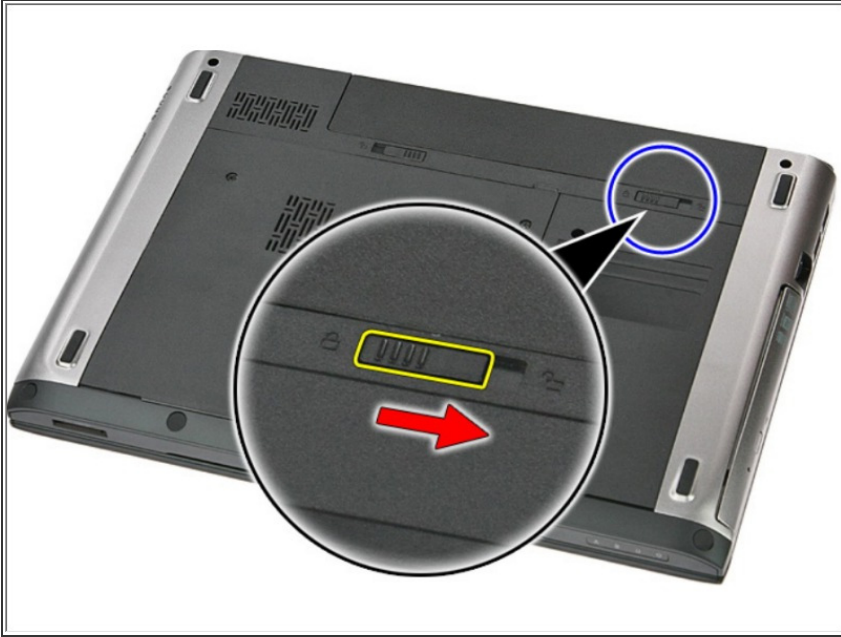

- Slide the release latches to unlock the battery.

Step 2 — Removing the Battery

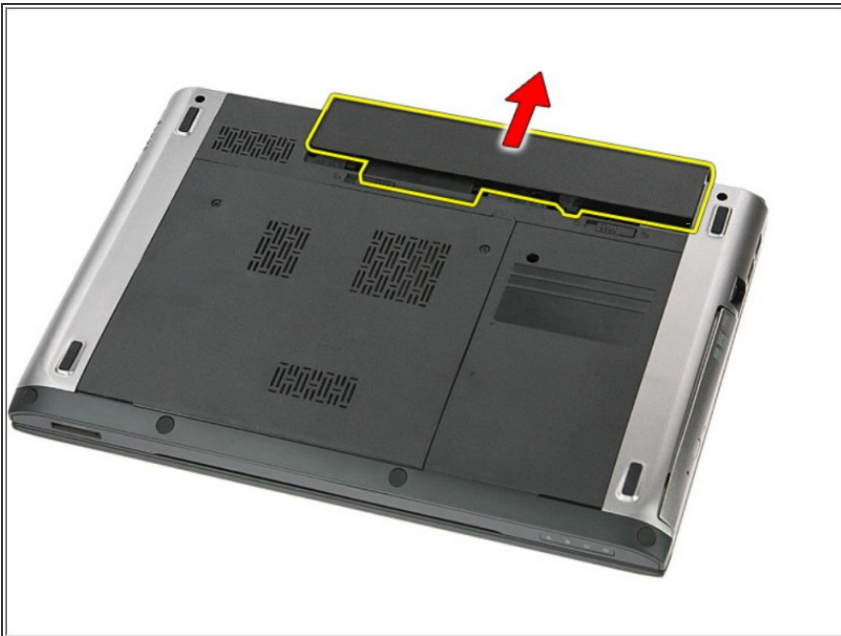


- Slide the battery and remove it from the computer.

Step 3 — Remove the Screws




- Remove the screws that secures the access panel to the base of the computer.

Step 4 — Lifting the Access Panel

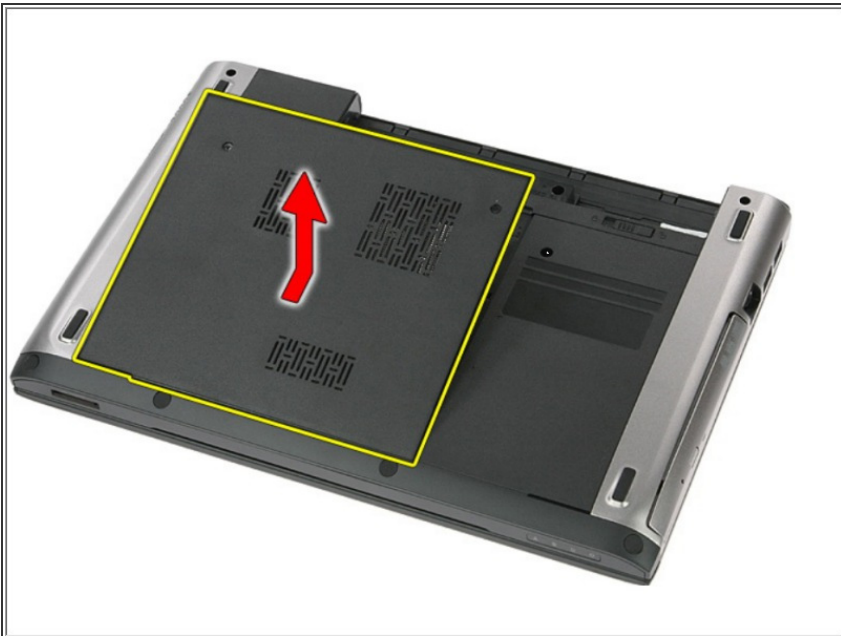


- Lift the access panel up at an angle and remove it from the computer.

Step 5 — Prying the Clips

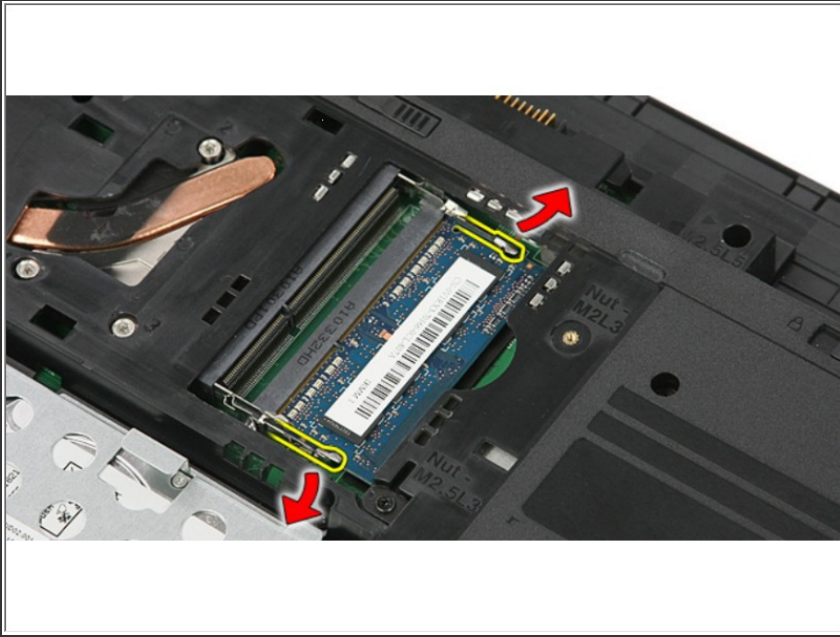

- Pry the retention clips away from the memory module until it pops up.

Step 6 — Remove the Memory Module

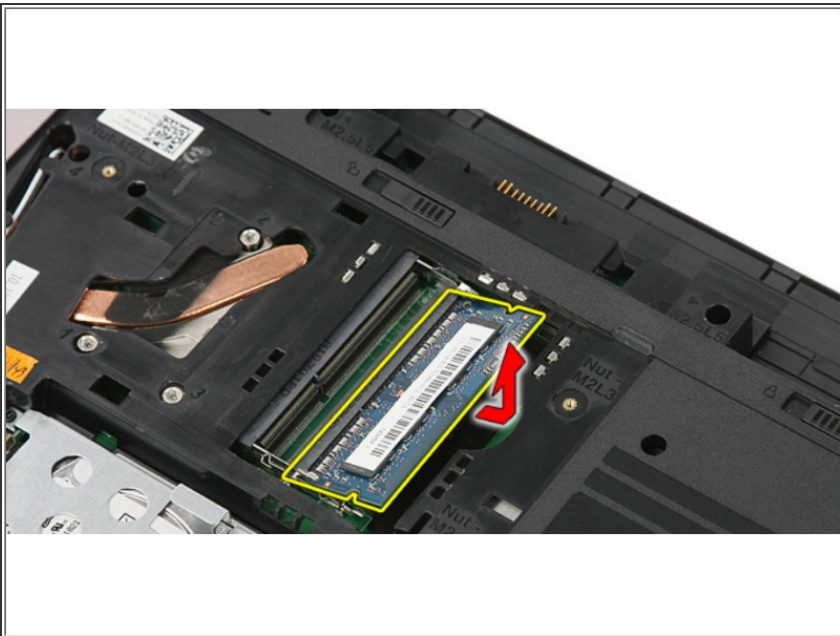

- Remove the memory module from its connector on the system board.