




Dell Vostro 2520 Memory Module Replacement

Written By: Johnathan Hammond

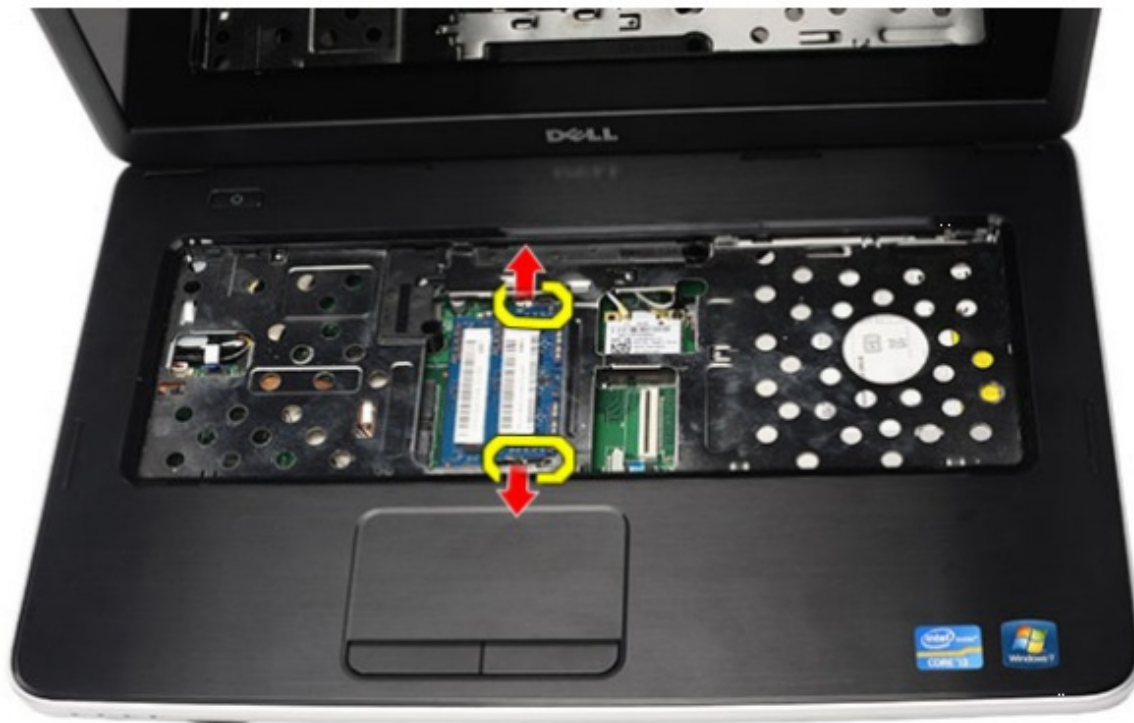

INTRODUCTION

In this guide, we will show you how to remove and replace the Memory Module.

TOOLS:

- [Spudger](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Unlocking the Battery



- Slide the release latches to unlock the battery.

Step 2 — Removing the Battery



- Slide the battery and remove it from the computer.

Step 3 — Prying the Tabs



- Pry up to release the tabs securing the keyboard to the computer.

Step 4 — Flip the Keyboard



- Flip the keyboard and lay it on the palm-rest.

Step 5 — Disconnect the Cable



- Disconnect the keyboard cable from the system board.

Step 6 — Remove the Keyboard



- Remove the keyboard from the computer.

Step 7 — Popping up the Memory Module



- Pry the retention clips away from the memory module until it pops up.

Step 8 — Removing the Memory Module



- Remove the memory module from the computer.

This document was last generated on 2018-06-23 03:24:34 AM.