




Dell Vostro 15 7570 Memory Module Replacement


Written By: Johnathan Hammond

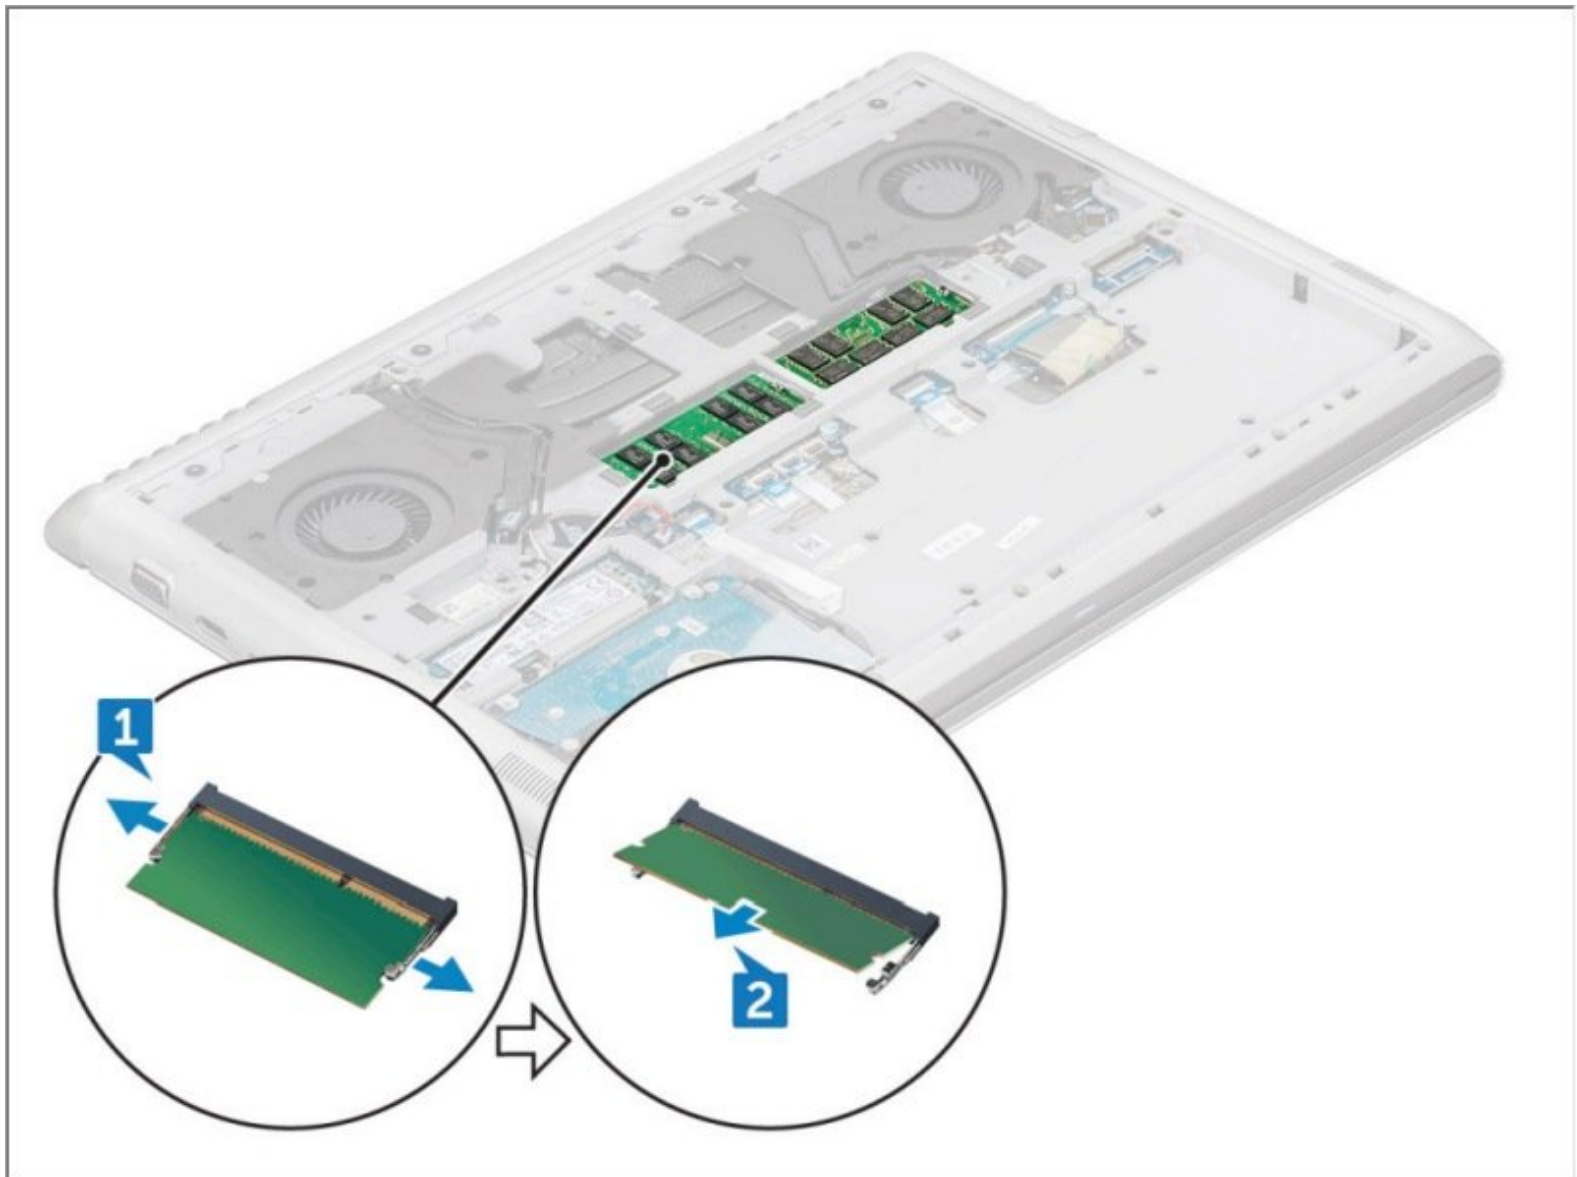

 **TOOLS:**


- Spudger (1)
 - Phillips #0 Screwdriver (1)
 - Phillips #1 Screwdriver (1)
-

Step 1 — Base Cover

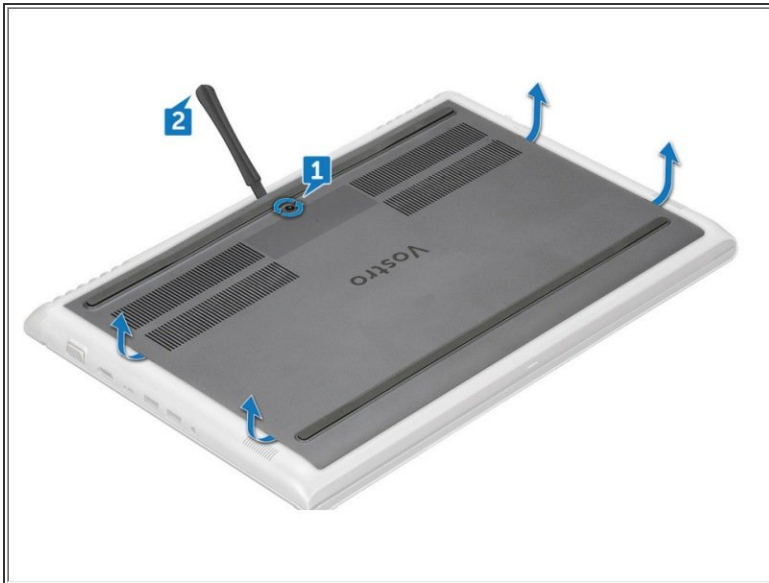


- Loosen the M2.5x2+3.5 captive screws that secure the base cover to the computer [1].
 - Pry the base cover from the edge [2].
 - Lift the base cover away from the computer

Step 2 — Battery

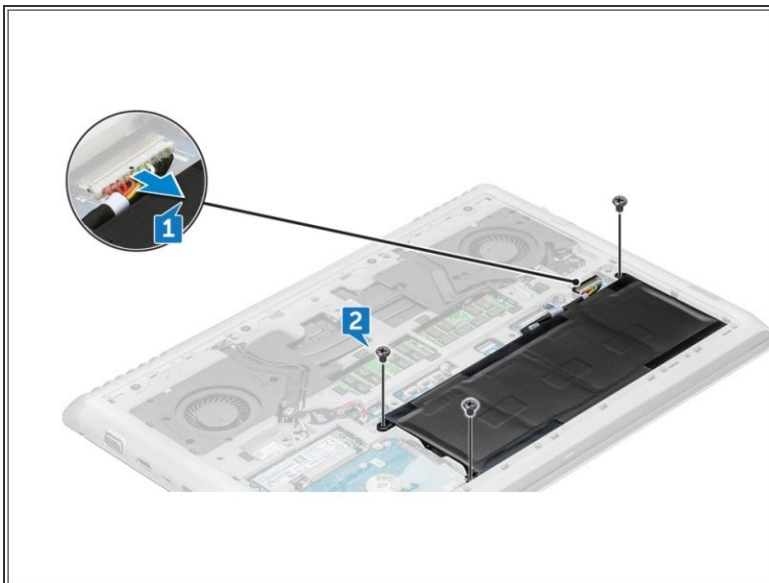

- Disconnect the battery cable from the connector on the system board [1].
 - Remove the M2x3L screws that secure the battery to the computer [2].

Step 3 — Memory Module

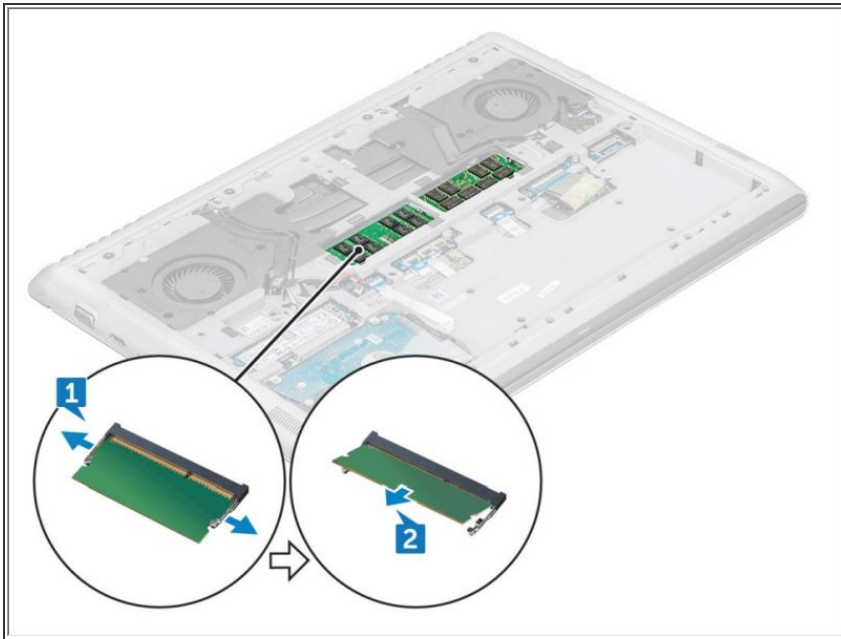

- Pry the clips securing the memory module until the memory pops-up [1]
- Lift the memory module away from the connector [2].

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-17 02:13:15 AM.