




Dell Inspiron 11-3138 Memory Modules Replacement

Written By: Terrence15

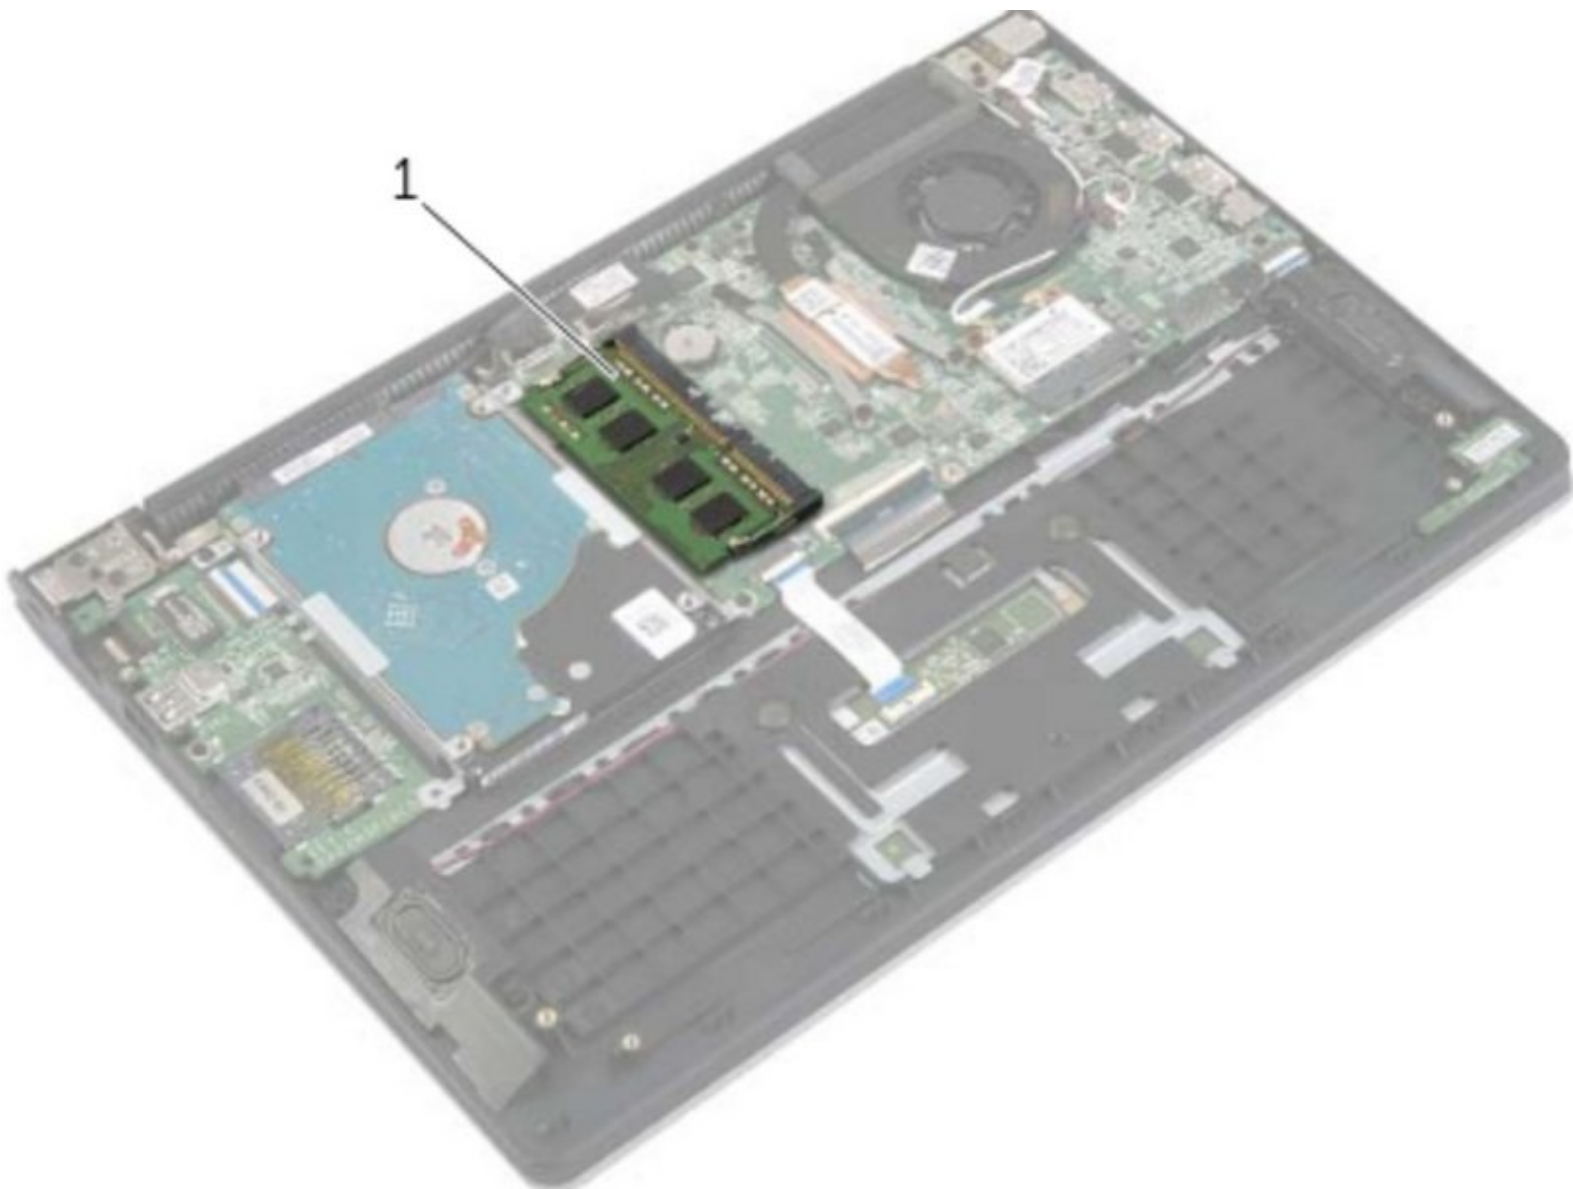


INTRODUCTION

In this guide, we will be showing you how to remove and replace the Memory Modules.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-



Step 1 — Popping up the Memory Module

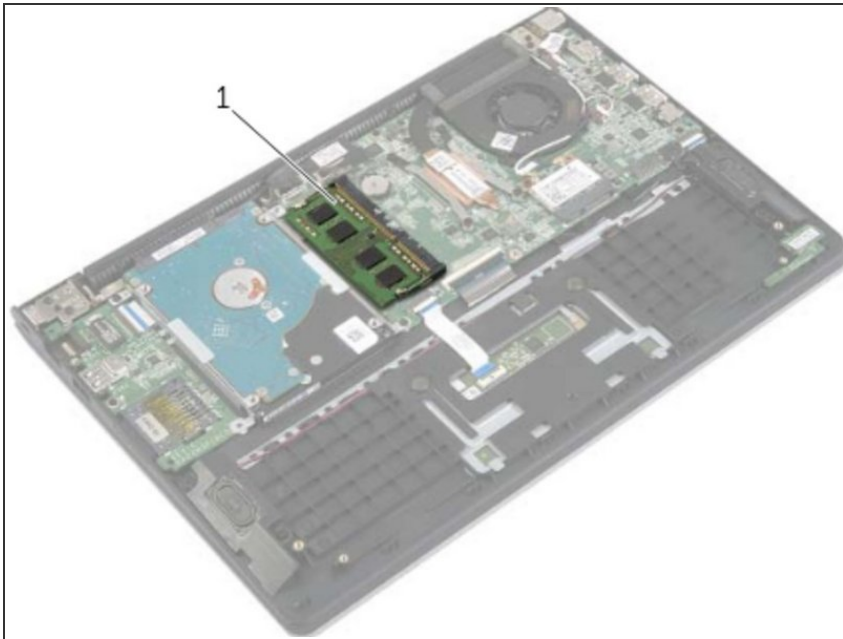

⚠ WARNING: Before working inside your computer, read the safety information that shipped with your computer and follow the steps in ["Before Working Inside Your Computer"](#). After working inside your computer, follow the instructions in ["After Working Inside Your Computer"](#).


- Use your fingertips to carefully spread apart the securing-clips on each end of the memory-module connector until the memory module pops up.

Step 2 — Removing the Memory Module

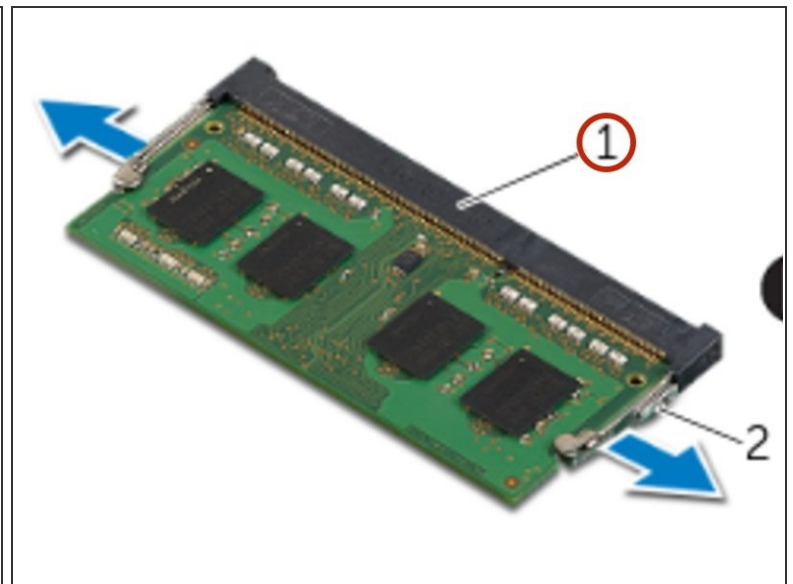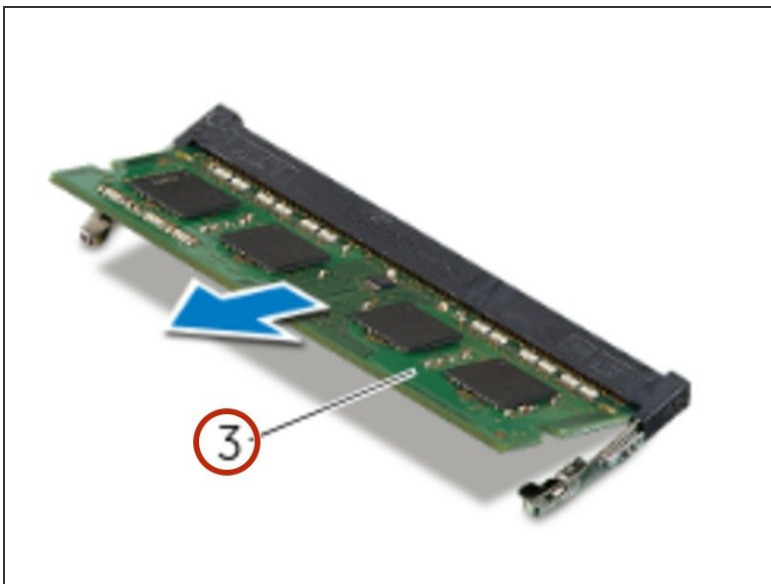


- Remove the memory module from the memory-module connector.

Step 3 — Aligning the Notch

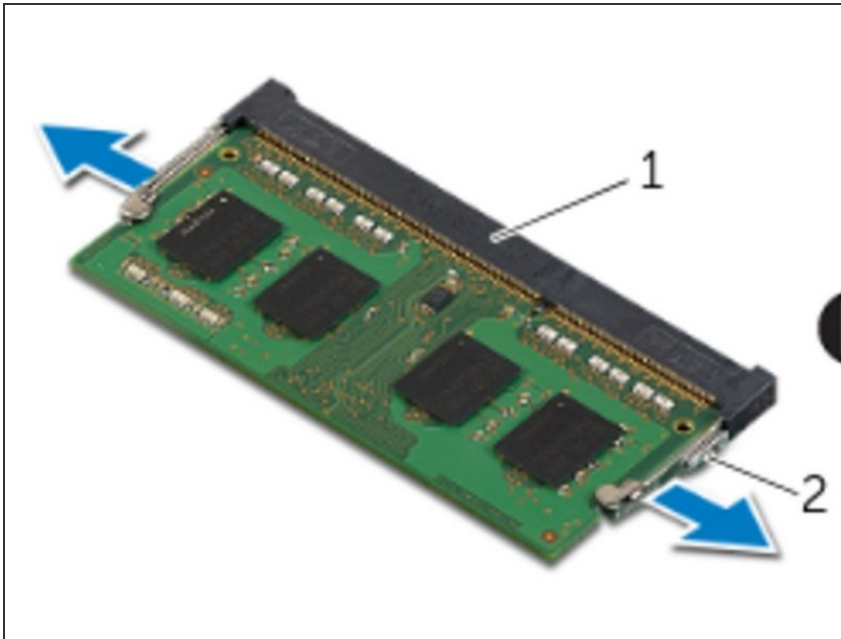

- Align the notch on the **NEW** memory module with the tab on the memory-module connector.

Step 4 — Securing the Memory Module

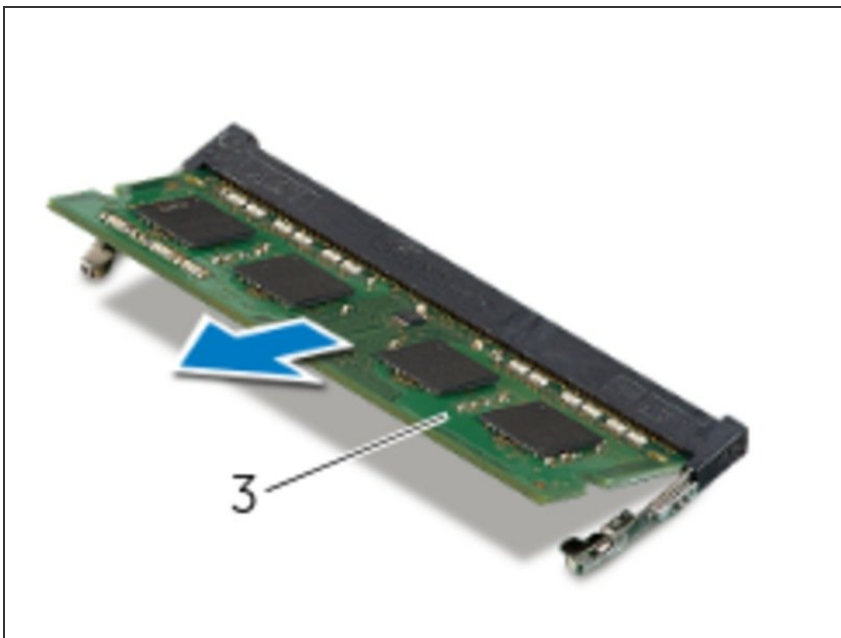

- Slide the memory module firmly into the connector at an angle and press the memory module down until it clicks into place.
- ⓘ NOTE: If you do not hear the click, remove the memory module and reinstall it.

To reassemble your device, follow these instructions in reverse order.