



# Dell Vostro 1440 Memory Module Replacement

Written By: Johnathan Hammond



## **TOOLS:**

- [Spudger](#) (1)
-

## Step 1 — Battery



- Slide the release latches to unlock the battery.
- Slide the battery and remove it from the computer.

## Step 2 — KeyBoard




- Pry up to release the top four snaps securing the keyboard to the computer.

### Step 3



- Flip the keyboard over and lay it on the palm rest.

### Step 4

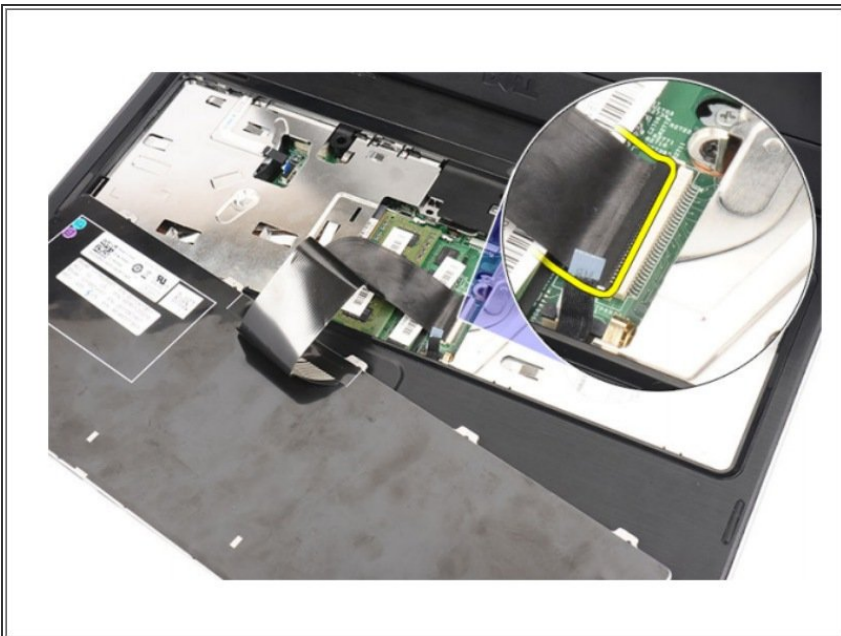



- Disconnect the keyboard cable from the system board.

## Step 5



- Remove the keyboard from the computer.

## Step 6 — Memory Module

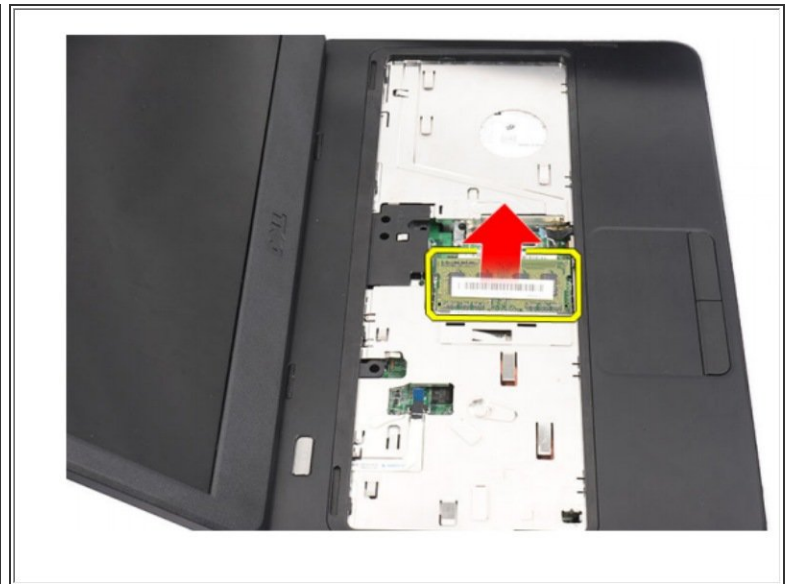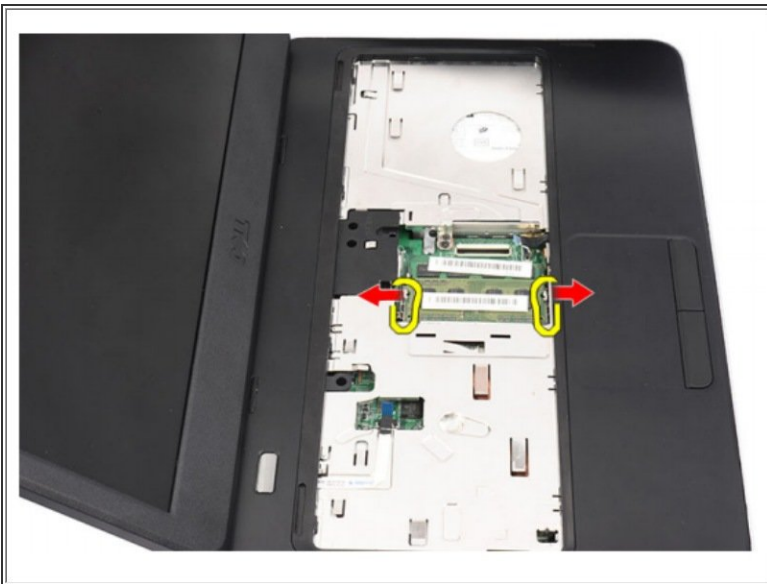

- Pry the retention clips away from the memory module until it pops up.
- Remove the memory module from the computer.

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2021-02-04 01:59:39 PM (MST).

