




Dell Studio XPS M1640 Memory Module Replacement


Written By: Johnathan Hammond

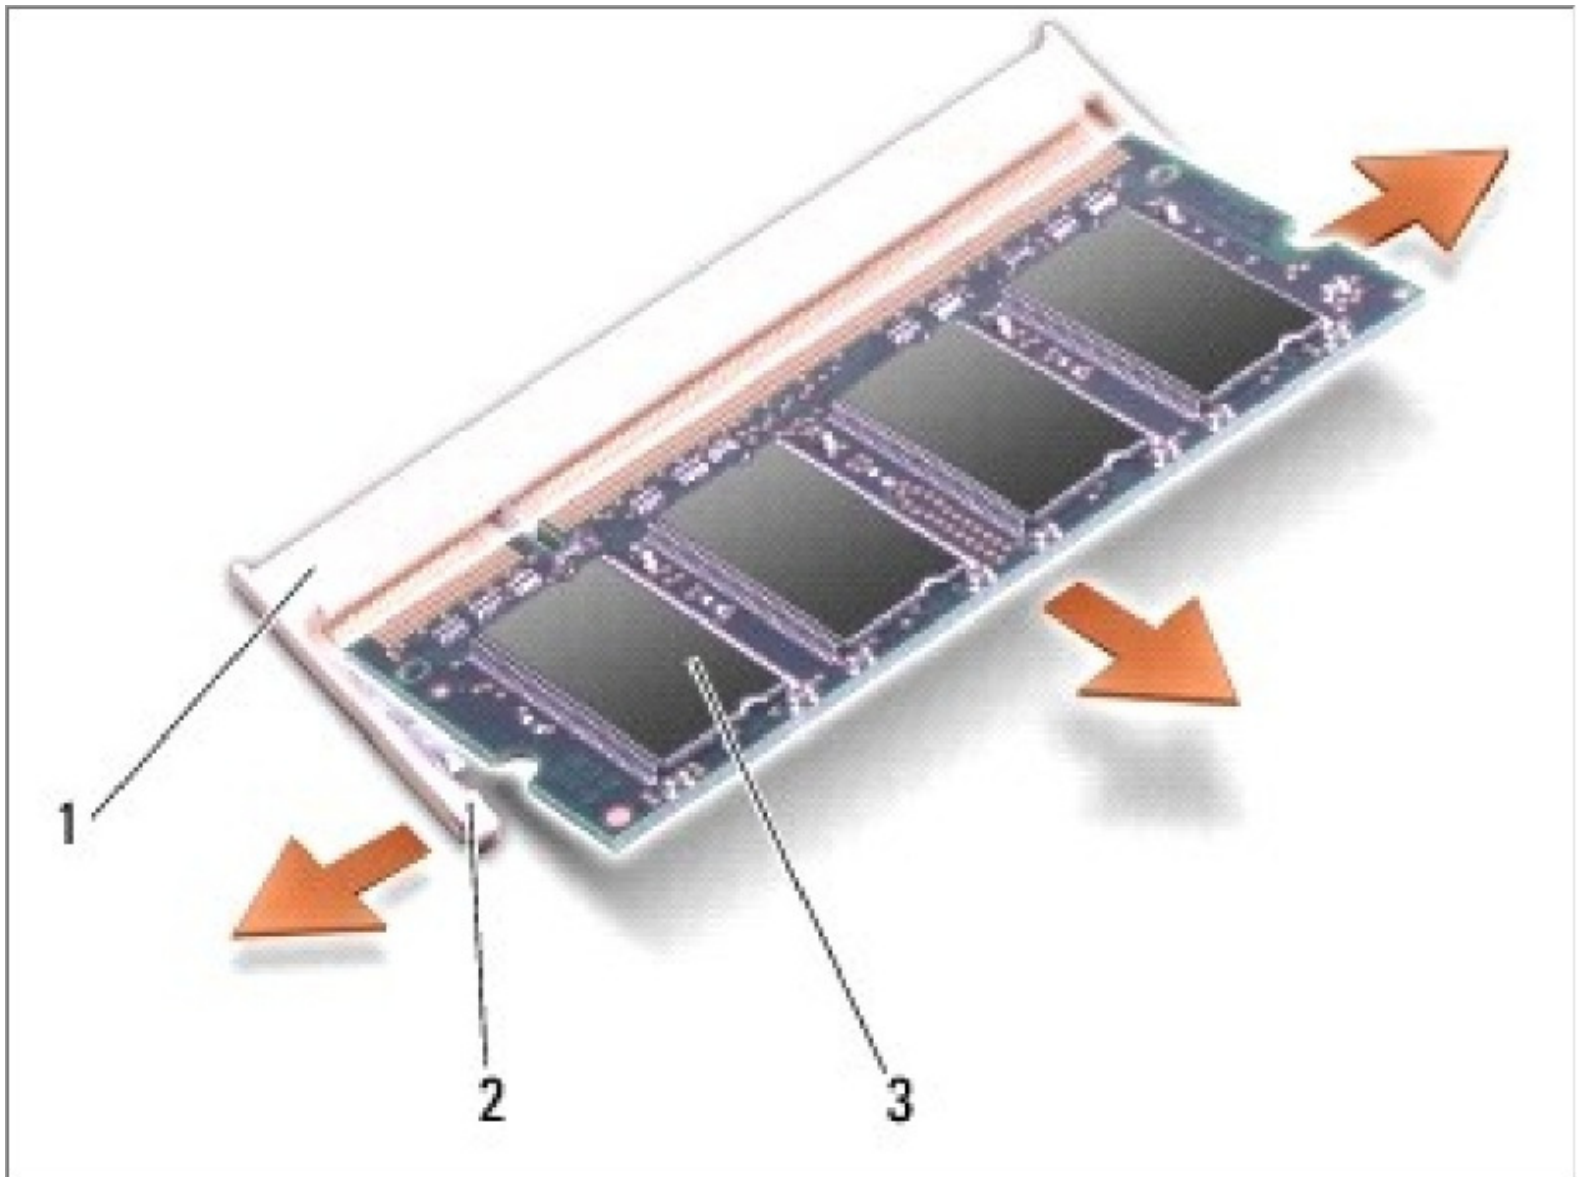

 **TOOLS:**

- [Phillips #0 Screwdriver](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Battery

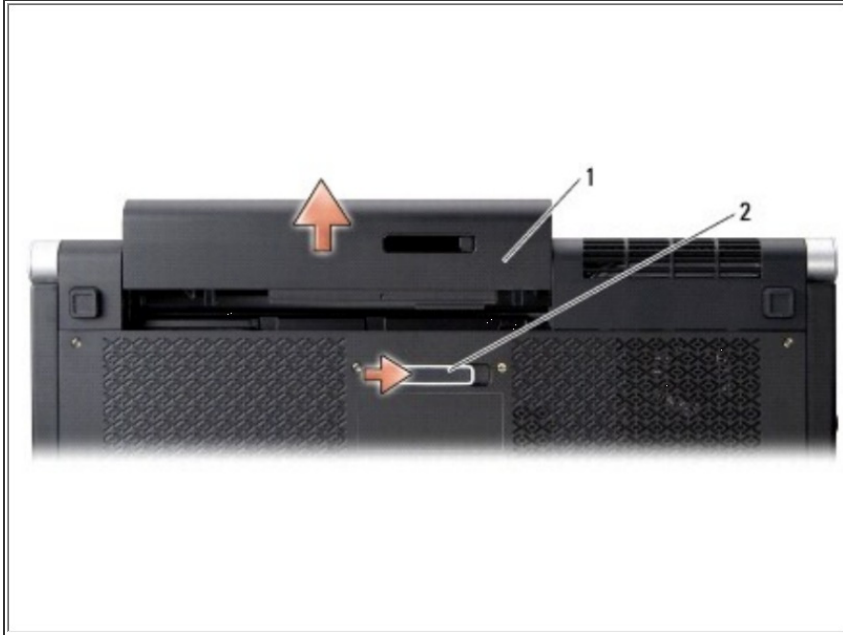


- Slide the battery release latch to the side. {2}
- Slide the battery out of the battery bay. {1}

Step 2 — Base Cover



- Loosen the ten captive screws on the base cover and lift the cover off the computer at an angle as shown in the figure.

Step 3 — Memory Module

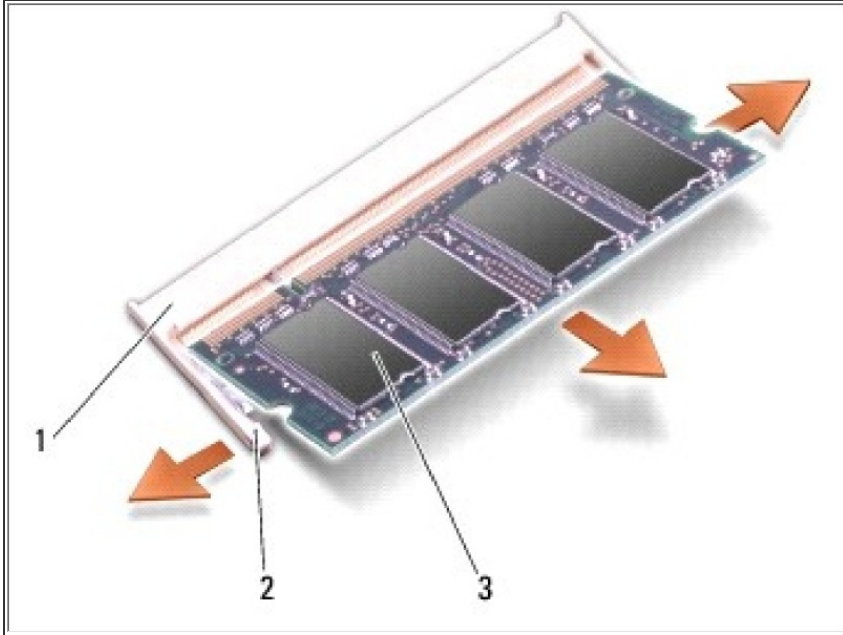

(i) NOTICE: To prevent damage to the memory module connector, do not use tools to spread the memory module securing clips.

- Use your fingertips to carefully spread apart the securing clips on each end of the memory module connector until the module pops up.
- Remove the module from the connector.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2018-06-23 03:30:58 AM.