




# Dell Inspiron 1210 Memory Module Replacement

Written By: Teren Wallace

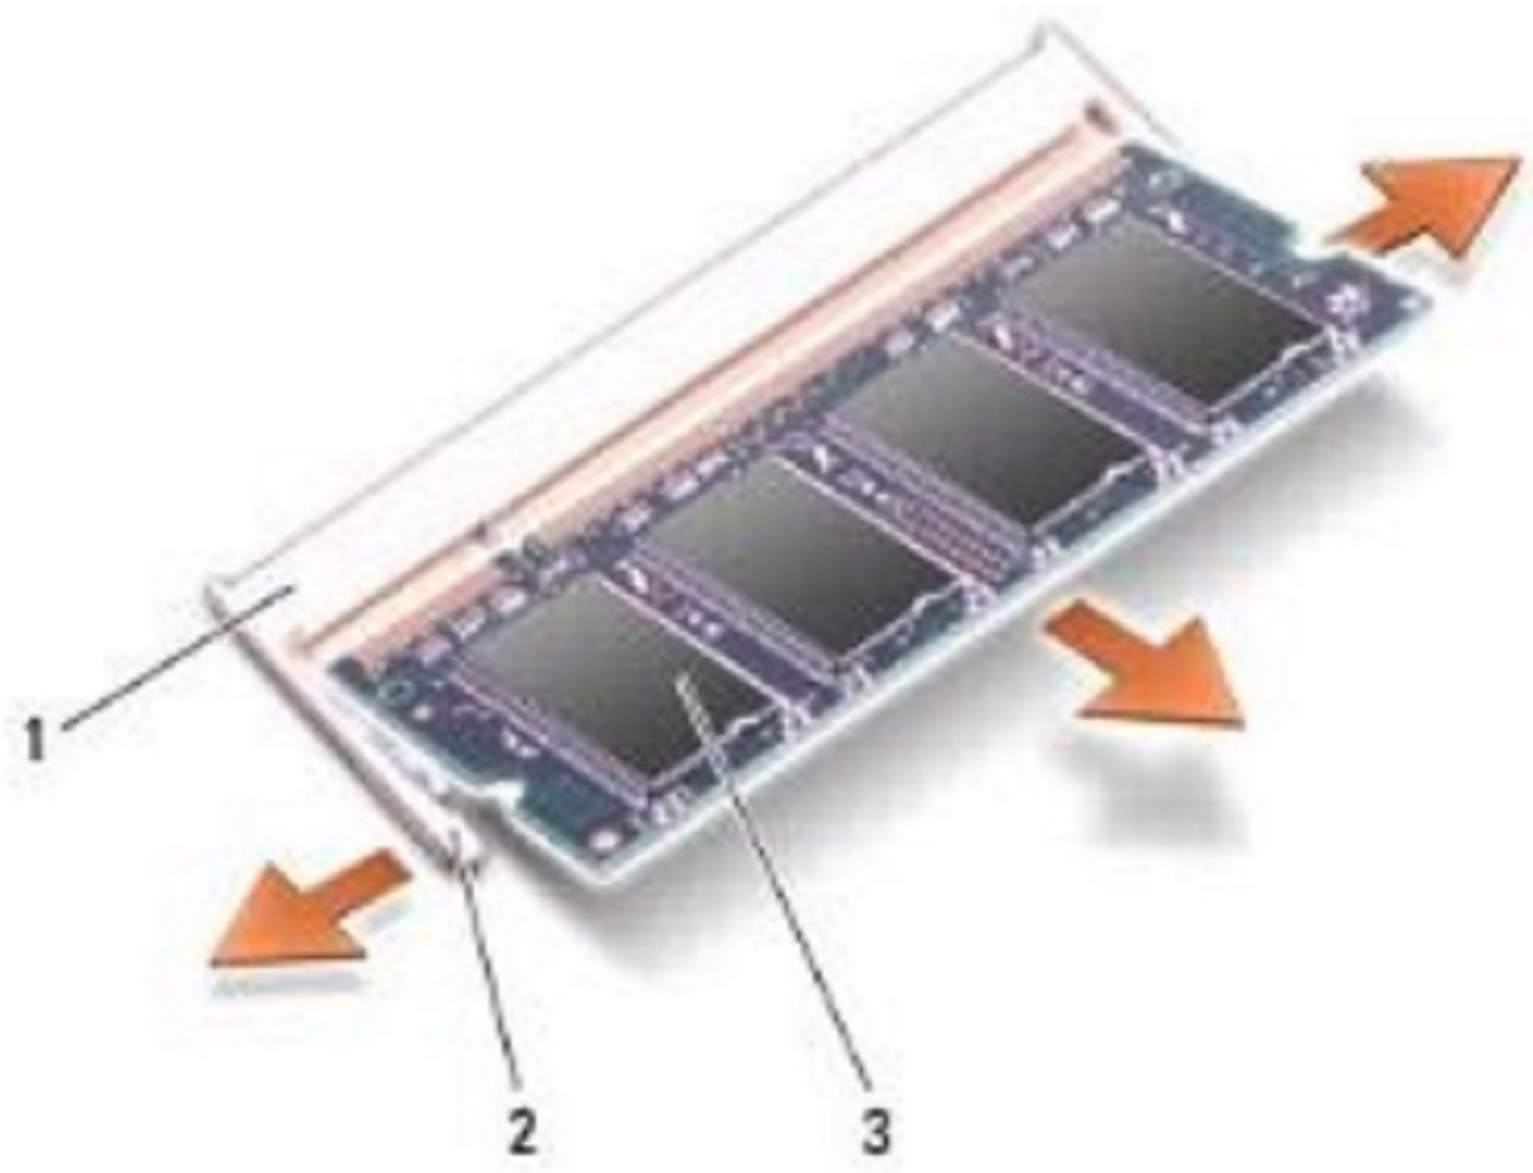

## INTRODUCTION


In this guide, we will be showing you how to remove and replace the Hard Drive.

---

### TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-


## Step 1 — Removing the Module Cover

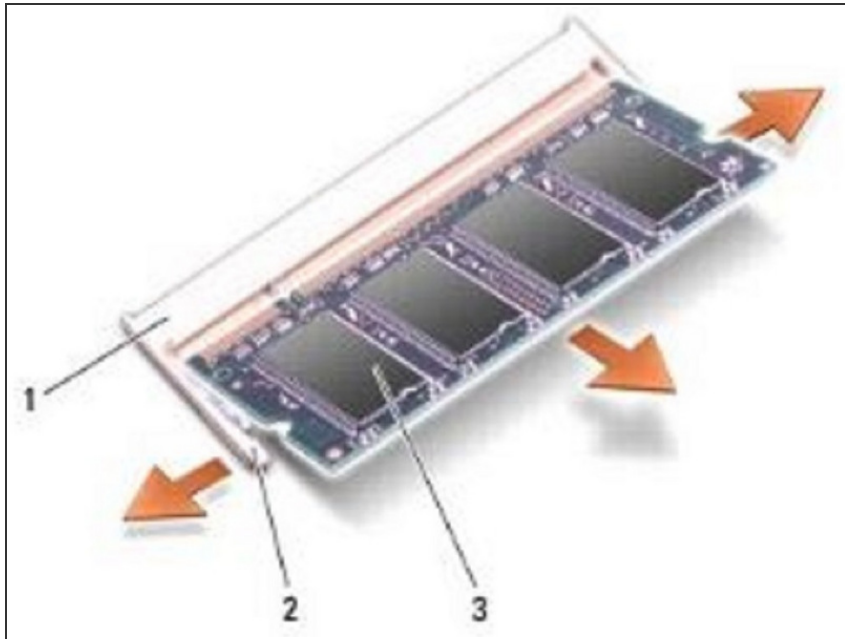

**⚠** Follow the procedures in [Before You Begin](#).

- Remove the module cover (see Base Cover).


## Step 2 — Popping up the Memory Module

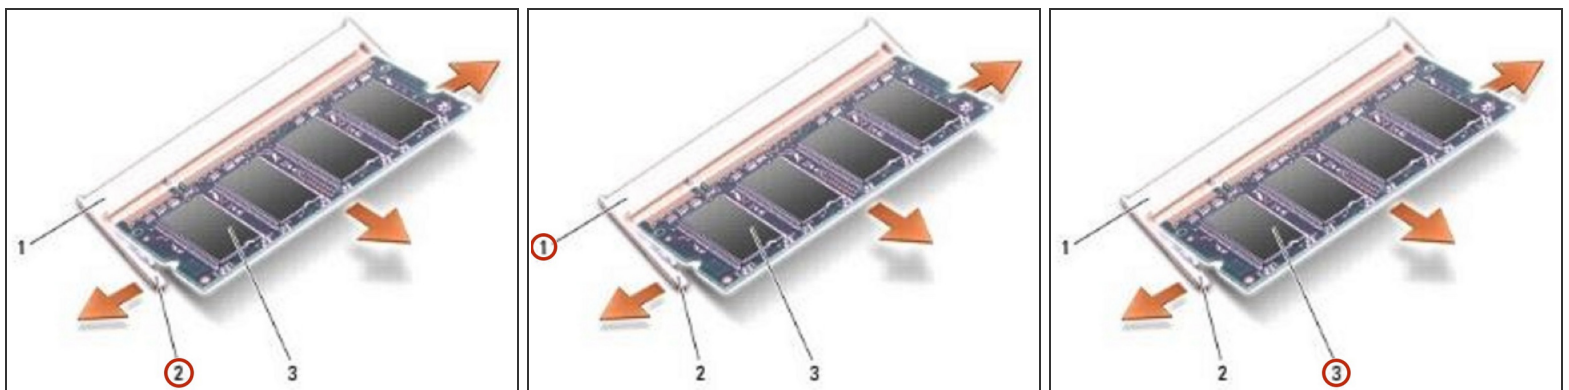

**⚠** NOTICE: To prevent damage to the memory module connector, do not use tools to spread the memory module securing clips.



- Use your fingertips to carefully spread apart the securing clips on each end of the memory module connector until the module pops up.

### Step 3 — Removing the Module

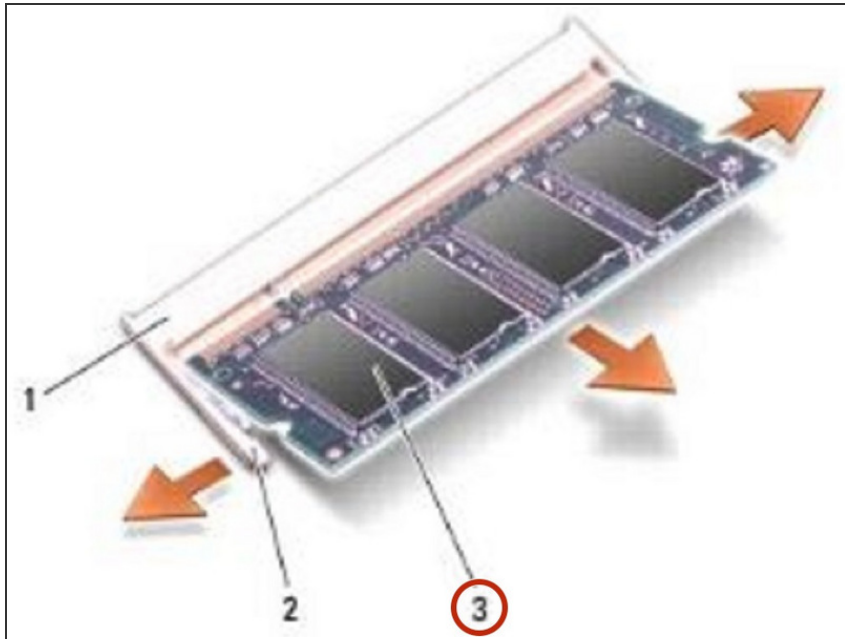


- Remove the module from the connector.

### Step 4 — Align the Notch

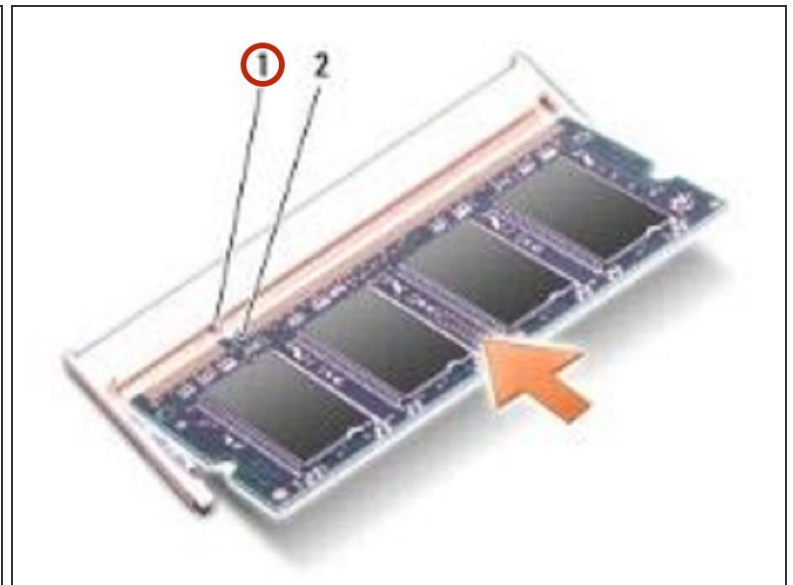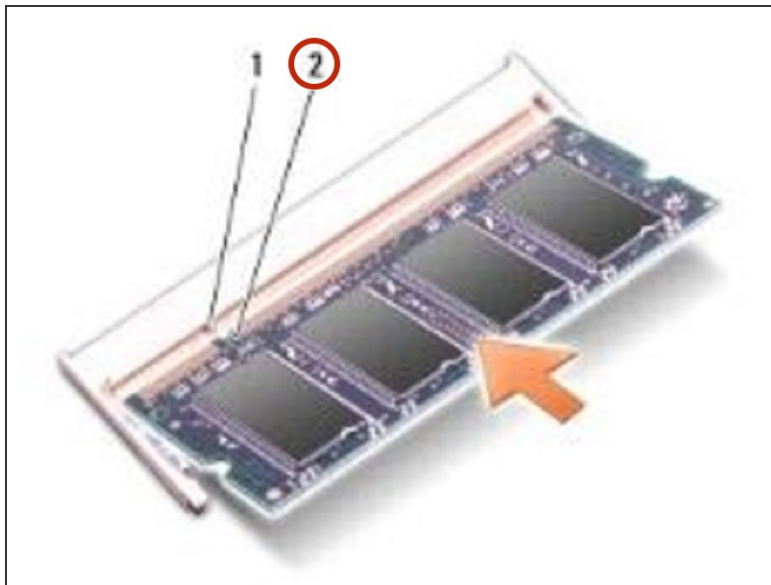

- Align the notch in the module connector with the tab in the connector slot.

## Step 5 — Sliding the Module

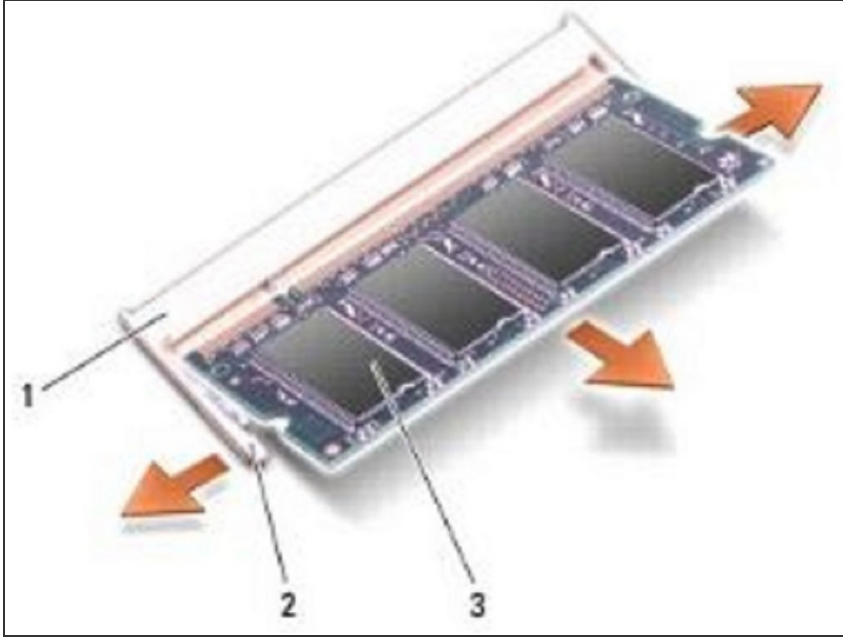

- Slide the **NEW** module firmly into the slot at a 45-degree angle, and rotate the module down until it clicks into place. If the module does not click into place, remove the module and reinstall it.

ⓘ NOTE: If the memory module is not installed properly, the computer may not boot.

This document was last generated on 2018-05-20 09:08:01 PM.