




# Dell Studio 1450 Memory Module Replacement


Written By: Johnathan Hammond

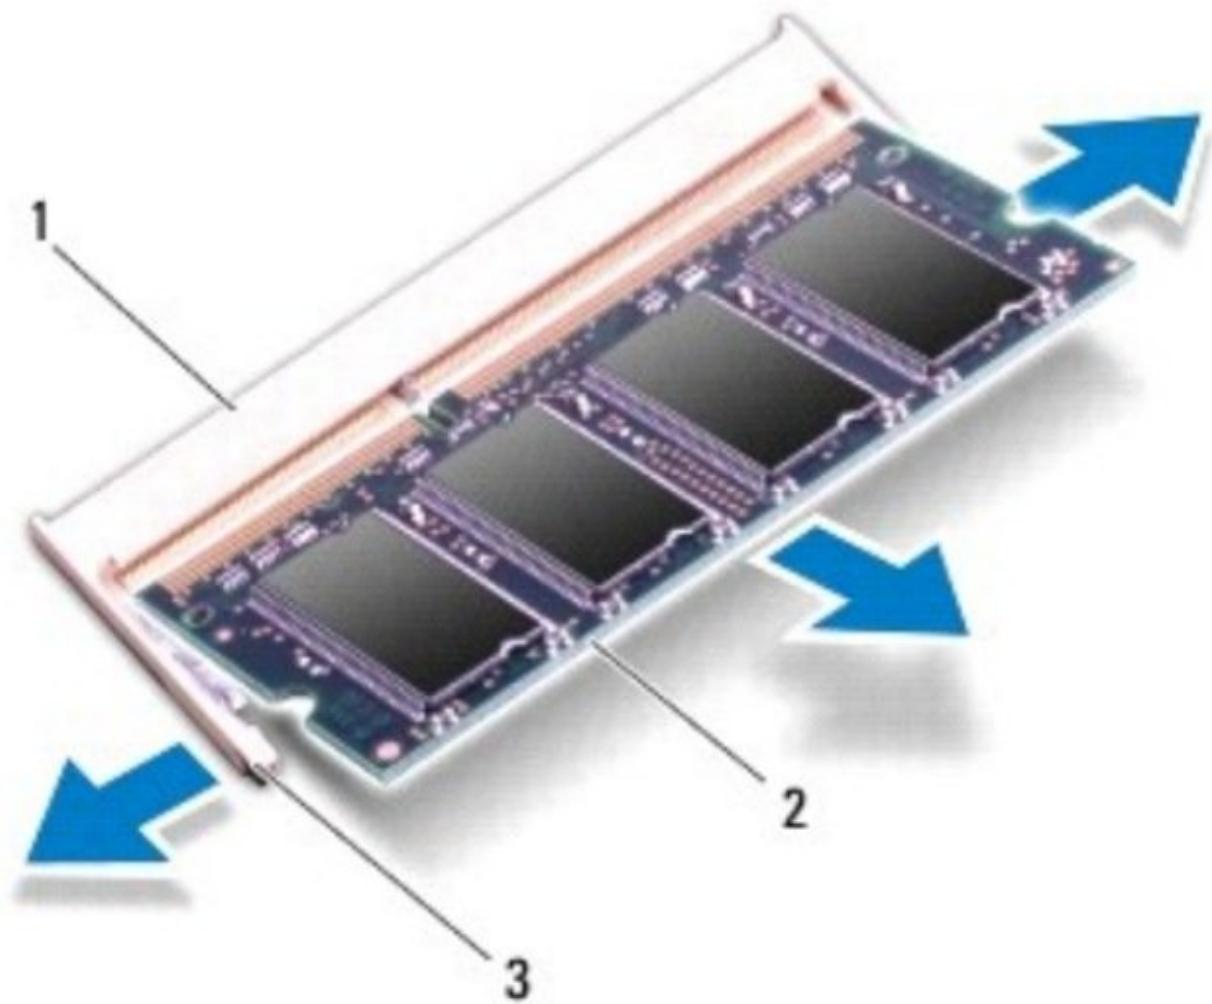

 **TOOLS:**


- [Phillips #0 Screwdriver](#) (1)
-

## Step 1 — Battery

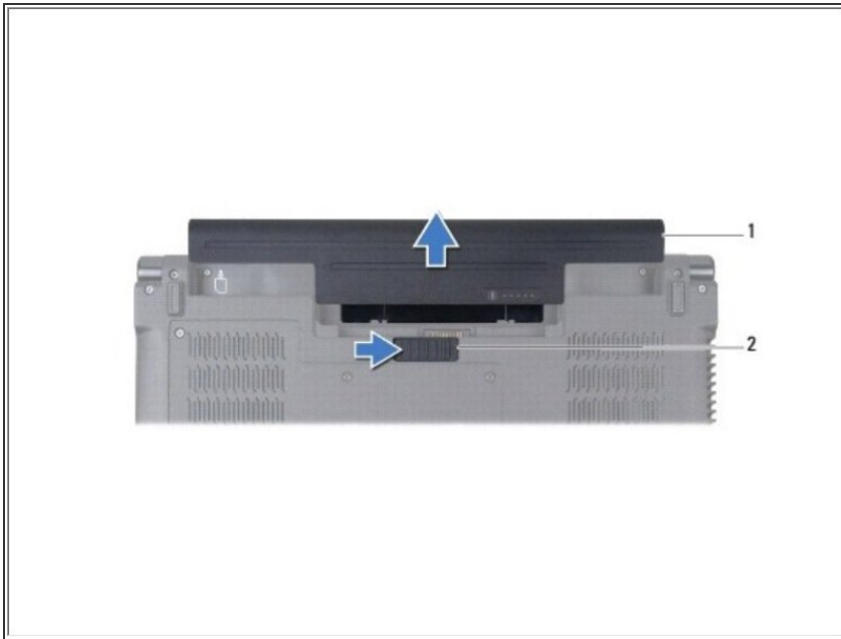


- Slide the battery release latch until it clicks into place.
- Slide the battery out of the battery bay.

## Step 2 — Base Cover

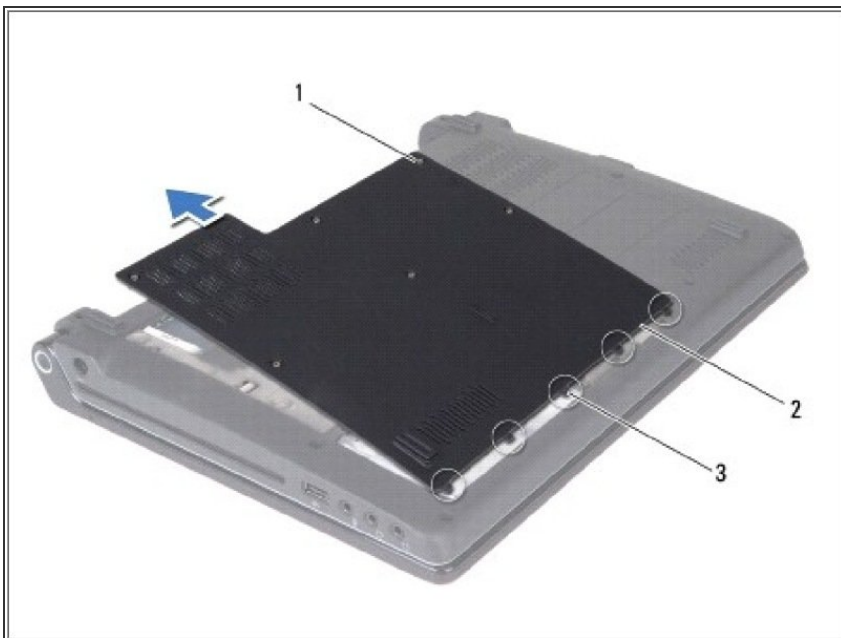

- Turn the computer over and loosen the six captive screws on the base cover.
- Lift the base cover off the computer.

### Step 3 — Memory Module

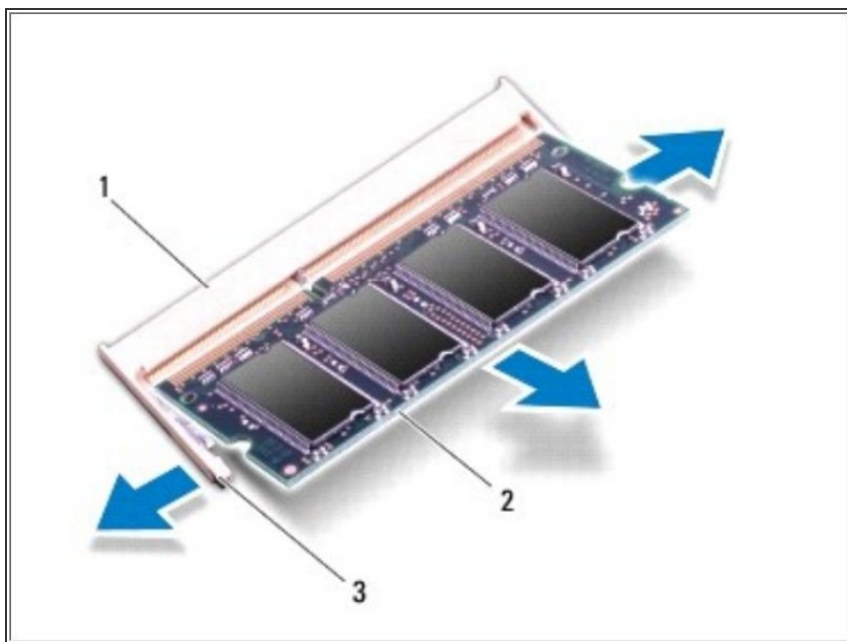

- Use your fingertips to carefully spread apart the securing clips on each end of the memory module connector until the memory module pops up.
- Remove the memory module from the memory module connector.

To reassemble your device, follow these instructions in reverse order.