




Dell Inspiron 14z 1470 Hard Drive Replacement

Written By: Teren Wallace

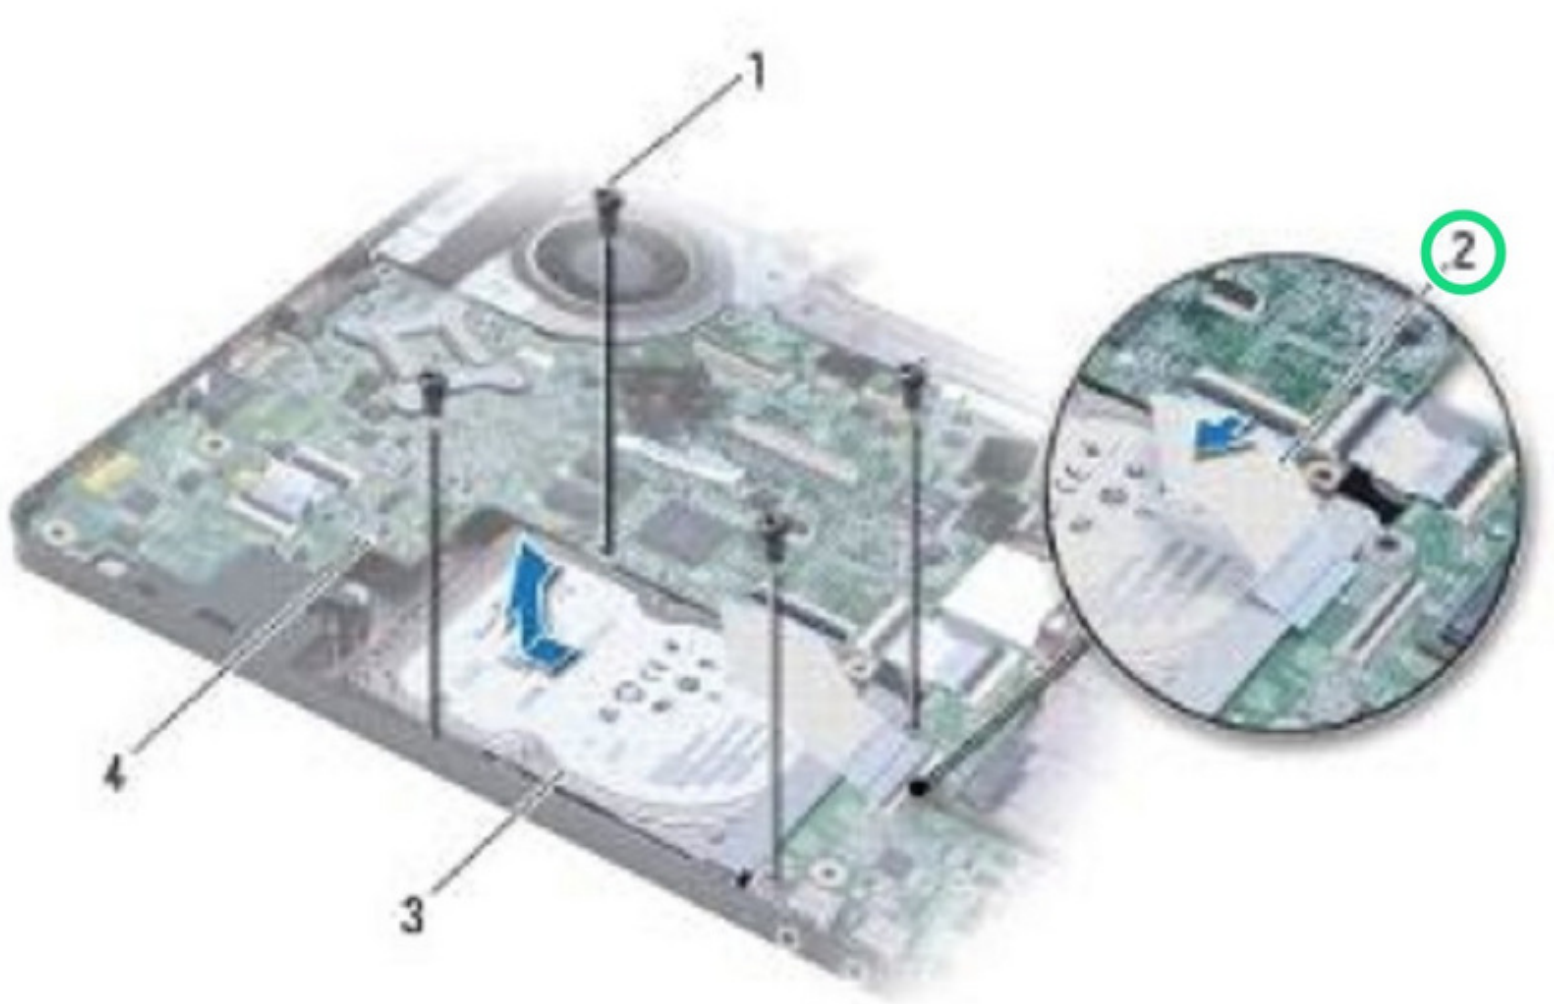


INTRODUCTION

In this guide, we will be showing you how to remove and replace the Hard Drive.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-


Step 1 — Disconnecting the Audio Cable

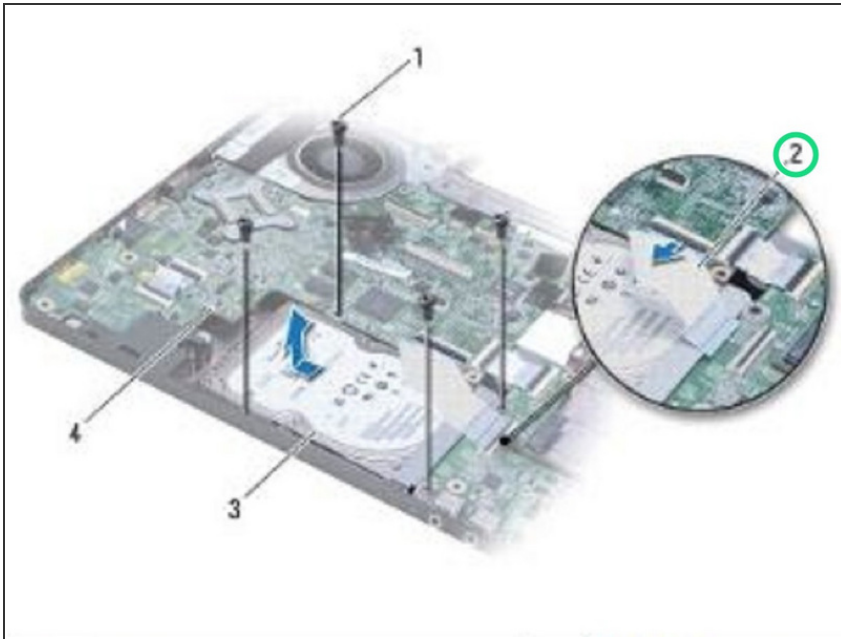

⚠ WARNING: Before working inside your computer, read the safety information that shipped with your computer. Follow the procedures in [Before You Begin](#).


- Disconnect the USB/audio cable from the system board.

Step 2 — Remove the Screws

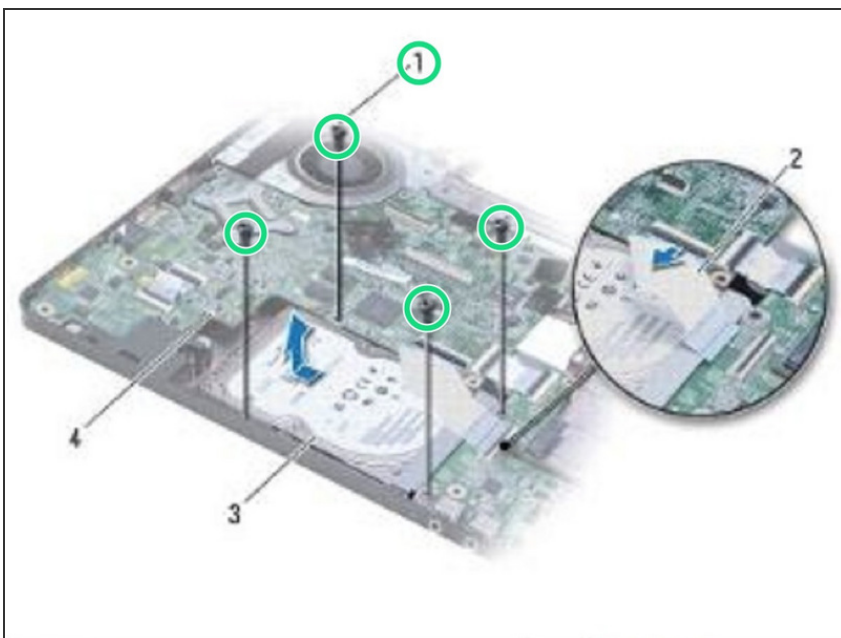

- Remove the four screws that secure the hard drive assembly to the computer base.

Step 3 — Lifting the Hard Drive Assembly

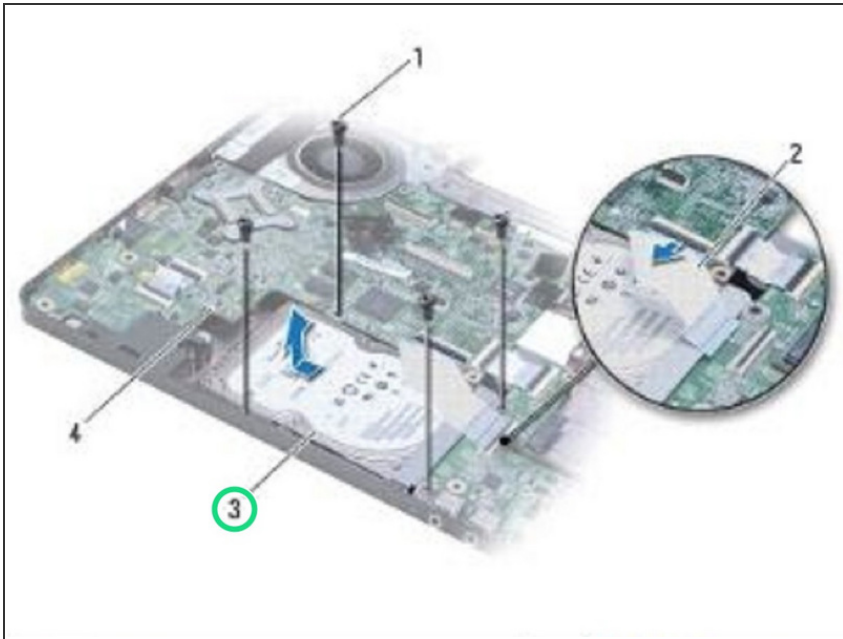

- Slide and lift the hard drive assembly out of the computer base.

Step 4 — Remove the Screws



- Remove the four screws that secure the hard drive to the hard drive bracket.

Step 5 — Remove the Hard Drive




- Remove the hard drive.

Step 6 — Placing the Hard Drive




- Place the **NEW** hard drive in the hard drive bracket and replace the four screws that secure the hard drive bracket to the hard drive.

Step 7 — Sliding the Hard Drive

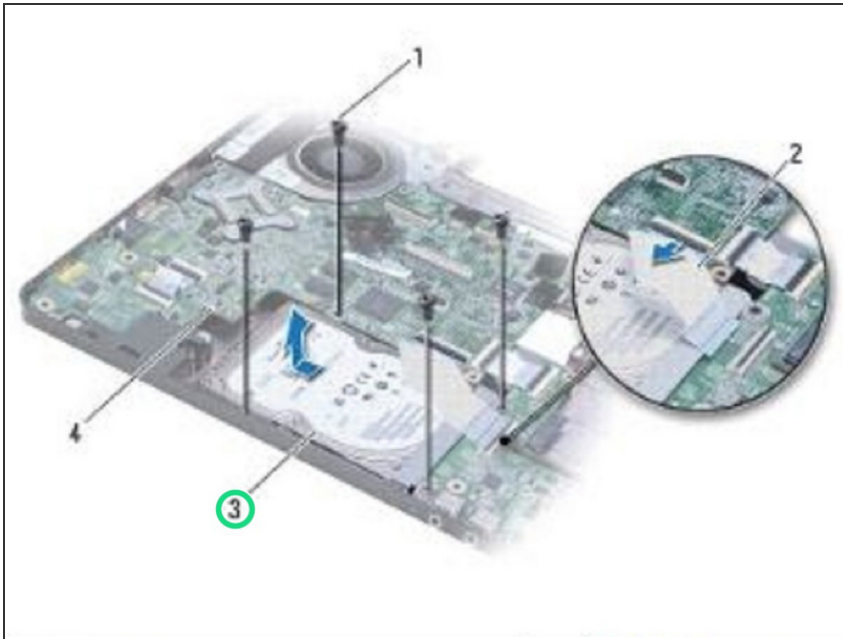


- Slide the hard drive assembly into the computer base until it is fully seated.

Step 8 — Replace the Screws

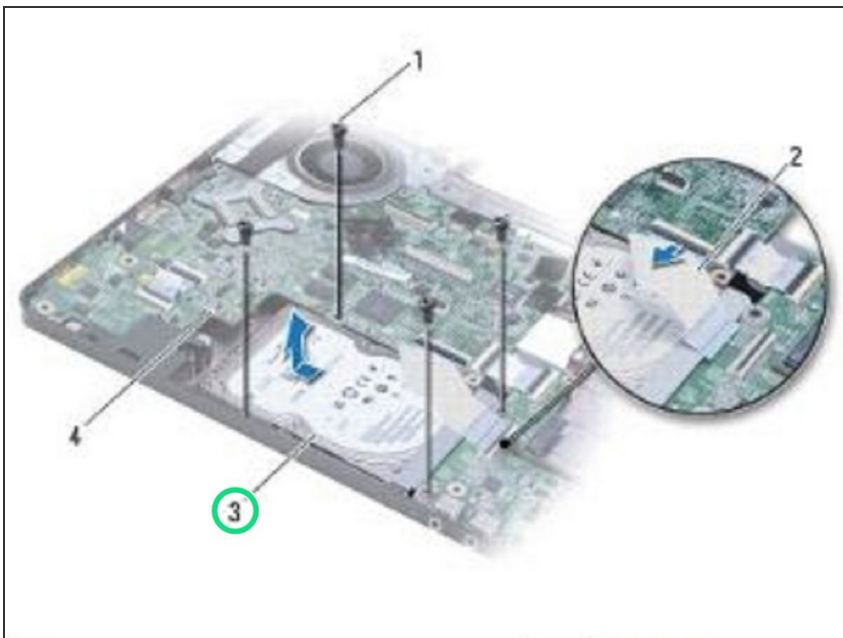

- Replace the four screws that secure the hard drive assembly to the computer base.

Step 9 — Connecting the Cable

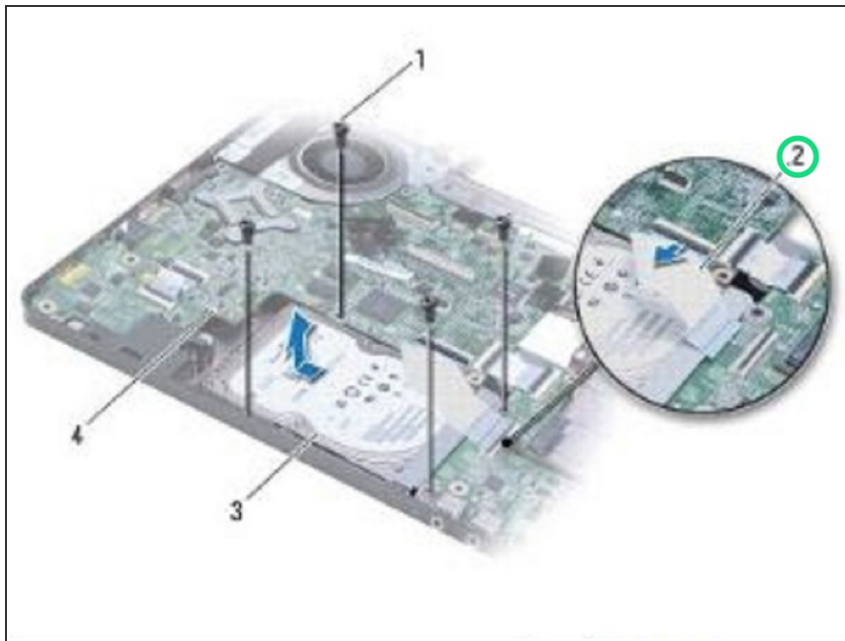

- Connect the USB/audio cable to the USB/audio board.

This document was last generated on 2018-07-31 04:25:43 AM.