



# Canon Selphy CP720 Cooling Fan Replacement

This guide demonstrates the replacement of the internal fan in the Selphy CP720.

Written By: Peter Ely



## INTRODUCTION


This guide shows how to replace the cooling fan on the Selphy CP720. This is done to fix overheating problems caused by a faulty fan.

---

### TOOLS:


- [Phillips #1 Screwdriver](#) (1)
-

## Step 1 — Cooling Fan

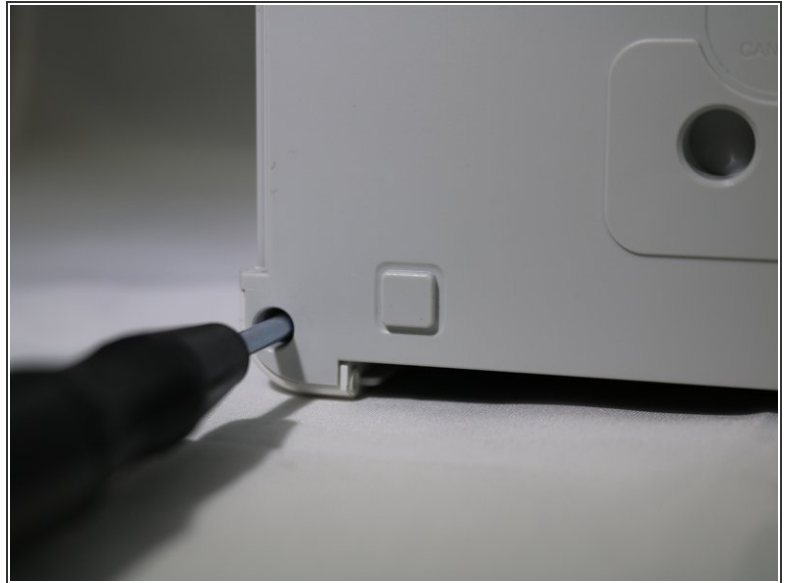


- Remove the four 8mm Phillips #1 screws from the bottom of the printer.

## Step 2

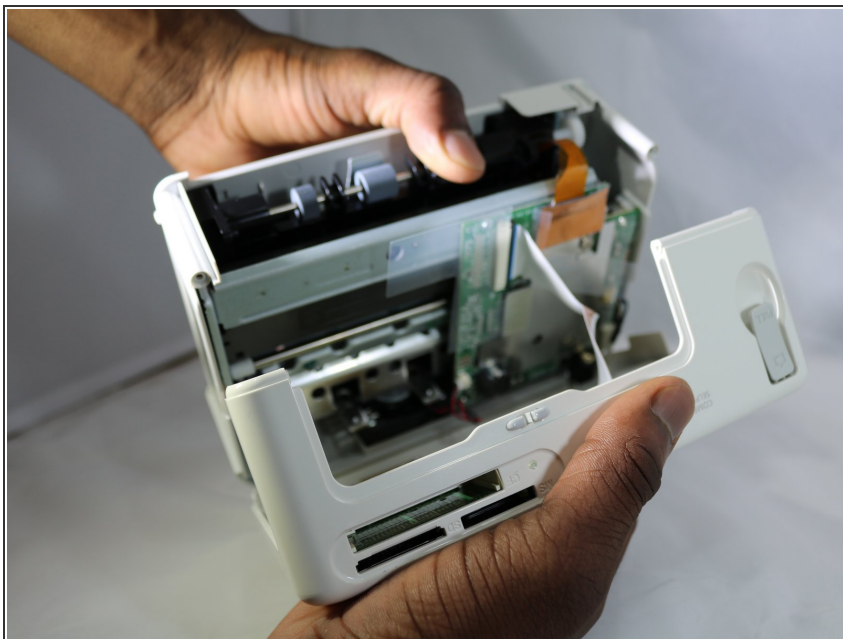


- Gently lift the top half of the printer off its base
- ⚠ A data ribbon attaches the two halves, so don't pull hard and keep the two halves close together.

### Step 3

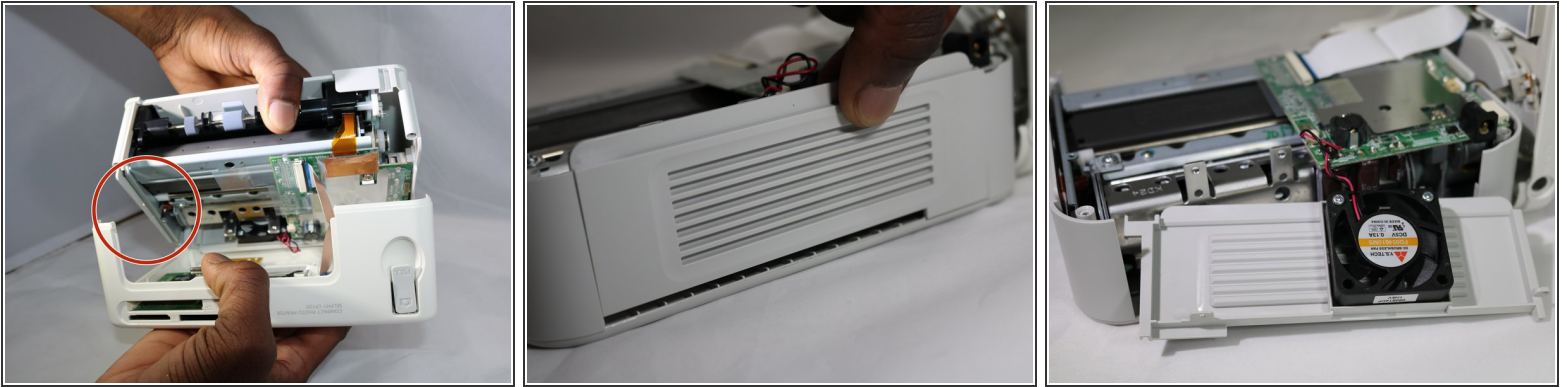

- Remove the side panel by lifting it out.

### Step 4

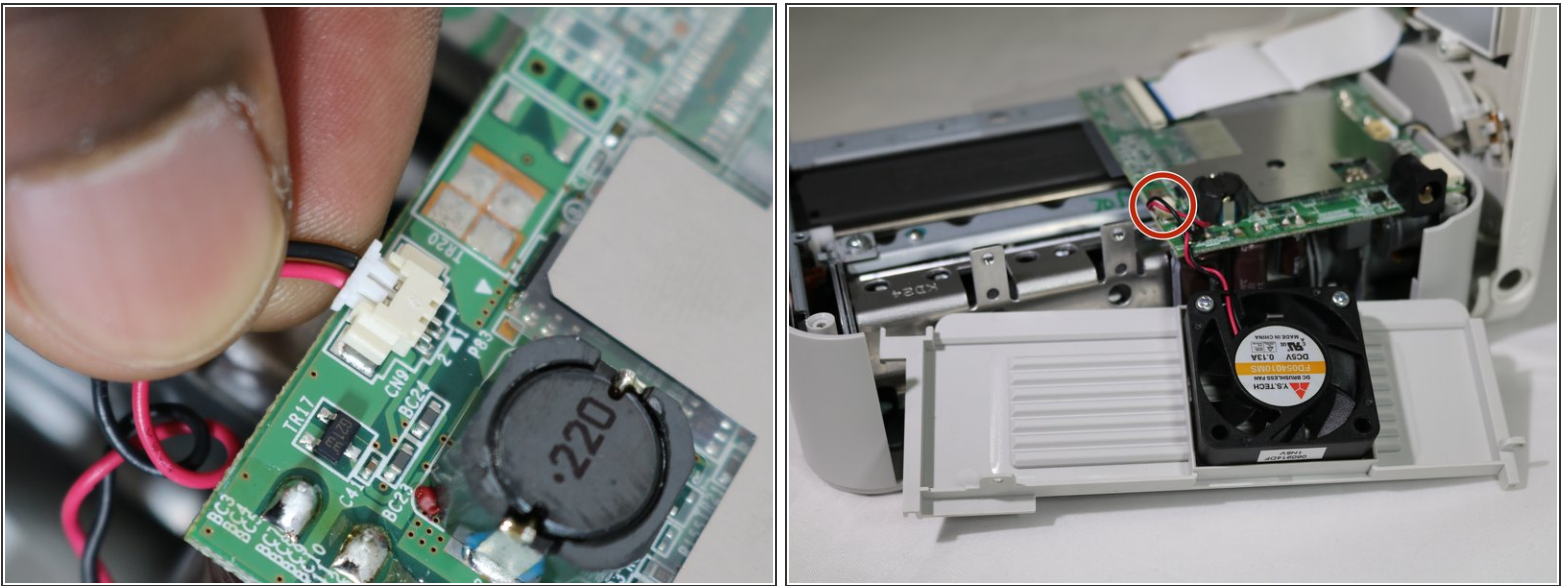

- Unplug the fan from the circuit board by gently pulling on the wire connector at the base of the port.
- ⚠ Do not tug on the wires. Slowly increasing force as you pull is the best way to detach the wires.

## Step 5



- Unscrew the two 8mm Phillips #1 screws from the fan.
- Remove the fan from the panel.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-01-15 06:22:05 AM.