




Sony VAIO SVE14AJ16L RAM Replacement

RAM replacement steps for a Sony VAIO SVE14AJ16L laptop.

Written By: Dustin Smith

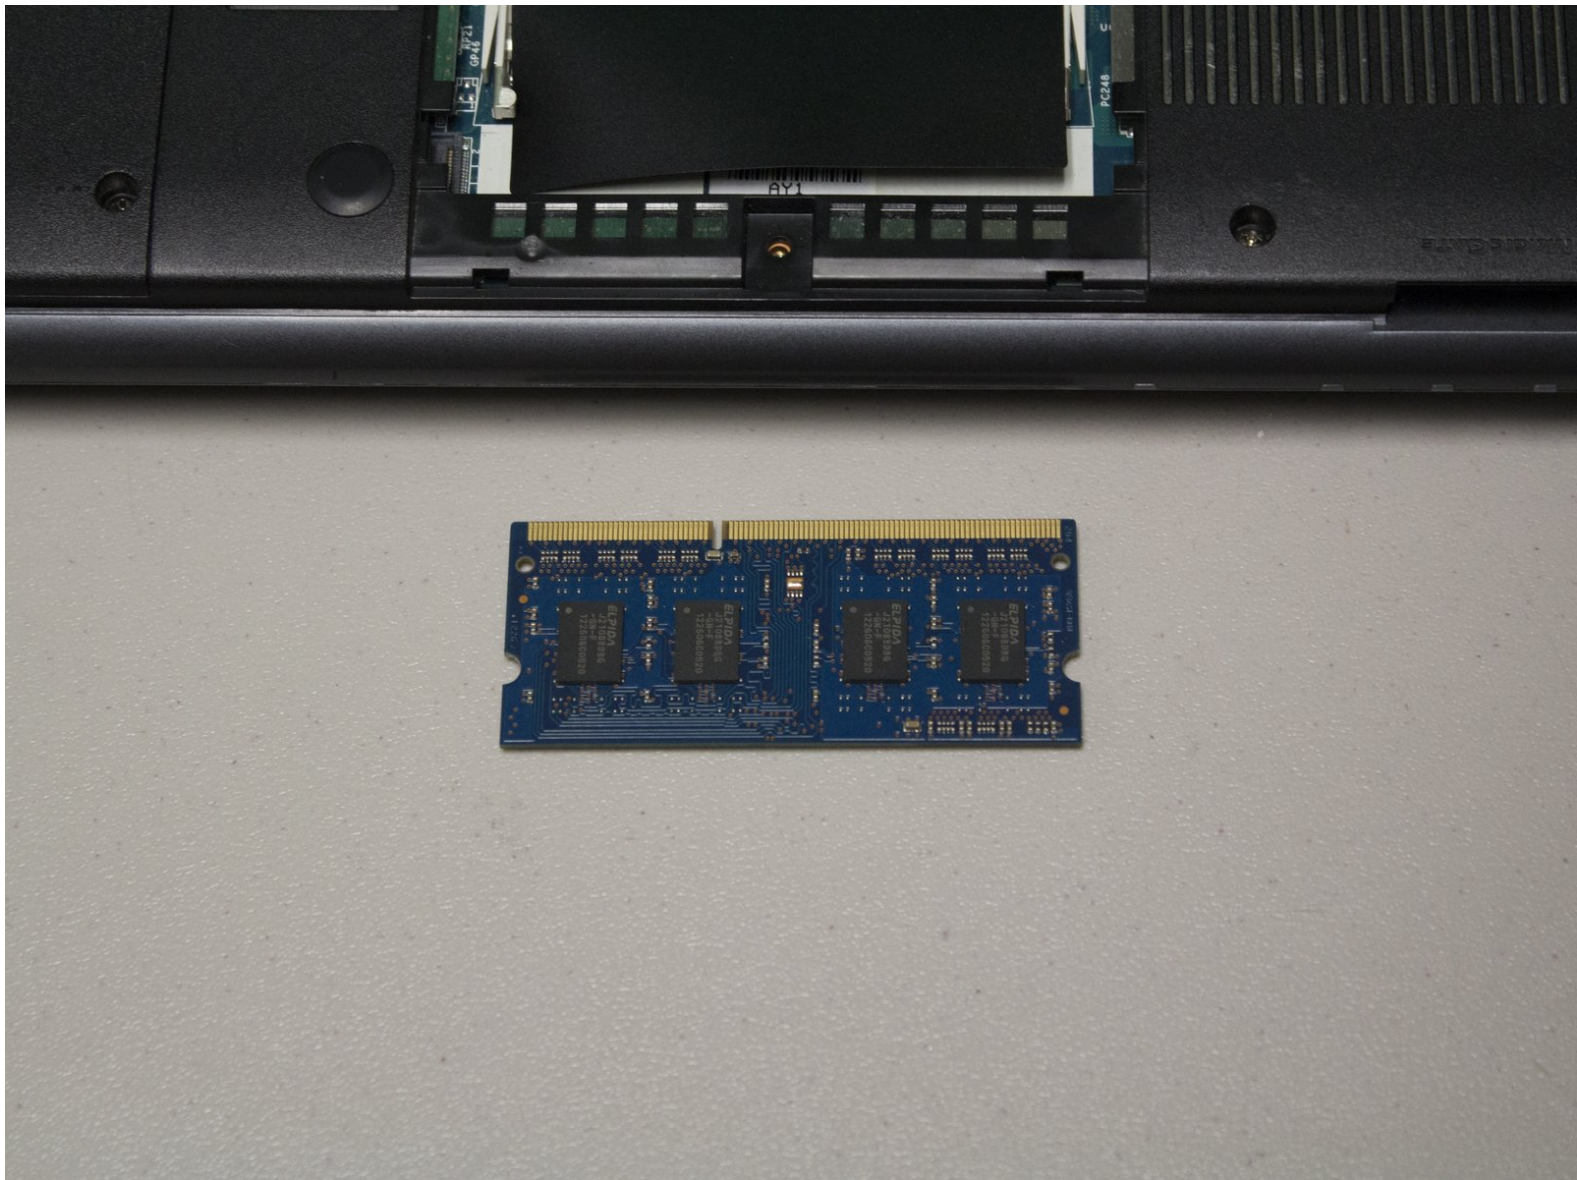

INTRODUCTION

RAM replacement steps for a Sony VAIO SVE14AJ16L laptop.

TOOLS:


- [Phillips #0 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — RAM




- ⚠ Turn your laptop off before starting.
- Turn the laptop upside down onto the closed lid so that the bottom is facing you.

Step 2

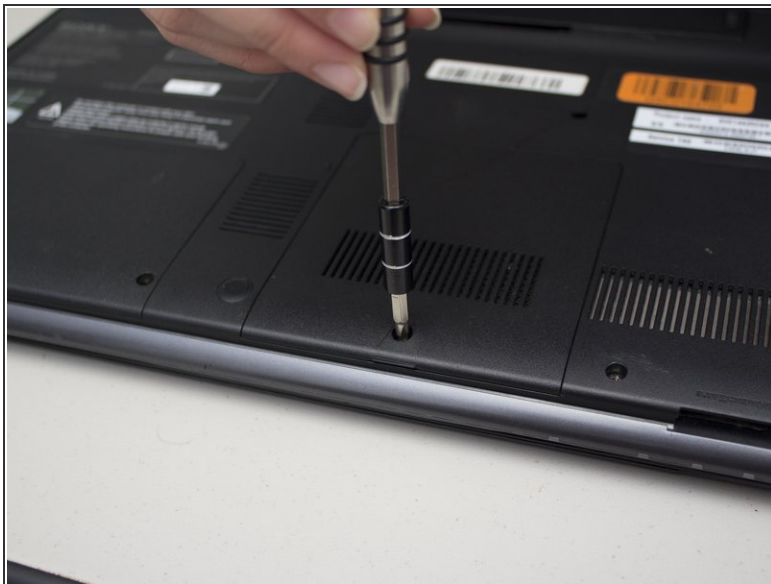


- Locate and remove the lone screw on the RAM cover with a Phillips #0 head screw driver.
- Carefully pry the RAM cover up.
 - ⓘ There will be some resistance, so use strength and not speed to remove the cover.

Step 3

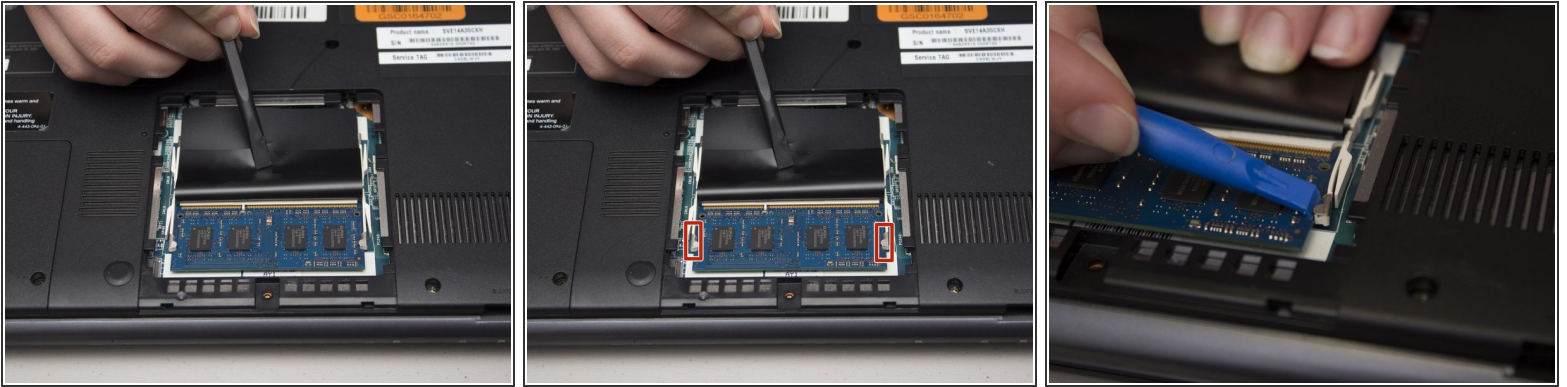

- With the cover removed, peel back the black protective plastic to expose one of the two RAM sticks.
- ⚠ Make sure not to touch any part of the blue board itself, and only handle the stick from its edges.
- Gently, but firmly push back the two side anchors that hold in the RAM using either an [iFixit Opening Tool](#) or your fingernails.

Step 4

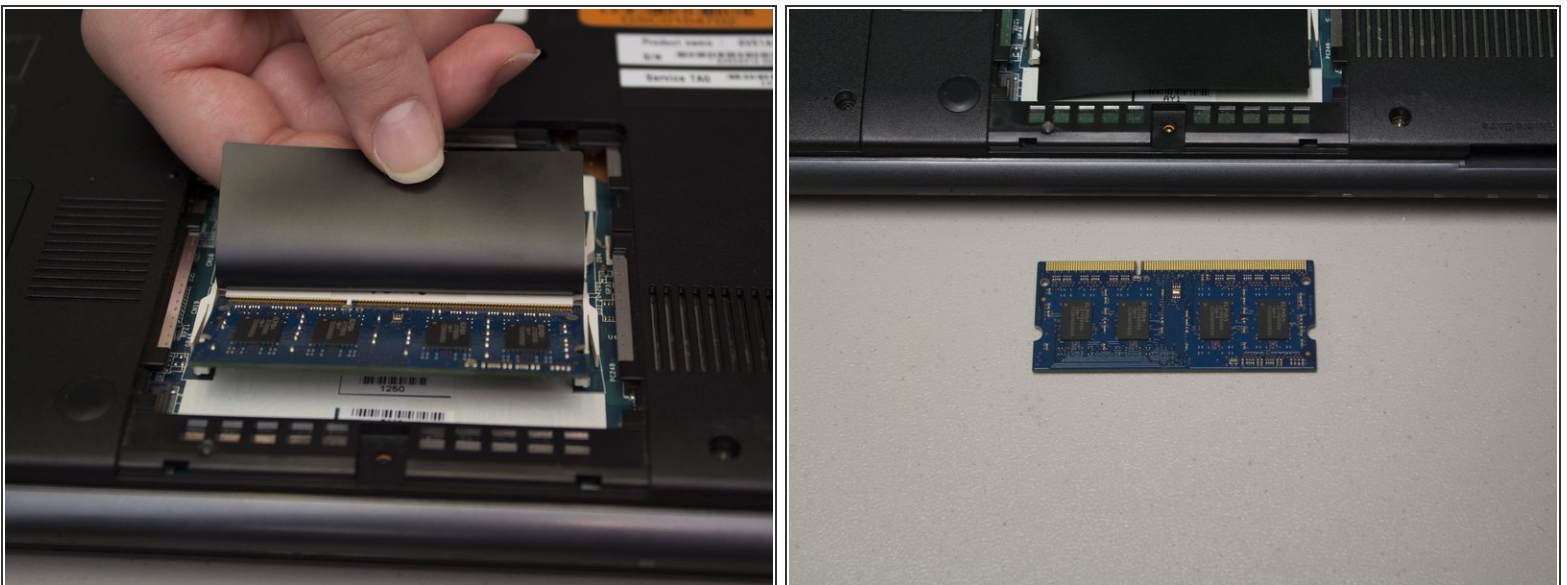

- ⓘ Once both anchors are released from the RAM stick, the stick will spring up at an angle
- Finally, carefully pull the RAM stick away from the laptop at the same angle it is sitting at.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-01-15 05:43:30 AM.