



Tesco hudl2 Battery Replacement

Replace the battery if the life is short or your hudl2 is starting to swell

Written By: Tim





TOOLS:

- [iFixit Opening Picks set of 6](#) (1)



PARTS:

- [hudl2 Battery](#) (1)

Step 1 — Open the case



⚠ Take your time!



- Use a guitar pick, although some have successfully used a fingernail. Don't use a screwdriver as you will damage the case.
- Start at one corner and carefully insert your tool, working it along the seam until you hear a click and the case starts to come apart.
- Carry on working your way around the case. Be very careful near the buttons.
- Eventually the rear case will come away. There aren't any wires attached to the rear case, it just lifts off.
- When it's time to reassemble, clip the rear cover back on carefully, making sure to fit the side with the buttons first and being careful to ensure they are positioned correctly.

Step 2



- This is what you will see once the rear case is removed.

Step 3 — Battery

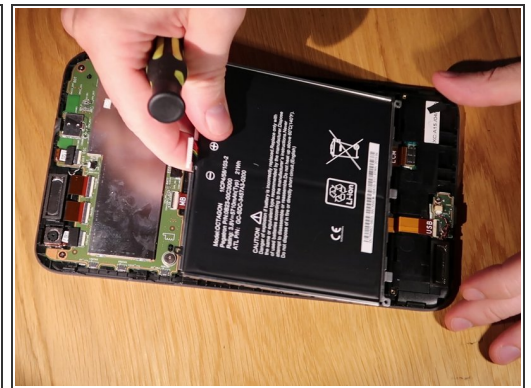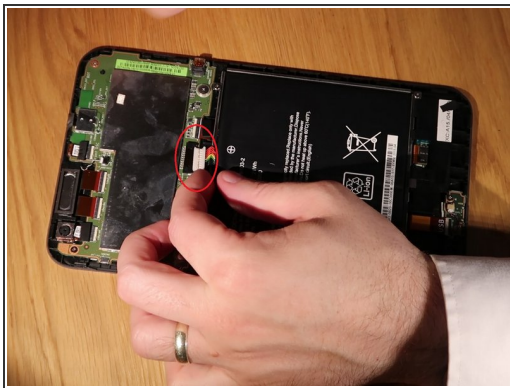

- Unplug the old battery by gently rocking the white plug back and forth.
- Unscrew the four screws holding the battery down.
- Lift the battery out.
- Put in the new battery, reinsert the plug and replace the four screws.
- Test your tablet and make sure it's working normally and will take charge.

