




# Dell Precision 7710 Memory Module Replacement


Written By: Johnathan Hammond

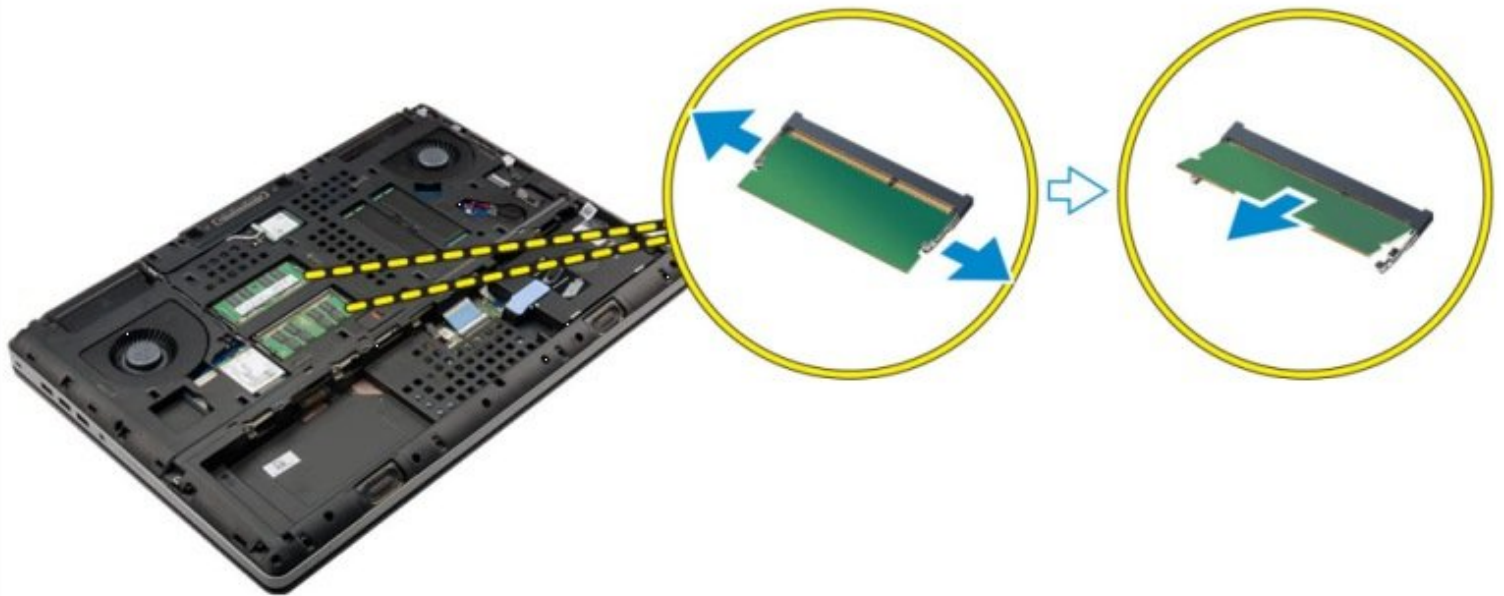

 **TOOLS:**


- Spudger (1)
  - Phillips #0 Screwdriver (1)
-

## Step 1 — Battery Cover

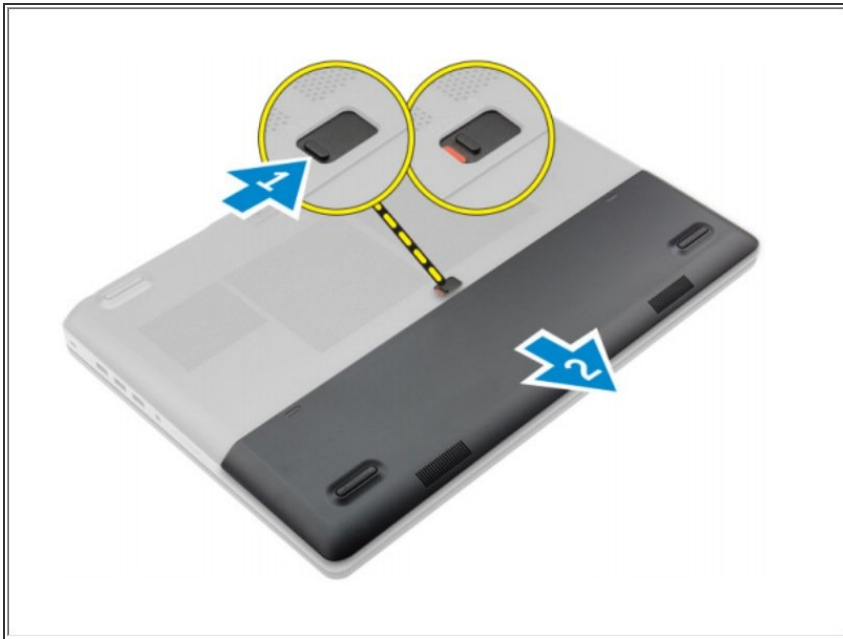


- Slide the release latch to unlock the battery cover [1].
- Slide and lift the battery cover to remove it from the computer [2].

## Step 2 — Battery

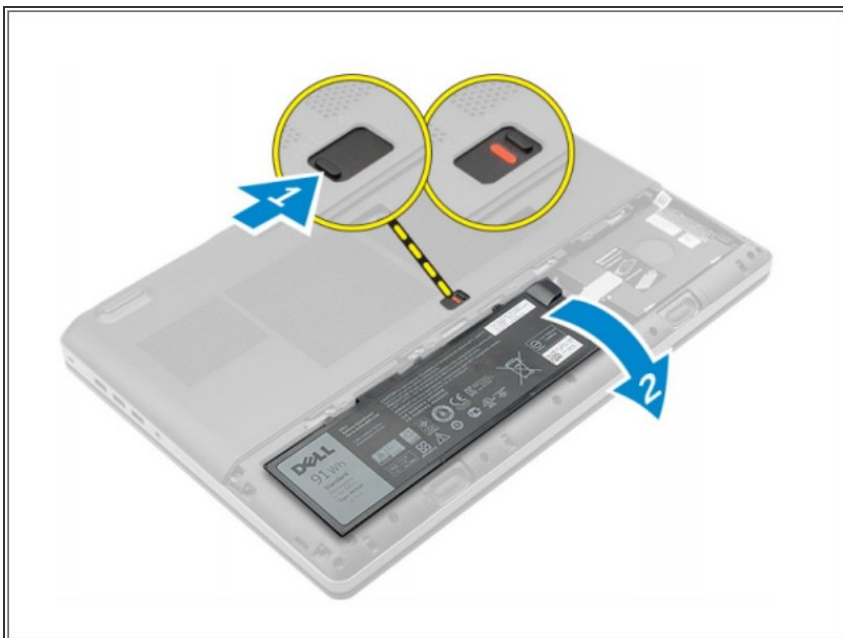



- Slide the release latch to unlock the battery [1].
- Lift and remove the battery from the computer [2].

### Step 3 — Base Cover

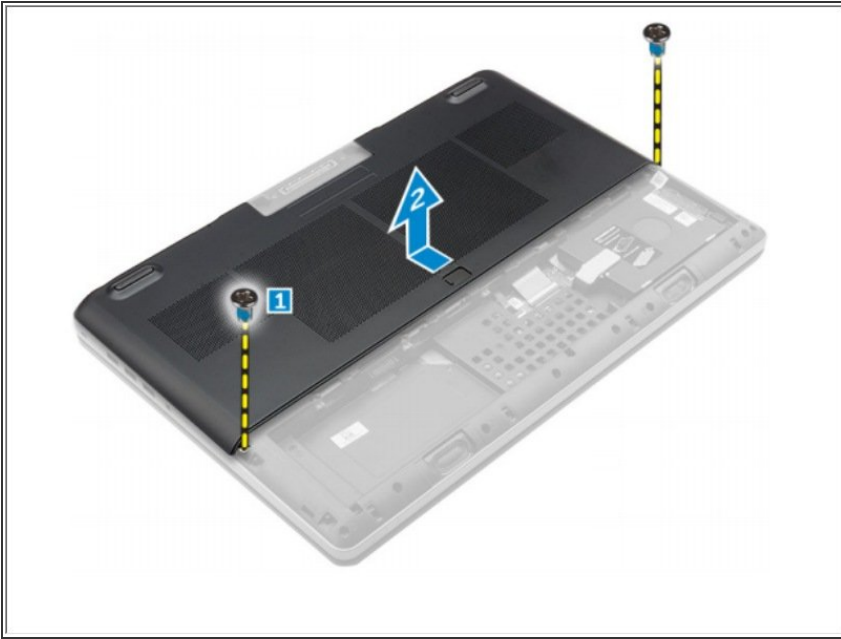


- Remove the screws that secure the base cover to the computer [1].
- Slide and lift the base cover away from the computer [2].

### Step 4 — KeyBoard

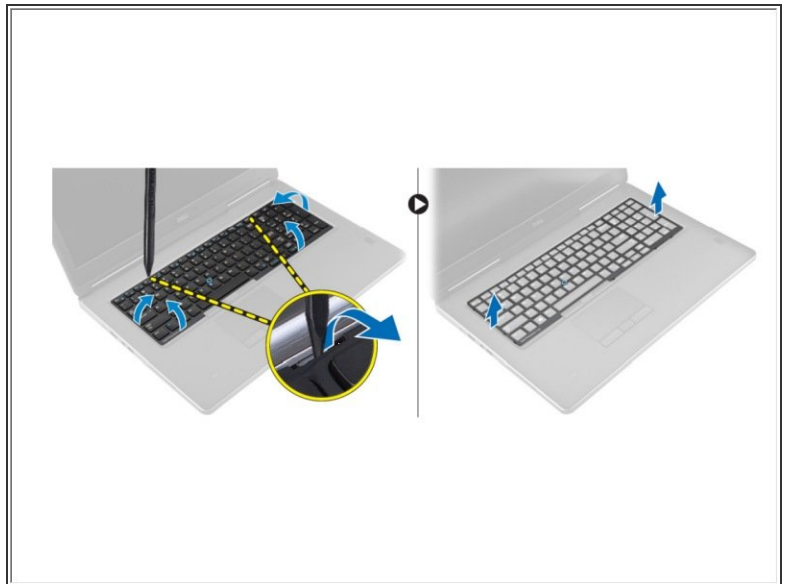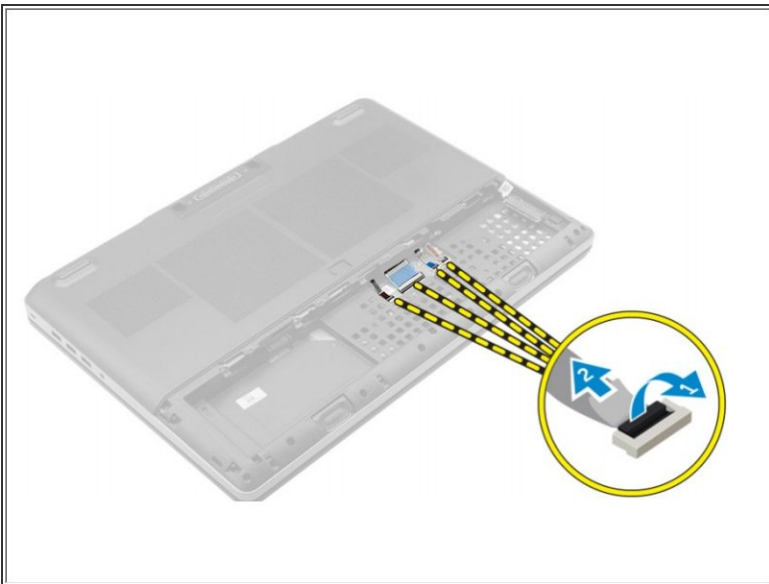


- Lift the tab and disconnect the 4 cables, one of the cables may be obstructed by the HDD, so you will need to unscrew/detach the HDD tray first [1, 2].
- Pry the keyboard trim starting from the bottom and work along the top edge and remove it from the computer.

## Step 5

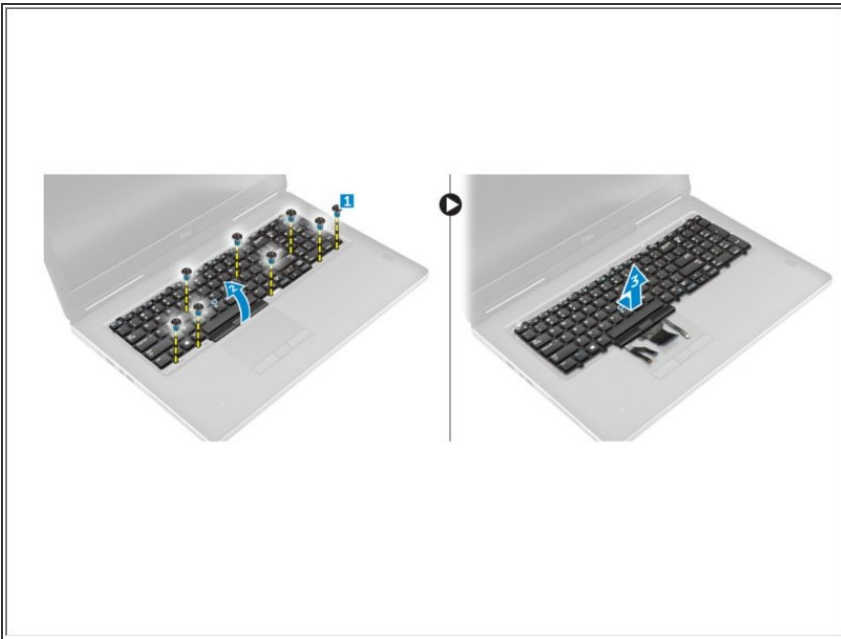


- Remove the screws that secure the keyboard to the computer [1].
- Lift the front side and slide the keyboard to remove it away from the computer [2, 3].

## Step 6 — Memory Module

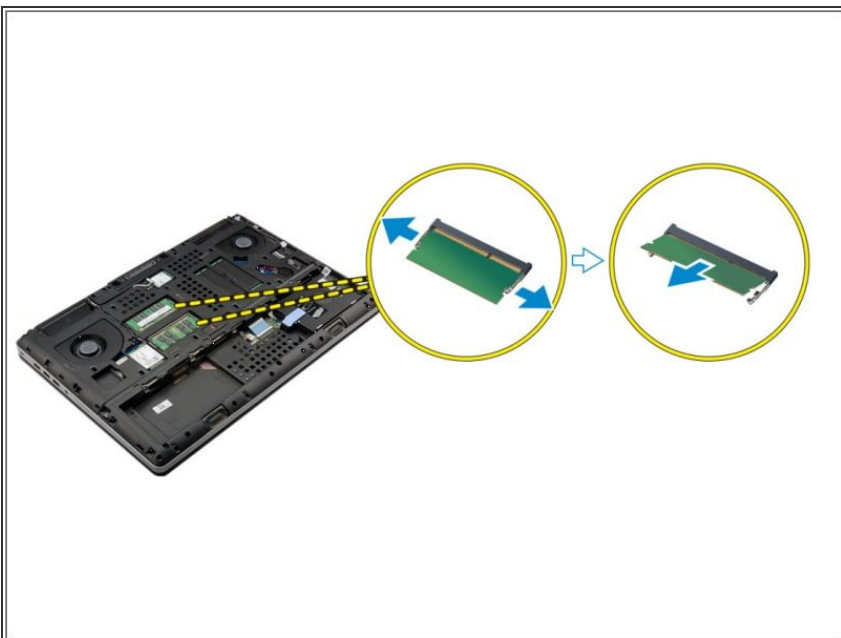

- Pry the retention clips away from the primary memory until it pops up.
- Lift the primary memory and remove it from the computer.

## Step 7

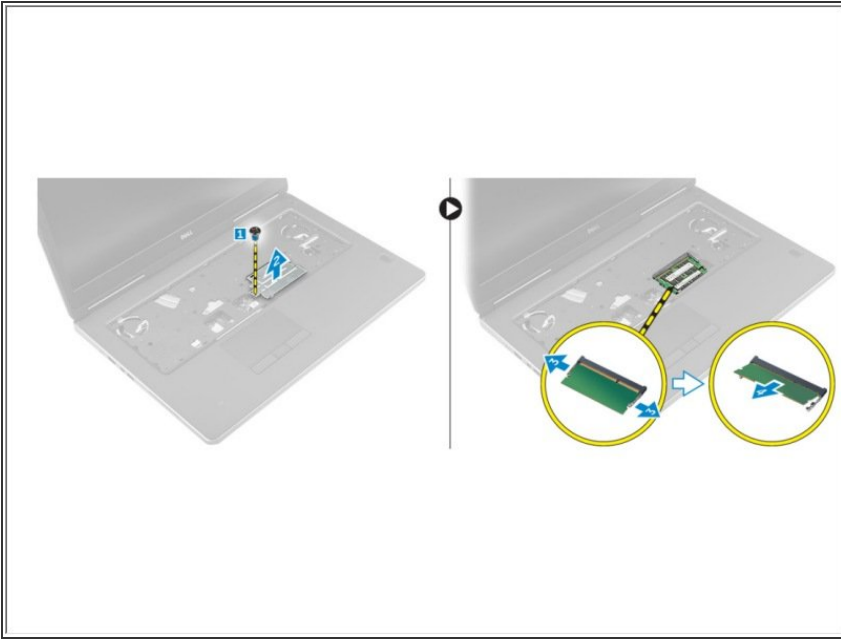

- Remove the screw that secures the memory shield to the computer [1].
- Lift and remove the memory shield from the computer [2].
- Pry the retention clips away from the memory module until it pops up [3].
- Lift the memory module and remove it from the computer [4].

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-01-14 03:27:09 PM.