



iMac G5 20" Model A1145 RAM Replacement

Written By: Andrew Bookholt



INTRODUCTION

Upgrade your RAM for an instant increase in speed.



TOOLS:

- [Phillips #1 Screwdriver](#) (1)



PARTS:

- [PC2-4200 2 GB RAM Chip \(Desktop\)](#) (1)

Step 1 — Access Door




- Orient the iMac face-side down on a table with the bottom edge facing yourself.
 - Remove the two Phillips screws securing the access door to the bottom grille of your iMac.
- i** The screws are captive in the access door.
- ⚠** **Before beginning the repair, unplug the computer and press and hold the power switch for 20-30 seconds, to discharge internal capacitors.**

Step 2




- Remove the access door.

Step 3 — RAM

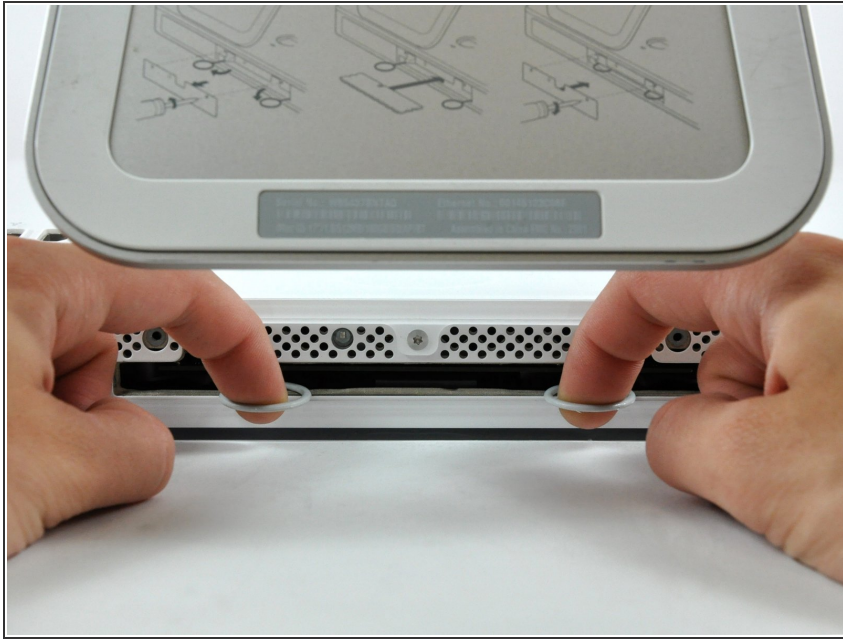

- Insert your fingers into the two RAM arms and pull both arms toward yourself to eject the RAM chip.

Step 4

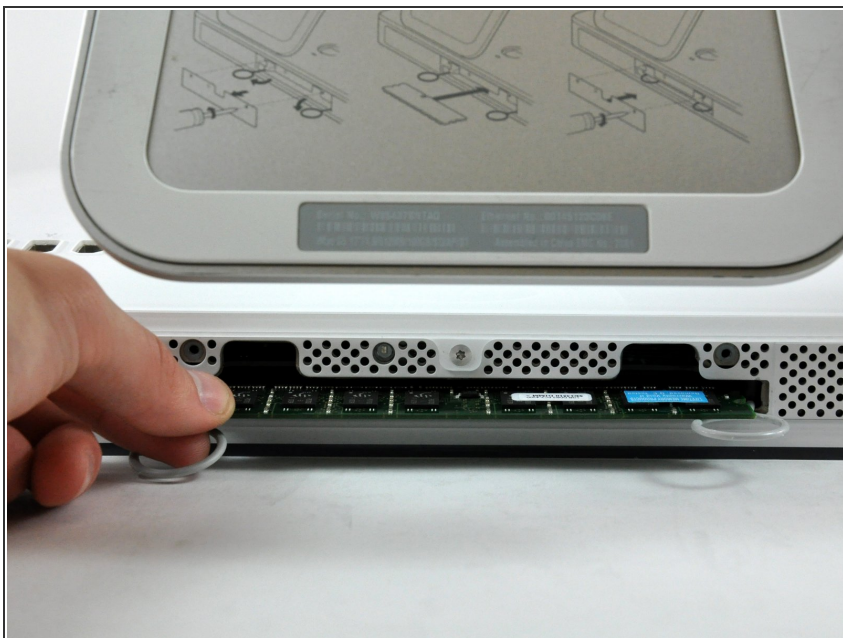

- Slide the RAM chip straight out of its socket.
- ⓘ Make sure both RAM arms are fully rotated outward before reinstalling your RAM chip.

To reassemble your device, follow these instructions in reverse order.