




# Samsung BlackJack II Front Casing Replacement

Install the front casing of your phone.

Written By: Ryan Rumsey

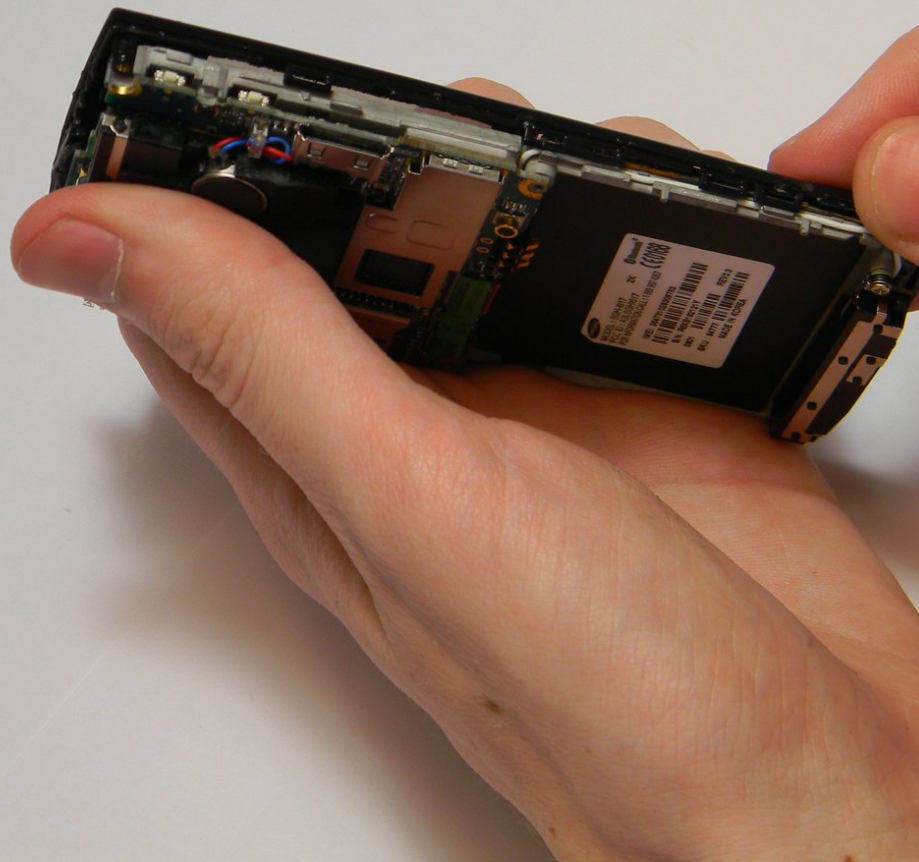

---

## INTRODUCTION


Use this guide to remove the front casing and to access the keypad.

---

### TOOLS:


- [Phillips #00 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [Spudger](#) (1)
-

## Step 1 — Battery

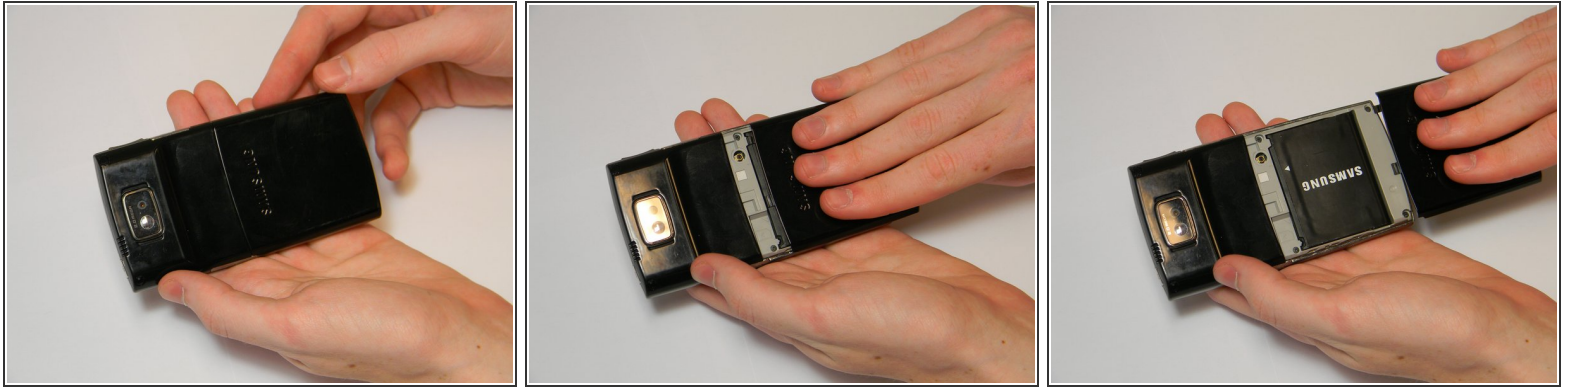


- Apply downward pressure to the top of the battery panel while pulling down to slide it off the phone.

## Step 2

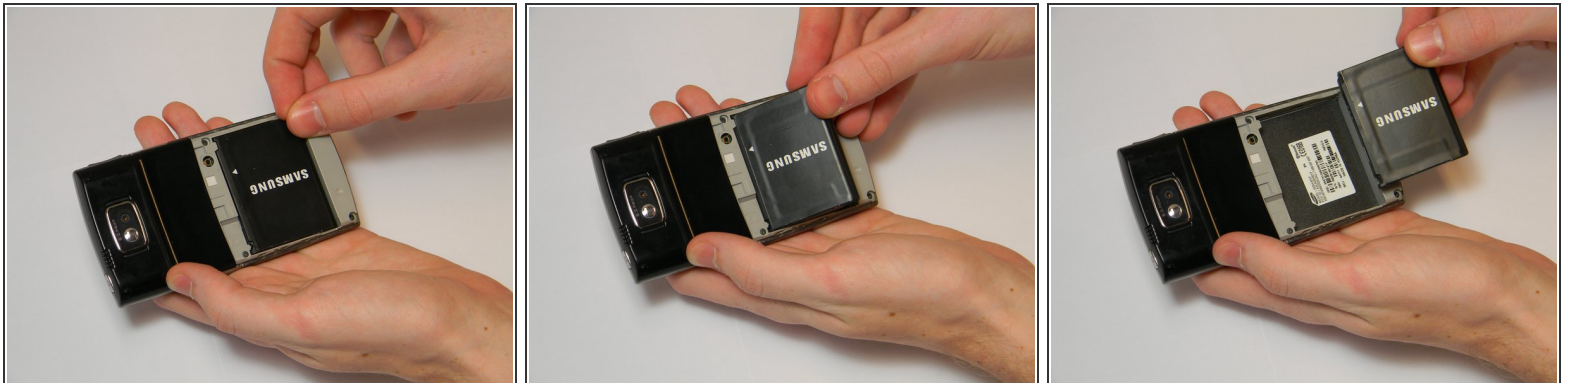


- Locate the grooves on the sides of the battery near the bottom of the phone. Use your fingers to pull the battery up and out of the phone.

### Step 3 — Back Casing

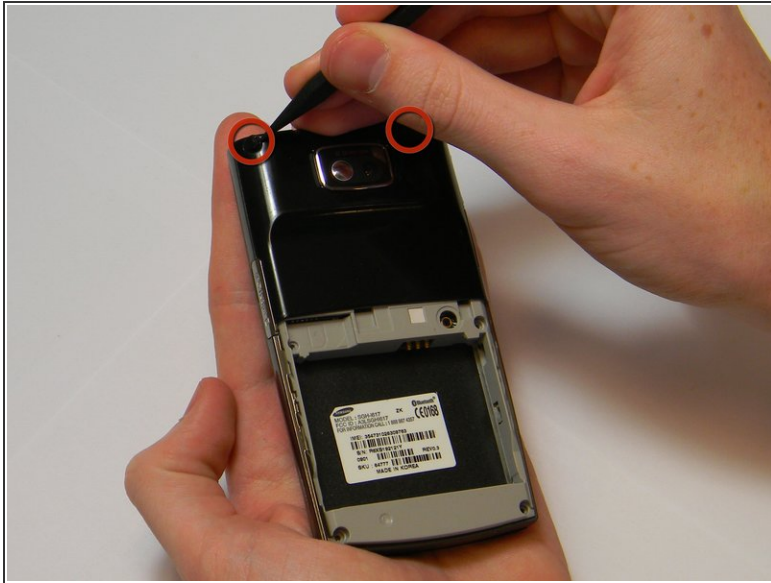


- Use the spudger to pry the two plastic caps out of the top corners of the phone casing.
- ⓘ To get a better grip, you may use the tweezers to finish pulling the plastic caps from the phone.

### Step 4

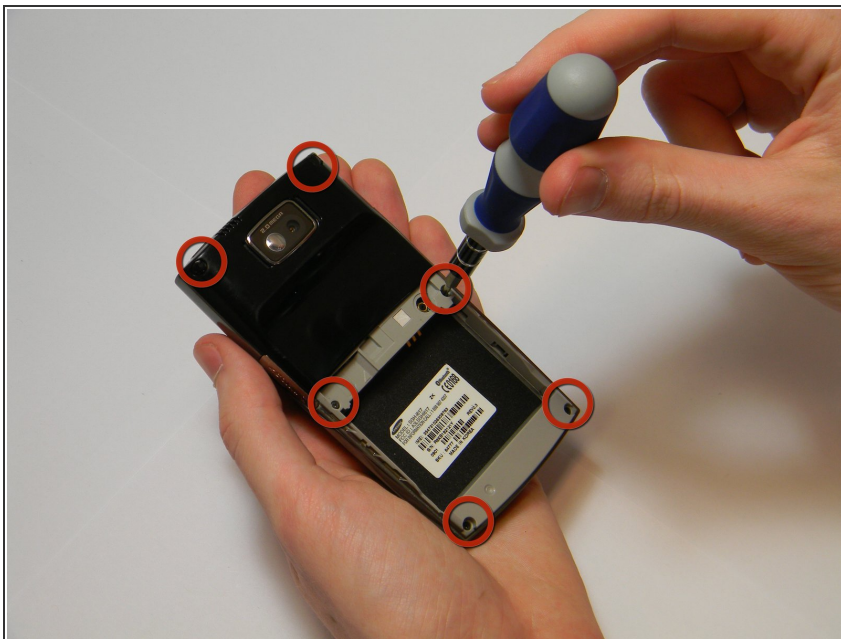


- Remove the six 4.0 mm screws using the Phillips 00 screwdriver.

## Step 5

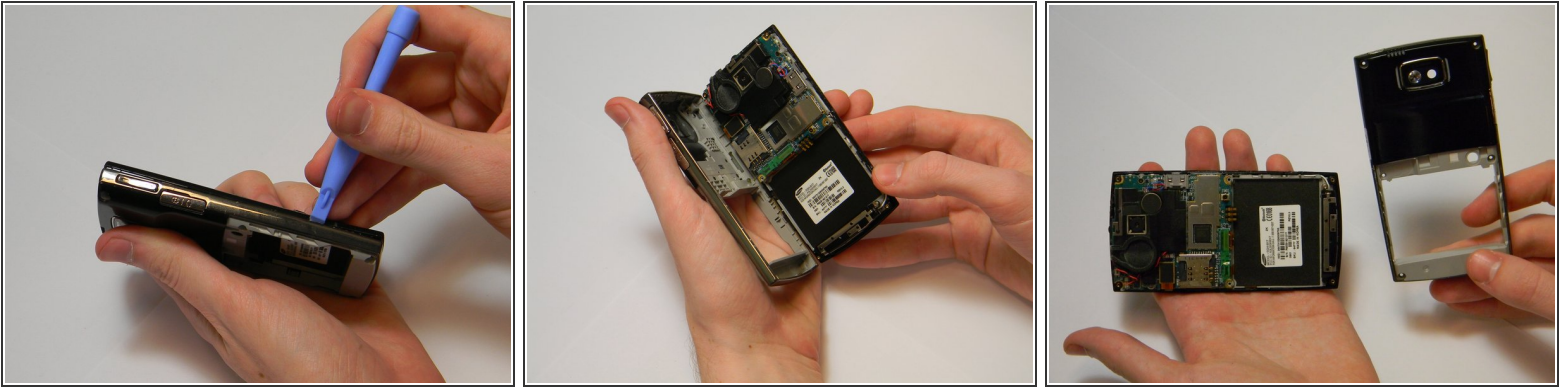

- Insert the plastic opening tool in the gap between the back panel and rest of the body.
- Slide the tool along the edges until the two pieces come apart.
- ⓘ The circuit board is attached to the front casing. Both casings should separate without having to sever electrical connections.

## Step 6 — Front Casing

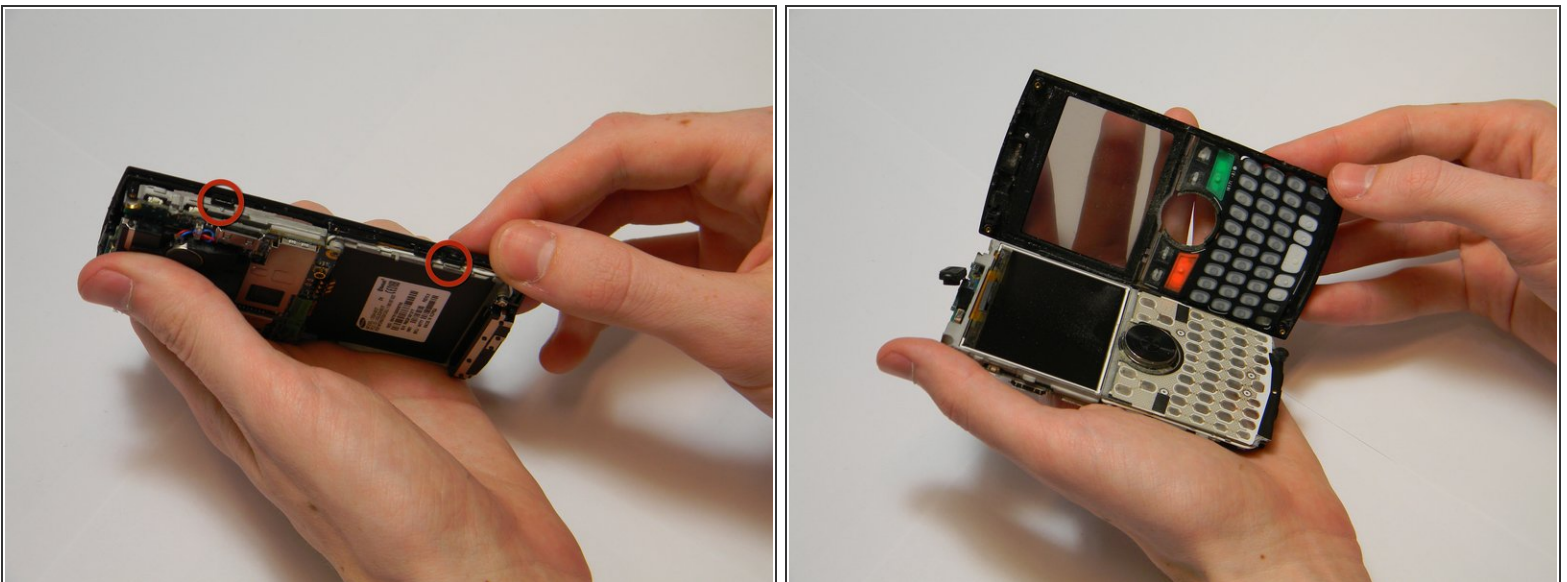

- Pry apart the plastic tabs along the edges of the phone.
- Separate the front panel from the main body of the phone using your fingers.

To reassemble your device, follow these instructions in reverse order.