



Nokia 2610 Keypad Replacement

This guide will help you find and replace the keypad inside the Nokia 2610 cell phone.

Written By: Jeff Carter



 **TOOLS:**

- [iFixit Opening Tools](#) (1)
-

Step 1 — Battery and Sim Card



- Place your thumb on the middle of the back cover and push it toward the bottom of the phone to slide the cover off.

Step 2



- Use a plastic opening tool (or your finger) to gently pry the battery out of the battery slot on the back of the phone.

Step 3



- Lift the metal sim card holder (at the bottom of the battery slot) up and carefully pry the sim card out of its slot with a plastic opening tool or your finger.
- After removal, lower the metal sim card holder into its original position.

Step 4 — Front Panel




- Insert the plastic opening tool into the crack between the front and back panels.
- Gently pry the front cover away from the back cover while sliding the plastic opening tool towards the top of the phone.

Step 5



- Lift the bottom of the front cover away from the phone.
 - Continue lifting until the top of the front cover is fully removed from the phone.
- i** Note: To replace the Keypad, gently lift it out of the front cover. It is located below the clear viewing window.

Step 6 — Keypad

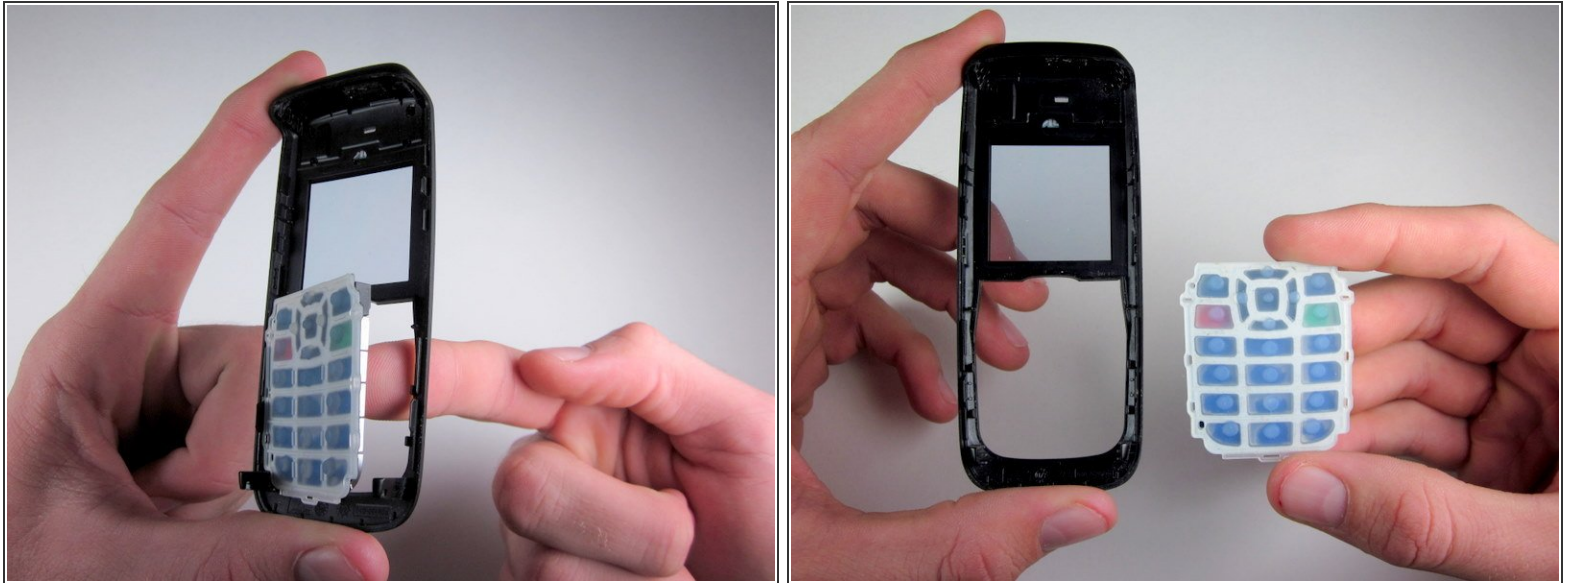

- Push on the keypad from the exterior of the phone's front cover to separate the keypad from the phone.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-14 12:18:59 PM.